

DRAFT

2022 BACTERIAL AND TURBIDITY TOTAL MAXIMUM DAILY LOADS FOR OKLAHOMA STREAMS IN THE SOUTHEAST OKLAHOMA

Oklahoma Waterbody Identification Numbers

Poteau River	OK220100010010_00
Poteau River	OK220100010010_10
Poteau River	OK220100020010_10
Lee Creek	OK220200050010_00
Mill Creek	OK220600010100_20
Brushy Creek	OK220600030010_00
Beaver Creek	OK220600040030_00
Terrapin Creek	OK410210020150_00
Red River	OK410400010010_20
Caney Creek	OK410400020200_00
North Boggy Creek	OK410400080010_00



Prepared by:

Oklahoma Department of Environmental Quality



JUNE 2022

This Page is Intentionally Left Blank

TABLE OF CONTENTS

TABLE OF CONTENTS	i
LIST OF FIGURES	v
LIST OF TABLES	vii
ACRONYMS AND ABBREVIATIONS	ix
EXECUTIVE SUMMARY	ES-1
ES - 1 Overview	ES-1
ES - 2 Problem Identification and Water Quality Target.....	ES-2
ES-2.1 Chapter 730: Criteria for Bacteria	ES-2
ES-2.2 Chapter 740: Implementation of OWQS for Bacteria ...	ES-4
ES-2.3 Chapter 730: Criteria for Turbidity	ES-5
ES-2.4 Chapter 740: Implementation of OWQS for Fish and Wildlife Propagation	ES-5
ES-2.5 Chapter 740: Minimum Number of Samples	ES-11
ES - 3 Pollutant Source Assessment.....	ES-12
ES - 4 Using Load Duration Curves to Develop TMDLs.....	ES-13
ES-4.1 Bacterial LDC.....	ES-16
ES-4.2 TSS LDC.....	ES-17
ES-4.3 LDC Summary	ES-17
ES - 5 TMDL Calculations	ES-17
ES-5.1 Bacterial PRG	ES-17
ES-5.2 TSS PRG	ES-18
ES-5.3 Seasonal Variation.....	ES-18
ES-5.4 MOS.....	ES-19
ES - 6 Reasonable Assurance.....	ES-19
ES - 7 Public Participation	ES-20
SECTION 1 INTRODUCTION	1-1
1.1 TMDL Program Background	1-1
1.1 Watershed Description	1-4
1.2.1 General	1-4
1.2.2 Climate	1-5
1.2.3 Land Use.....	1-6
1.2 Stream Flow Conditions	1-6
SECTION 2 PROBLEM IDENTIFICATION AND WATER QUALITY TARGET..	2-1
2.1 Oklahoma Water Quality Standards	2-1
2.1.1 Chapter 730: Definition of PBCR and Bacterial WQSS	2-3
2.1.2 Chapter 740: Implementation of OWQS for PBCR.....	2-4
2.1.3 Chapter 730: Criteria for Turbidity	2-5
2.1.4 Chapter 740: Implementation of OWQS for Fish and Wildlife Propagation.....	2-5
2.1.5 Chapter 740: Minimum Number of Samples	2-6
2.1.6 Prioritization of TMDL Development.....	2-7

2.2	Problem Identification	2-10
2.3.1	Bacterial Data Summary	2-10
2.3.2	Turbidity Data Summary	2-10
2.3	Water Quality Targets	2-11
SECTION 3	POLLUTANT SOURCE ASSESSMENT	3-1
3.1	Overview	3-1
3.2	OPDES-Permitted Facilities	3-2
3.2.1	Continuous Point Source Dischargers	3-3
3.2.1.1	Municipal OPDES WWTFs	3-3
3.2.1.2	Industrial OPDES WWTFs	3-4
3.2.2	Stormwater Permits	3-9
3.2.2.1	Municipal Separate Storm Sewer System Permit	3-9
3.2.2.1.1	Phase I MS4	3-9
3.2.2.1.2	Phase II MS4 (OKR04)	3-9
3.2.2.2	Multi-Sector General Permits (OKR05)	3-10
3.2.2.2.1	Regulated Sector J Discharges	3-13
3.2.2.2.2	Rock, Sand and Gravel Quarries	3-13
3.2.2.3	General Permit for Construction Activities (OKR10)	3-15
3.2.3	No-Discharge Facilities	3-17
3.2.4	Sanitary Sewer Overflows	3-17
3.2.5	Animal Feeding Operations	3-19
3.2.5.1	CAFO	3-19
3.2.5.2	SFO	3-20
3.2.5.3	PFO	3-21
3.2.6	Section 404 Permits	3-23
3.3	Nonpoint Sources	3-24
3.3.1	Wildlife	3-24
3.3.2	Non-Permitted Agricultural Activities and Domesticated Animals	3-25
3.3.3	Domestic Pets	3-27
3.3.4	Failing Onsite Wastewater Disposal Systems and Illicit Discharges	3-31
3.4	Summary of Sources of Impairment	3-33
3.4.1	Bacteria	3-33
3.4.2	Turbidity	3-34
SECTION 4	TECHNICAL APPROACH AND METHODS	4-1
4.1	Pollutant Loads and TMDLs	4-1
4.2	Determine a Surrogate Target for Turbidity	4-1
4.2.1	Steps Prior to Regression	4-1
4.2.2	Non-Detect Rate Less Than or Equal to ($\leq$) 15%	4-2
4.2.3	Non-Detect Rate is Greater Than 15%	4-4
4.3	Steps to Calculating TMDLs	4-6
4.3.1	Development of Flow Duration Curves	4-7
4.3.2	Using Flow Duration Curves to Calculate Load Duration Curves	4-8
4.3.2.1	Bacteria	4-8
4.3.2.2	TSS	4-9

4.3.3	Using Load Duration Curves to Develop TMDLs.....	4-9
4.3.3.1	Step 1 - Generate LDCs	4-9
4.3.3.1.1	Bacterial LDC.....	4-10
4.3.3.1.2	Turbidity LDC.....	4-11
4.3.3.2	Step 2 - Define MOS.....	4-11
4.3.3.3	Step 3 - Calculate WLA	4-11
4.3.3.3.1	WLA for Bacteria.....	4-12
4.3.3.3.2	WLA for TSS.....	4-12
4.3.3.3.3	WLA for Future Growth	4-13
4.3.3.4	Step 4 - Calculate LA and WLA for MS4s.....	4-13
4.3.3.4.1	Bacterial WLAs for MS4s	4-13
4.3.3.4.2	Turbidity WLA for MS4s	4-13
4.3.3.5	Step 5 - Estimate Percent Load Reduction.....	4-13
4.3.3.5.1	WLA Load Reduction	4-14
4.3.3.5.2	LA Load Reduction	4-14
SECTION 5	TMDL CALCULATIONS	5-1
5.1	Surrogate TMDL Target for Turbidity	5-1
5.2	Flow Duration Curve.....	5-5
5.3	Estimated Loading and Critical Conditions	5-11
5.3.1	Bacterial LDCs	5-11
5.3.2	TSS LDCs	5-14
5.3.3	Establish Percent Reduction Goals	5-18
5.3.3.1	Bacterial PRGs	5-18
5.3.3.2	TSS PRGs.....	5-19
5.4	Wasteload Allocation.....	5-19
5.4.1	Bacterial WLA	5-19
5.4.2	Total Suspended Solids WLA	5-21
5.4.3	WLA for Future Growth.....	5-21
5.4.4	Permit Implication	5-21
5.4.4.1	Bacterial Permit Limitations	5-21
5.4.4.2	TSS Permit Limitations	5-22
5.4.5	Section 404 permits	5-23
5.5	Load Allocation.....	5-23
5.6	Seasonal Variability.....	5-23
5.7	Margin of Safety	5-23
5.8	TMDL Calculations	5-24
5.9	Strength and Weakness	5-36
5.10	TMDL Implementation	5-36
5.9.1	Point Sources.....	5-36
5.9.2	Nonpoint Sources	5-37
5.11	Reasonable Assurances.....	5-38
SECTION 6	PUBLIC PARTICIPATION	6-1
SECTION 7	REFERENCES.....	7-1
Appendix A	Ambient Water Quality Data	A-1
Appendix B	OPDES Discharge Monitoring Report Data.....	B-1

Appendix C	General Method for Estimating Flow for Ungaged Streams and Estimated Flow Exceedance Percentiles	C-1
Appendix D	Censored Data Estimation for Southeast Oklahoma Study Area.....	D-1
Appendix E	Censored Data Regression for Southeast Oklahoma Study Area.....	E-1
Appendix F	Direct Calculation of Percent Reduction Goals from Turbidity Data	F-1
Appendix G	State of Oklahoma Antidegradation Policy	G-1
Appendix H	Stormwater Permitting Requirements and Presumptive Best Management Practices (BMP) Approach	H-1

LIST OF FIGURES

Figure 1-1	Watersheds Not Supporting Primary Body Contact Recreation or Fish & Wildlife Propagation Beneficial Uses in Southeast Oklahoma Study Area	1-4
Figure 1-2	Land Use Map	1-8
Figure 3-1	Location of OPDES-Permitted Facilities and AgPDES-Permitted AFOs in the Study Area	3-5
Figure 4-1	Linear Regression for TSS-Turbidity for the Red River (OK410400010010_20)	4-3
Figure 4-2	Regression Estimates by Parametric and Non-parametric Method	4-5
Figure 4-3	Flow Duration Curve for the Red River (OK410400010010_20)	4-8
Figure 5-1	TSS-Turbidity Regression Estimates of Brushy Creek (OK220600030010_00) for Mill Creek (OK220600010100_20) and North Boggy Creek (OK410400080010_00)	5-3
Figure 5-2	TSS-Turbidity Linear Regression for Brushy Creek (OK220600030010_00)	5-3
Figure 5-3	TSS-Turbidity Linear Regression for Beaver Creek (OK220600040030_00)	5-4
Figure 5-4	TSS-Turbidity Regression Estimates of Cloudy Creek (OK410210020150_00) for Terrapin Creek (OK410210020150_00)	5-4
Figure 5-5	Linear Regression for TSS-Turbidity for the Red River (OK410400010010_20)	5-5
Figure 5-6	TSS-Turbidity Regression Estimates of Goose Creek (OK410400030490_00) for Caney Creek (OK410400020200_00)	5-5
Figure 5-7	Flow Duration Curve for the Poteau River (OK220100010010_00)	5-6
Figure 5-8	Flow Duration Curve for Poteau River (OK220100020010_10)	5-6
Figure 5-9	Flow Duration Curve for Mill Creek (OK220600010100_20)	5-7
Figure 5-10	Flow Duration Curve for Brushy Creek (OK220600030010_00)	5-8
Figure 5-11	Flow Duration Curve for the Beaver Creek (OK220600040030_00)	5-9
Figure 5-12	Flow Duration Curve for the Terrapin Creek (OK410210020150_00)	5-9
Figure 5-13	Flow Duration Curve for the Red River (OK410400010010_20)	5-10
Figure 5-14	Flow Duration Curve for the Caney Creek (OK410400020200_00)	5-10
Figure 5-15	Flow Duration Curve for the North Boggy Creek (OK410400080010_00)	5-11
Figure 5-16	Load Duration Curve for Enterococci in Poteau River (OK220100010010_00)	5-12
Figure 5-17	Load Duration Curve for Enterococci in Poteau River (OK220100020010_10)	5-13
Figure 5-18	Load Duration Curve for <i>E. coli</i> in Poteau River (OK220100020010_10)	5-13
Figure 5-19	Load Duration Curve for Total Suspended Solids in the Mill Creek (OK220600010100_20)	5-15
Figure 5-20	Load Duration Curve for Total Suspended Solids in the Brushy Creek (OK220600030010_00)	5-15
Figure 5-21	Load Duration Curve for Total Suspended Solids in the Beaver Creek (OK220600040030_00)	5-16
Figure 5-22	Load Duration Curve for Total Suspended Solids in the Terrapin Creek (OK410210020150_00)	5-16
Figure 5-23	Load Duration Curve for Total Suspended Solids in the Red River (OK410400010010_20)	5-17
Figure 5-24	Load Duration Curve for Total Suspended Solids in the Caney Creek (OK410400020200_00)	5-17
Figure 5-25	Load Duration Curve for Total Suspended Solids in the North Boggy Creek (OK410400080010_00)	5-18
Appendix Figure D-1	Histogram of Turbidity Data	D-3

Appendix Figure D-2	Histograms for Simple Substitution	D-5
Appendix Figure D-3	EXCEL Histograms of Distributional Methods (MLE)	D-7
Appendix Figure D-4	Robust Method of Estimating TSS for Basin 2	D-8
Appendix Figure E-1	Trendlines Estimated for Mill Creek	E-3
Appendix Figure E-2	Trendlines Estimated for Brush Creek	E-4
Appendix Figure E-3	Trendlines Estimated for Terrapin Creek	E-4
Appendix Figure E-4	Trendlines Estimated for Cloudy Creek.....	E-5
Appendix Figure E-5	Trendlines Estimated for Caney Creek	E-5
Appendix Figure E-6	Trendlines Estimated for North Boggy Creek.....	E-6

LIST OF TABLES

Table ES - 1	Excerpt from the 2022 Integrated Report – Oklahoma 303(d) List of Impaired Waters	ES-8
Table ES - 2	Summary of Indicator Bacterial Samples from Primary Body Contact Recreation Subcategory Season May 1 to September 30, 2000-2020	ES-9
Table ES - 3	Summary of Turbidity Data Minus High Flow Samples, 2000-2021	ES-10
Table ES - 4	Summary of TSS Data Minus High Flow Samples, 1998-2021	ES-10
Table ES - 5	Regression Statistics and TSS Goals	ES-11
Table ES - 6	Stream and Pollutants for TMDL Development	ES-12
Table ES - 7	Summary of Potential Pollutant Sources by Category	ES-15
Table ES - 8	Percent Reductions Required to Meet Water Quality Standards for Indicator Bacteria	ES-18
Table ES - 9	TMDL Percent Reductions Required to Meet Water Quality Targets for Total Suspended Solids	ES-18
Table 1-1	TMDL Waterbodies	1-2
Table 1-2	Water Quality Monitoring Stations used for Assessment of Streams	1-3
Table 1-3	County Population and Density	1-5
Table 1-4	Major Municipalities by Watershed	1-5
Table 1-5	Average Annual Precipitation by Watershed	1-6
Table 1-6	Land Use Summaries by Watershed	1-9
Table 2-1	Designated Beneficial Uses for Each Stream Segment in the Study Area	2-2
Table 2-2	Excerpt from the 2022 Integrated Report – Oklahoma 303(d) List of Impaired Waters ..	2-9
Table 2-3	Summary of Assessment of Indicator Bacterial Samples from Primary Body Contact Recreation Subcategory Season May 1 to September 30, 2000-2020	2-13
Table 2-4	Summary of All Turbidity Samples, 2000-2021	2-14
Table 2-5	Summary of Turbidity Samples Excluding High Flow Samples, 2000-2021	2-14
Table 2-6	Summary of All TSS Samples, 1998-2021	2-15
Table 2-7	Summary of TSS Samples Excluding High Flow Samples, 1998-2021	2-15
Table 3-1	Point Source Discharges in the Study Area	3-6
Table 3-2	Multi-Sector General Permits in Study Area	3-11
Table 3-3	Construction Permits Summary	3-16
Table 3-4	Sanitary Sewer Overflow Summary (1990-2021)	3-18
Table 3-5	Registered PFOs in Study Area	3-22
Table 3-6	Estimated Population and Fecal Coliform Production for Deer	3-25
Table 3-7	Daily Fecal Coliform Production Rates by Animal Species	3-26
Table 3-8	Estimated Numbers of Pets	3-27
Table 3-9	Estimated Fecal Coliform Daily Production by Pets	3-27
Table 3-10	Commercially Raised Farm Animals and Manure Application Area Estimates by Watershed	3-29
Table 3-11	Fecal Coliform Production Estimates for Commercially Raised Farm Animals (x10 ⁹ number/day)	3-30
Table 3-12	Estimates of Sewered and Unsewered Households	3-32
Table 3-13	Estimated Fecal Coliform Load from OSWD Systems	3-32
Table 3-14	Percentage Contribution of Fecal Coliform Load Estimates from Nonpoint Sources to Land Surfaces	3-33
Table 5-1	Censored TSS Data in Base Flow	5-1

Table 5-2	Regression Statistics and TSS Goals	5-2
Table 5-3	TMDL Percent Reductions Required to Meet Water Quality Standards for Indicator Bacteria	5-19
Table 5-4	TMDL Percent Reductions Required to Meet Water Quality Targets for Total Suspended Solids	5-19
Table 5-5	Bacterial Wasteload Allocations for OPDES-Permitted Facilities	5-20
Table 5-6	Summaries of Bacterial TMDLs	5-25
Table 5-7	Summaries of TSS TMDLs	5-25
Table 5-8	Enterococci TMDL Calculations for Poteau River (OK220100010010_00)	5-26
Table 5-9	Enterococci TMDL Calculations for Poteau River (OK220100020010_10)	5-27
Table 5-10	<i>E. coli</i> TMDL Calculations for the Poteau River (OK220100020010_10)	5-28
Table 5-11	Total Suspended Solids TMDL Calculations for the Mill Creek (OK220600010100_20)	5-29
Table 5-12	Total Suspended Solids TMDL Calculations for the Brushy Creek (OK220600030010_00)	5-30
Table 5-13	Total Suspended Solids TMDL Calculations for the Beaver Creek (OK220600040030_00)	5-31
Table 5-14	Total Suspended Solids TMDL Calculations for the Terrapin Creek (OK410210020150_00)	5-32
Table 5-15	Total Suspended Solids TMDL Calculations for the Red River (OK410400010010_20) ..	5-33
Table 5-16	Total Suspended Solids TMDL Calculations for the Caney Creek (OK410400020200_00)	5-34
Table 5-17	Total Suspended Solids TMDL Calculations for the North Boggy Creek (OK410400080010_00)	5-35
Table 5-18	Partial List of Oklahoma Water Quality Management Agencies	5-36
Appendix Table A-1	Bacterial Data: 2000 to 2020	A-2
Appendix Table A-2	Turbidity and Total Suspended Solids Data (2000-2021)	A-5
Appendix Table B-1	OPDES Discharge Monitoring Report Data	B-2
Appendix Table C-1	Estimated Flow Exceedance Percentiles	C-4
Appendix Table D-1	Censored TSS Data in Base Flow for WWAC Waterbodies	D-2
Appendix Table D-2	Log Distribution Summary Statistics for Basin 2	D-10
Appendix Table E-1	Regression Statistics with Censored Data	E-7
Appendix Table F-1	Percent Reduction Goals	F-2
Appendix Table H-1	MS4 Permit affected by this TMDL Report	H-3
Appendix Table H-2	Some BMPs Applicable to Bacteria	H-6

ACRONYMS AND ABBREVIATIONS

AEMS	Agricultural Environmental Management Service
AFO	Animal Feeding Operation
AgPDES	Agriculture Pollutant Discharge Elimination System
ASAE	American Society of Agricultural Engineers
AVMA	American Veterinary Medical Association
BMP	Best management practices
BOD	Biochemical Oxygen Demand
BUMP	Beneficial Use Monitoring Program
CAFO	Concentrated Animal Feeding Operation
CBOD	Carbonaceous Biochemical Oxygen Demand
CFR	Code of Federal Regulations
cfs	cubic feet per second
CN	Curve number
CPP	Continuing Planning Process
CWA	Clean Water Act
CWAC	Cool water aquatic community
DEM	Digital Elevation Model
DEQ	Oklahoma Department of Environmental Quality
DMR	Discharge monitoring report
<i>E. coli</i>	<i>Escherichia coli</i>
ENT	Enterococci
EPA	U.S. Environmental Protection Agency
GIS	Geographic Information System
HUC	Hydrologic unit code
IQR	Interquartile range
LA	Load allocation
LDC	Load duration curve
LOC	Line of organic correlation
mg	Million gallons

mgd	Million gallons per day
mg/L	Milligram per liter
mL	Milliliter
MOS	Margin of safety
MS4	Municipal separate storm sewer system
MSGP	Multi-Sector General Permit
NASS	USDA's National Agricultural Statistics Service
NED	National Elevation Dataset
NHD	National Hydrography Dataset
NLCD	National Land Cover Dataset
NPDES	National Pollutant Discharge Elimination System
NPS	Nonpoint source
NRCS	Natural Resources Conservation Service
NRMSE	Normalized root mean square error
NTU	Nephelometric turbidity unit
NWIS	National Water Information System
OAC	Oklahoma Administrative Code
OCC	Oklahoma Conservation Commission
OLS	Ordinary least square
O.S.	Oklahoma statute
ODAFF	Oklahoma Department of Agriculture, Food and Forestry
OKWBID	Oklahoma Waterbody Identification Number
OPDES	Oklahoma Pollutant Discharge Elimination System
OSWD	Onsite wastewater disposal
OWQS	Oklahoma Water Quality Standards
OWRB	Oklahoma Water Resources Board
PBCR	Primary Body Contact Recreation
PRG	Percent reduction goal
r²	Correlation coefficient
RMSE	Root mean square error
SH	State Highway
SSO	Sanitary sewer overflow

STORET	EPA Storage and Retrieval System
TMDL	Total Maximum Daily Load
TSS	Total Suspended Solids
USACE	United States Army Corps of Engineers
USDA	U.S. Department of Agriculture
USGS	U.S. Geological Survey
WWAC	warm water aquatic community
WLA	wasteload allocation
WQ	Water Quality
WQM	Water quality monitoring
WQMP	Water Quality Management Plan
WQS	Water quality standard
WWTF	wastewater treatment facility

EXECUTIVE SUMMARY

ES - 1 Overview

As promulgated by Section 402 of the Clean Water Act (CWA), the U.S. Environmental Protection Agency (EPA) has [delegated authority](#) to the Oklahoma Department of Environmental Quality (DEQ) to partially oversee the [National Pollutant Discharge Elimination System \(NPDES\) Program](#) in the State of Oklahoma. Exceptions are agriculture [retained by the Oklahoma Department of Agriculture, Food, and Forestry (ODAFF)], and the oil & gas industry (retained by the Oklahoma Corporation Commission) for which EPA has retained permitting authority. The NPDES Program in Oklahoma, in accordance with an agreement between DEQ and EPA, is implemented via the Oklahoma Pollutant Discharge Elimination System (OPDES) Act [Title 252, Chapter 606 (<https://www.deq.ok.gov/wp-content/uploads/deqmainresources/606.pdf>)].

This total maximum daily load (TMDL) report documents the data and assessment used to establish TMDLs for the pathogen indicator bacteria [*Escherichia coli* (*E. coli*), Enterococci] or turbidity for selected waterbodies in the Southeast Oklahoma Study Area. Elevated levels of pathogen indicator bacteria in aquatic environments indicate that a waterbody is contaminated with human or animal feces and that a potential health risk exists for individuals exposed to the water. Elevated turbidity levels caused by excessive sediment loading and stream bank erosion impact aquatic communities.

Data assessment and TMDL calculations are conducted in accordance with requirements of Section 303(d) of the CWA, Water Quality Planning and Management Regulations (40 CFR § Part 130), EPA guidance, and DEQ guidance and procedures. DEQ is required to develop TMDLs for all impaired waterbodies which are on the 303(d) list. The draft TMDL went to EPA for review before it was submitted for public comment. After the public comment period, the TMDL was submitted to EPA for final approval. Once EPA approves the final TMDL, then the waterbody is moved to Category 4a of the Integrated Report, where it remains until it reaches compliance with Oklahoma's water quality standards (WQS).

These TMDLs provide a load reduction to meet ambient water quality criterion with a given set of facts. The adoption of these TMDLs into the Water Quality Management Plan (WQMP) provides a mechanism to recalculate acceptable pollutant loads when information changes in the future. Updates to the WQMP demonstrate compliance with the water quality criterion. The updates to the WQMP are also useful when the water quality criterion changes and loading scenarios are reviewed to ensure that the predicted in-stream criterion will be met.

The purpose of this TMDL study was to establish pollutant load allocations for indicator bacteria and turbidity in impaired waterbodies, which is the first step toward restoring water quality and protecting public health. TMDLs determine the pollutant loading a waterbody can assimilate without exceeding the WQS for that pollutant. TMDLs also establish the pollutant load allocation necessary to meet the WQS established for a waterbody based on the relationship between pollutant sources and in-

stream water quality conditions. A TMDL consists of wasteload allocations (WLA), load allocations (LA), and a margin of safety (MOS). A WLA is the fraction of the total pollutant load apportioned to point sources and includes stormwater discharges regulated under OPDES as point sources. A LA is the fraction of the total pollutant load apportioned to nonpoint sources. MOS can be implicit and/or explicit. The implicit MOS is achieved by using conservative assumptions in the TMDL calculations. An explicit MOS is a percentage of the TMDL set aside to account for the lack of knowledge associated with natural process in aquatic systems, model assumptions, and data limitations.

This report does not stipulate specific control actions (regulatory controls) or management measures (voluntary best management practices) necessary to reduce bacteria and turbidity within each watershed. Watershed-specific control actions and management measures will be identified, selected, and implemented under a separate process involving stakeholders who live and work in the watersheds, along with native tribes, and local, State, and federal government agencies.

ES - 2 Problem Identification and Water Quality Target

This TMDL study focused on waterbodies in the Southeast Oklahoma Study Area, identified in **Table ES - 1**, that DEQ placed in Category 5 [303(d) list] of the *Water Quality in Oklahoma, 2022 Integrated Report* for nonsupport of primary body contact recreation (PBCR) or the Fish and Wildlife Propagation-Warm Water Aquatic Community (WWAC)/Fish and Wildlife Propagation-Cool Water Aquatic Community (CWAC) beneficial uses.

Elevated levels of bacteria or turbidity above the WQS necessitates the development of a TMDL. The TMDLs established in this report are a necessary step in the process to develop the pollutant loading controls needed to restore the PBCR or the Fish & Wildlife Propagation beneficial uses designated for each waterbody.

Table ES - 2 summarizes water quality data collected during primary contact recreation season from the water quality monitoring (WQM) stations between 2000 and 2021 for each bacterial indicator. The data summary in **Table ES - 2** provides a general understanding of the amount of water quality data available and the severity of exceedances of the water quality criteria. This data collected during the primary contact recreation season includes the data used to support the decision to place specific waterbodies within the Study Area on the DEQ 2022 303(d) list (DEQ 2022).

ES-2.1 Chapter 730: Criteria for Bacteria

The definition of PBCR and the bacterial WQSs for PBCR are summarized by the following excerpt from Title 252, Chapter 730-5-16 of the Oklahoma WQSs.

- (a). *Primary Body Contact Recreation involves direct body contact with the water where a possibility of ingestion exists. In these cases the water shall not contain chemical, physical or biological substances in concentrations that are irritating to skin or sense organs or are toxic or cause illness upon ingestion by human beings.*

- (b). *In waters designated for Primary Body Contact Recreation the following limits for bacteria set forth in (c) of this section shall apply only during the recreation period of May 1 to September 30. The criteria for Secondary Body Contact Recreation will apply during the remainder of the year.*
- (c). *Compliance with 252:730-5-16 shall be based upon meeting the requirements of one of the options specified in (1) or (2) of this subsection (c) for bacteria. Upon selection of one (1) group or test method, said method shall be used exclusively over the time period prescribed therefor. Provided, where concurrent data exist for multiple bacterial indicators on the same waterbody or waterbody segment, no criteria exceedances shall be allowed for any indicator group.*
- (1) *Escherichia coli (E. coli): The E. coli geometric mean criterion is 126/100 ml. For swimming advisory and permitting purposes, E. coli shall not exceed a monthly geometric mean of 126/100 ml based upon a minimum of not less than five (5) samples collected over a period of not more than thirty (30) days. For swimming advisory and permitting purposes, no sample shall exceed a 75% one-sided confidence level of 235/100 ml in lakes and high use waterbodies and the 90% one-sided confidence level of 406/100 ml in all other Primary Body Contact Recreation beneficial use areas. These values are based upon all samples collected over the recreation period. For purposes of sections 303(d) and 305(b) of the federal Clean Water Act as amended, beneficial use support status shall be assessed using only the geometric mean criterion of 126/100 milliliters compared to the geometric mean of all samples collected over the recreation period.*
- (2) *Enterococci: The Enterococci geometric mean criterion is 33/100 ml. For swimming advisory and permitting purposes, Enterococci shall not exceed a monthly geometric mean of 33/100 ml based upon a minimum of not less than five (5) samples collected over a period of not more than thirty (30) days. For swimming advisory and permitting purposes, no sample shall exceed a 75% one-sided confidence level of 61/100 ml in lakes and high use waterbodies and the 90% one-sided confidence level of 108/100 ml in all other Primary Body Contact Recreation beneficial use areas. These values are based upon all samples collected over the recreation period. For purposes of sections 303(d) and 305(b) of the federal Clean Water Act as amended, beneficial use support status shall be assessed using only the geometric mean criterion of 33/100 milliliters compared to the geometric mean of all samples collected over the recreation period.*

ES-2.2 Chapter 740: Implementation of OWQS for Bacteria

To implement Oklahoma's WQS for PBCR, DEQ promulgated Chapter 740, *Implementation of Oklahoma's Water Quality Standards* (DEQ 2022). The excerpt below from Chapter 740 (OAC 252:740-15-6), stipulates how water quality data will be assessed to determine support of the PBCR use as well as how the water quality target for TMDLs will be defined for each bacterial indicator.

(a). **Scope.**

The provisions of this Section shall be used to determine whether the subcategory of Primary Body Contact of the beneficial use of Recreation designated in OAC 252:730 for a waterbody is supported during the recreation season from May 1 through September 30 each year. Where data exist for multiple bacterial indicators on the same waterbody or waterbody segment, the determination of use support shall be based upon the use and application of all applicable tests and data.

(b). ***Escherichia coli (E. coli).***

(1) *The Primary Body Contact Recreation subcategory designated for a waterbody shall be deemed to be fully supported with respect to E. coli if the geometric mean of 126 colonies per 100 ml is met. These values are based upon all samples collected over the recreation period in accordance with OAC 252:740-15-3(c).*

(2) *The Primary Body Contact Recreation subcategory designated for a waterbody shall be deemed to be not supported with respect to E. coli if the geometric mean of 126 colonies per 100 ml is not met. These values are based upon all samples collected over the recreation period in accordance with OAC 252:740-15-3(c).*

(c). ***Enterococci.***

(1) *The Primary Body Contact Recreation subcategory designated for a waterbody shall be deemed to be fully supported with respect to Enterococci if the geometric mean of 33 colonies per 100 ml is met. These values are based upon all samples collected over the recreation period in accordance with OAC 252:740-15-3(c).*

(2) *The Primary Body Contact Recreation subcategory designated for a waterbody shall be deemed to be not supported with respect to Enterococci if the geometric mean of 33 colonies per 100 ml is not met. These values are based upon all samples collected over the recreation period in accordance with OAC 252:740-15-3(c).*

Where concurrent data exist for multiple bacterial indicators on the same waterbody, each indicator group must demonstrate compliance with the numeric criteria prescribed (DEQ 2022).

As stipulated in the WQS, only the geometric mean of all samples collected over the recreation period shall be used to assess the impairment status of a stream. Therefore, only the geometric mean criteria are used to develop TMDLs for *E. coli* and Enterococci bacterial indicators.

It is worth noting that the Oklahoma Water Quality Standards (WQS) prior to July 1, 2011 contained three bacterial indicators (fecal coliform, *E. coli*, and Enterococci). Since July 1, 2011, the WQS address only *E. coli* and Enterococci bacteria. Therefore, bacterial TMDLs are developed only for *E. coli* and/or Enterococci impaired streams.

ES-2.3 Chapter 730: Criteria for Turbidity

The beneficial use of WWAC is one of several subcategories of the Fish and Wildlife Propagation use established to manage the variety of communities of fish and shellfish throughout the State (DEQ 2022). The numeric criteria for turbidity to maintain and protect the use of “Fish and Wildlife Propagation” from Title 252:730-5-12(f)(7) is as follows:

- (A) *Turbidity from other than natural sources shall be restricted to not exceed the following numerical limits:*
 - i. *Cool Water Aquatic Community/Trout Fisheries: 10 NTUs;*
 - ii. *Lakes: 25 NTU; and*
 - iii. *Other surface waters: 50 NTUs.*
- (B) *In waters where background turbidity exceeds these values, turbidity from point sources will be restricted to not exceed ambient levels.*
- (C) *Numerical criteria listed in (A) of this paragraph apply only to seasonal base flow conditions.*
- (D) *Elevated turbidity levels may be expected during, and for several days after, a runoff event.*

ES-2.4 Chapter 740: Implementation of OWQS for Fish and Wildlife Propagation

Chapter 740, *Implementation of Oklahoma’s Water Quality Standards* (DEQ 2022) describes Oklahoma’s WQS for Fish and Wildlife Propagation. The excerpt below from Chapter 740 (OAC 252:740-15-5), stipulates how water quality data will be assessed to determine support of fish and wildlife propagation as well as how the water quality target for TMDLs will be defined for turbidity.

Assessment of Fish and Wildlife Propagation support

- (a). *Scope. The provisions of this Section shall be used to determine whether the beneficial use of Fish and Wildlife Propagation or any subcategory thereof designated in OAC 252:730 for a waterbody is supported.*
- (e). *Turbidity. The criteria for turbidity stated in 252:730-5-12(f)(7) shall constitute the screening levels for turbidity. The tests for use support shall follow the default protocol in 252:740-15-4(b).*

252:740-15-4. Default protocols

- (b). *Short term average numerical parameters.*
 - (1) *Short term average numerical parameters are based upon exposure periods of less than seven days. Short term average parameters to which this Section applies include, but are not limited to, sample standards and turbidity.*
 - (2) *A beneficial use shall be deemed to be fully supported for a given parameter whose criterion is based upon a short term average if 10% or less of the samples for that parameter exceeds the applicable screening level prescribed in this Subchapter.*
 - (3) *A beneficial use shall be deemed to be fully supported but threatened if the use is supported currently but the appropriate state environmental agency determines that available data indicate that during the next five years the use may become not supported due to anticipated sources or adverse trends of pollution not prevented or controlled. If data from the preceding two year period indicate a trend away from impairment, the appropriate agency shall remove the threatened status.*
 - (4) *A beneficial use shall be deemed to be not supported for a given parameter whose criterion is based upon a short term average if at least 10% of the samples for that parameter exceed the applicable screening level prescribed in this Subchapter.*

Turbidity is a measure of water clarity and is caused by suspended particles in the water column. Because turbidity cannot be expressed as a mass load, total suspended solids (TSS) are used as a surrogate for the TMDLs in this report. Therefore, both turbidity and TSS data are presented.

Table ES - 3 and **Table ES - 4** summarizes a subset of water quality data collected for turbidity and TSS under base flow conditions, which DEQ considers to be all flows less than the 25th flow exceedance percentile (i.e., the lower 75% of flows). Water quality samples collected under flow conditions greater than the 25th flow exceedance percentile (highest flows) were therefore excluded from the data set used for TMDL analysis. **Table ES - 5** shows the regression statistics, TSS target, NMRSE, and MOS for each waterbody receiving a turbidity TMDL in this report.

Table ES - 1 Excerpt from the 2022 Integrated Report – Oklahoma 303(d) List of Impaired Waters

Waterbody ID	Waterbody Name	Stream Miles	TMDL Date	Priority	ENT	<i>E. coli</i>	Designated Use Primary Body Contact Recreation	Turbidity	Designated Use Warm Water Aquatic Community	Designated Use Cool Water Aquatic Community
OK220100010010_00	Poteau River	23.89	2030	3	X		N	X*	N	
OK220100010010_10	Poteau River	1.55	2033	4	X		N		F	
OK220100020010_10	Poteau River	27.04	2030	3	X	X	N		N	
OK220200050010_00	Lee Creek	1.87	2030	3	X		N			N
OK220600010100_20	Mill Creek	24.16	2027	2			F	X	N	
OK220600030010_00	Brushy Creek	2.96	2027	2	X*		N	X	N	
OK220600040030_00	Beaver Creek	9.11	2024	1		X*	N	X	N	
OK410210020150_00	Terrapin Creek	13.47	2024	1			F	X		N
OK410400010010_20	Red River	4.86	2033	4	X*		N	X	N	
OK410400020200_00	Caney Creek	11.67	2030	3	X*	X*	N	X	N	
OK410400080010_00	North Boggy Creek	27.84	2024	1			I	X	N	

ENT = Enterococci; F = Fully Supporting; N = Not attaining; X = Criterion exceeded; I = Insufficient information
 * = completed in another TMDL report

Source: 2022 Integrated Report, DEQ 2022

Table ES - 2 Summary of Indicator Bacterial Samples from Primary Body Contact Recreation Subcategory Season May 1 to September 30, 2000-2020

Waterbody ID	Waterbody Name	Indicator	Number of Samples	Geometric Mean Conc. (colonies/100 ml)	Assessment Results / Recommended Actions
OK220100010010_00	Poteau River	ENT	10	87	Impaired / TMDL
		EC	10	43	Geometric mean meets criterion / No TMDL
OK220100010010_10	Poteau River	ENT	0	NA	No available data / Delist from 303d and no TMDL
OK220100020010_10	Poteau River	ENT	25	367	Impaired / TMDL
		EC	25	185	Impaired / TMDL
OK220200050010_00	Lee Creek	ENT	0	NA	No available data / Delist from 303d list and no TMDL
OK220600010100_20	Mill Creek	EC	14	6	Geometric mean meets criterion / No TMDL
OK220600030010_00	Brushy Creek	ENT	11	57	Impaired & 2008 TMDL / No TMDL
		EC	11	100	Geometric mean meets criterion / No TMDL
OK220600040030_00	Beaver Creek	ENT	1	12	Insufficient data / No TMDL
		EC	2	15	Insufficient data / Delist from 303d list and no TMDL
OK410210020150_00	Terrapin Creek	ENT	10	24	Geometric mean meets criterion / No TMDL
		EC	11	28	Geometric mean meets criterion / No TMDL
OK410400010010_20	Red River	ENT	10	197	Impaired & 2007 TMDL / No TMDL
		EC	10	16	Geometric mean meets criterion / No TMDL
OK410400020200_00	Caney Creek	ENT	10	210	Impaired & 2015 TMDL / No TMDL
		EC	10	182	Impaired & 2015 TMDL / No TMDL
OK410400080010_00	North Boggy Creek	EC	9	72	Geometric mean meets criterion / No TMDL

Enterococci (ENT) water quality criterion = Geometric Mean of 33 colonies/100 mL;

E. coli (EC) water quality criterion = Geometric Mean of 126 colonies/100 mL

TMDLs will be developed for waterbodies highlighted in green

Table ES - 3 Summary of Turbidity Data Excluding High Flow Samples, 2000-2021

Waterbody ID	Waterbody Name	WQM Stations	Number of Turbidity Samples	Number of Samples Greater than 50 NTU	% Samples Exceeding Criterion	Average Turbidity (NTU)	Assessment Results / Recommended Actions
OK220100010010_00	Poteau River	220100010010-001AT	19	5	26%	36.6	Impaired & 2013 TMDL / No TMDL
OK220600010100_20	Mill Creek	OK220600-01-0100J	11	2	18%	31.8	Impaired / TMDL
OK220600030010_00	Brushy Creek	220600030010-001AT	24	3	13%	30.3	Impaired / TMDL
OK220600040030_00	Beaver Creek	OK220600-04-0030G	11	3	27%	38.5	Impaired / TMDL
OK410210020150_00	Terrapin Creek	OK410210-02-0150G	15	3	20%	8.0	Impaired / TMDL
OK410400010010_20	Red River	410400010010-001AT	19	3	16%	30.7	Impaired / TMDL
OK410400020200_00	Caney Creek	OK410400-02-0200G	15	3	20%	35.3	Impaired / TMDL
OK410400080010_00	North Boggy Creek	OK410400-08-0010E	11	4	36%	44.4	Impaired / TMDL

TMDLs will be developed for waterbodies highlighted in tan.

Table ES - 4 Summary of TSS Data Excluding High Flow Samples, 1998-2021

Waterbody ID	Waterbody Name	WQM Stations	Number of TSS Samples	Average TSS (mg/L)
OK220600010100_20	Mill Creek	OK220600-01-0100J	9	15.6
OK220600030010_00	Brushy Creek	220600030010-001AT	0	
OK220600040030_00	Beaver Creek	OK220600-04-0030G	11	29.0
OK410210020150_00	Terrapin Creek	OK410210-02-0150G	13	5.0
OK410400010010_20	Red River	410400010010-001AT	16	38.3
OK410400020200_00	Caney Creek	OK410400-02-0200G	14	15.4
OK410400080010_00	North Boggy Creek	OK410400-08-0010E	10	14.0

Table ES - 5 Regression Statistics and TSS Goals

Waterbody ID	Waterbody Name	R-square	NRMSE	TSS Goal (mg/L) ^a	MOS ^b
OK220600010100_20	Mill Creek	0.47	19.4%	13	20%
OK220600030010_00	Brushy Creek	0.65	14.8%	34	15%
^c OK220600030010_10	Brushy Creek	0.47	19.4%	13	20%
OK220600040030_00	Beaver Creek	0.87	9.3%	49	10%
OK410210020150_00	Terrapin Creek	0.74	12.0%	6	15%
^d OK410210020300_00	Cloudy Creek	0.74	12.0%	6	15%
OK410400010010_20	Red River	0.82	7.0%	54	10%
OK410400020200_00	Caney Creek	0.66	24.3%	22	25%
^e OK410400030490_00	Goose Creek	0.66	24.3%	22	25%
OK410400080010_00	North Boggy Creek	0.47	19.4%	13	20%

^a Calculated using the regression equation and the turbidity standard (50 NTU for WWAC and 10 NTU for CWAC)

^b Based on the goodness-of-fit of the turbidity-TSS regression (NRMSE)

^c Stream not included in this TMDL report, it is shown here for reference.

^d Stream not included in this TMDL report, it is shown here for reference. See "2014 Bacterial and Turbidity Total Maximum Daily Loads for the Oklahoma Lower Red River – Little River Basin Study Area".

^e Streams not included in this TMDL report, it is shown here for reference. See "2012 Bacterial and Turbidity Total Maximum Daily Loads for the Muddy Boggy Creek Area, Oklahoma".

ES-2.5 Chapter 740: Minimum Number of Samples

Chapter 740, *Implementation of Oklahoma's Water Quality Standards* (DEQ 2022). The excerpt below from Chapter 740 (OAC 252:740-15-3(d)), stipulates the minimum number of samples to assess beneficial use.

252:740-15-3. Data requirements

(d). Minimum number of samples.

(1) Except when (f) of this Section applies, or unless otherwise noted in subchapter 252:740-15 for a particular parameter, a minimum number of samples shall be required to assess beneficial use support.

(a) For streams and rivers, a minimum of 10 samples shall be required.

(b) For lakes greater than 250 surface acres, a minimum of 20 samples shall be required.

(c) For lakes 250 surface acres or smaller, a minimum of 10 samples shall be required. 25

- (d) For toxicants for the protection of the Fish and Wildlife Propagation and Public and Private Water beneficial uses, a minimum of 5 samples shall be required.
- (2) In order to satisfy the minimum sample requirements of this subsection, samples may be aggregated consistent with the spatial and temporal requirements prescribed in (b), (c), and (d) of this Section.
- (3) The prescribed minimum samples shall not be necessary if the available samples already assure exceedance of the applicable percentage for beneficial use assessment.
- (4) If a mathematical calculation including, but not limited to, a mean, median, or quartile, is required for assessment, a minimum of ten samples shall be required, regardless of the parameter type.
- (5) Additional samples for the calculation of temperature, pH and hardness dependent acute and chronic criteria shall be collected as required by OAC 252:740-5-8.

Table ES - 6 shows the bacterial and turbidity TMDLs that will be developed in this report.

Table ES - 6 Stream and Pollutants for TMDL Development

Waterbody ID	HUC 8 Codes	Waterbody Name	Stream Miles	TMDL Date	Priority	ENT	E. coli	Turbidity
OK220100010010_00	11110105	Poteau River	23.89	2030	3	X		
OK220100020010_10	11110105	Poteau River	27.04	2030	3	X	X	
OK220600010100_20	11090204	Mill Creek	24.16	2027	2			X
OK220600030010_00	11090204	Brushy Creek	2.96	2027	2			X
OK220600040030_00	11090204	Beaver Creek	9.11	2024	1			X
OK410210020150_00	11140107	Terrapin Creek	13.47	2024	1			X
OK410400010010_20	11140101	Red River	4.86	2033	4			X
OK410400020200_00	11140104	Caney Creek	11.67	2030	3			X
OK410400080010_00	11140103	North Boggy Creek	27.84	2024	1			X

ES - 3 Pollutant Source Assessment

A pollutant source assessment characterizes known and suspected sources of pollutant loading to impaired waterbodies. Sources within a watershed are categorized and quantified to the extent that information is available. Bacteria originate from warm-blooded animals and sources may be point or nonpoint in nature. Turbidity may originate from OPDES-permitted facilities, fields, construction sites, quarries, stormwater runoff and eroding stream banks.

Point sources are permitted through the OPDES program. OPDES-permitted facilities that discharge treated sanitary wastewater are required to monitor fecal coliform under the current permits and will be required to monitor *E. coli* when their permits come to renew. These facilities are also required to monitor TSS in accordance with their permits. There are eighteen active permitted municipal or industrial point source facilities within the Study Area.

Nonpoint sources include those sources that cannot be identified as entering a waterbody at a specific location. Nonpoint sources may emanate from land activities that contribute bacteria or TSS to surface water as a result of rainfall runoff. For the TMDLs in this report, all sources of pollutant loading not regulated by OPDES permits are considered nonpoint sources

Sediment loading of streams can originate from natural erosion processes, including the weathering of soil, rocks, and uncultivated land; geological abrasion; and other natural phenomena. There is insufficient data available to quantify contributions of TSS from these natural processes. TSS or sediment loading can also occur under non-runoff conditions as a result of anthropogenic activities in riparian corridors which cause erosive conditions. Given the lack of data to establish the background conditions for TSS/turbidity, separating background loading from nonpoint sources whether it is from natural or anthropogenic processes is not feasible in this TMDL development.

Table ES - 7 summarizes the point and nonpoint sources that contribute bacteria or TSS to each respective waterbody.

ES - 4 Using Load Duration Curves to Develop TMDLs

The TMDL calculations presented in this report are derived from load duration curves (LDC). LDCs facilitate rapid development of TMDLs, and as a TMDL development tool can provide some information for identifying whether impairments are associated with point or nonpoint sources. The LDC is a simple and efficient method to show the relationship between flow and pollutant load. LDCs graphically display the changing water quality over changing flows that may not be apparent when visualizing raw data. The LDC has additional valuable uses in the post-TMDL implementation phase of the restoration of the water quality for a waterbody. Plotting future monitoring information on the LDC can show trends of improvement to sources that will identify areas for revision to the watershed restoration plan. The low cost of the LDC method allows accelerated development of TMDL plans on more waterbodies and the evaluation of the implementation of WLAs and BMPs. The technical approach for using LDCs for TMDL development includes the following steps:

1. Prepare flow duration curves for gaged and ungaged WQM stations.
2. Estimate existing loading in the waterbody using ambient bacterial water quality data.
3. Estimate loading in the waterbody using measured TSS water quality data and turbidity-converted data.
4. Use LDCs to identify the critical condition that will dictate loading reductions and the overall percent reduction goal (PRG) necessary to attain WQS.

Use of the LDC obviates the need to determine a design storm or selected flow recurrence interval with which to characterize the appropriate flow level for the assessment of critical conditions. For waterbodies impacted by both point and nonpoint sources, the “nonpoint source critical condition” would typically occur during high flows, when rainfall runoff would contribute the bulk of the pollutant load, while the “point source critical condition” would typically occur during low flows, when wastewater treatment facilities (WWTF) effluents would dominate the base flow of the impaired water. However, flow range is only a general indicator of the relative proportion of point/nonpoint contributions. Violations have been noted under low flow conditions in some watersheds that contain no point sources.

Table ES - 7 Summary of Potential Pollutant Sources by Category

Waterbody ID	Waterbody Name	Municipal OPDES Facility	Industrial OPDES Facility	MS4	OPDES No Discharge Facility	CAFOs	PFOs	Construction Stormwater Permit	Multi-Sector General Permit	Nonpoint Source
OK220100010010_00	Poteau River	O	Ø	O		Ø	Ø	Ø	Ø	Bacteria
OK220100020010_10	Poteau River	O	Ø			Ø	Ø	Ø	Ø	Bacteria
OK220600010100_20	Mill Creek							Ø	Ø	Turbidity
OK220600030010_00	Brushy Creek	Ø						Ø	Ø	Turbidity
OK220600040030_00	Beaver Creek									Turbidity
OK410210020150_00	Terrapin Creek									Turbidity
OK410400010010_20	Red River	Ø							Ø	Turbidity
OK410400020200_00	Caney Creek									Turbidity
OK410400080010_00	North Boggy Creek							Ø		Turbidity
O : Facility present in watershed with assigned WLA										
Ø : Facility present in watershed, but not recognized as pollutant source										
No facility present in watershed										

LDCs display the maximum allowable load over the complete range of flow conditions by a line using the calculation of flow multiplied by a water quality criterion. The TMDL can be expressed as a continuous function of flow, equal to the line, or as a discrete value derived from a specific flow condition.

The following are the basic steps in developing a LDC:

1. Obtain daily flow data for the site of interest from the U.S. Geological Survey (USGS), or if unavailable, obtain projected flow from a nearby USGS site.
2. Sort the flow data and calculate the flow exceedance percentiles.
3. Obtain the water quality data.
4. For bacterial TMDLs, obtain the water quality data from the primary contact recreation season (May 1 through September 30).
5. For turbidity TMDLs, obtain available turbidity and TSS water quality data.
6. Match the water quality observations with the flow data from the same date
7. Display a curve on a plot that represents the allowable load determined by multiplying the actual or estimated flow by the WQS for each respective bacterial indicator.
8. Display a curve on a plot that represents the allowable load determined by multiplying the actual or estimated flow by the WQ_{goal} for TSS.
9. For bacterial TMDLs, display and differentiate another curve derived by plotting the geometric mean of all existing bacterial samples continuously along the full spectrum of flow exceedance percentiles which represents the observed load in the stream.
10. For turbidity TMDLs, match the water quality observations with the flow data from the same date and determine the corresponding exceedance percentile. Plot the flow exceedance percentiles and daily load observations in a load duration plot (Section 5).

ES-4.1 Bacterial LDC

For bacterial TMDLs, the culmination of these steps is expressed in the following formula, which is displayed on the LDC as the TMDL curve:

$$TMDL \text{ (colonies/day)} = WQS * \text{flow (cfs)} * \text{unit conversion factor}$$

Where:

$WQS = 126 \text{ colonies/100 mL (E. coli); or } 33 \text{ colonies/100 mL (Enterococci)}$

$\text{Unit conversion factor} = 24,465,525$

ES-4.2 TSS LDC

For turbidity (TSS) TMDLs, the culmination of these steps is expressed in the following formula, which is displayed on the LDC as the TMDL curve:

$$TMDL \text{ (lb/day)} = WQ_{goal} * \text{flow (cfs)} * \text{unit conversion factor}$$

Where:

WQ_{goal} = *waterbody specific TSS concentration derived from regression analysis results*

Unit conversion factor = 5.39377

ES-4.3 LDC Summary

The LDC approach recognizes that the assimilative capacity of a waterbody depends on the flow, and that maximum allowable loading varies with flow condition. Existing loading and load reductions required to meet the TMDL water quality target can also be calculated under different flow conditions. The difference between existing loading and the water quality target is used to calculate the loading reductions required.

Historical observations of bacteria were plotted as a separate LDC based on the geometric mean of all samples. It is noted that the LDCs for bacteria were based on the geometric mean standards or geometric mean of all samples. It is inappropriate to compare single sample bacterial observations to a geometric mean water quality criterion in the LDC; therefore individual bacterial samples are not plotted on the LDCs.

Historical observations of TSS and/or turbidity concentrations are paired with flow data and are plotted on the LDC for a stream.

ES - 5 TMDL Calculations

A TMDL is expressed as the sum of all WLAs (point source loads), LAs (nonpoint source loads), and an appropriate MOS, which attempts to account for the lack of knowledge concerning the relationship between pollutant loading and water quality. A TMDL is expressed as the sum of three elements (WLA, LA, and MOS) as described in the following mathematical equation:

$$TMDL = WLA_{WWTF} + WLA_{MS4} + WLA_{Growth} + LA + MOS$$

The WLA is the portion of the TMDL allocated to existing and future point sources. The LA is the portion of the TMDL allocated to nonpoint sources, including natural background sources. The MOS is intended to ensure that WQs will be met.

ES-5.1 Bacterial PRG

For each waterbody the TMDLs presented in this report are expressed as colonies per day across the full range of flow conditions. For information purpose, percent reductions are also provided. The difference between existing loading and the water quality target is used to calculate the loading

reductions required. For bacteria, the PRG is calculated by reducing all samples by the same percentage until the geometric mean of the reduced sample values meets the corresponding bacterial geometric mean standard (126 colonies/100 ml for *E. coli* and 33 colonies/100 ml for Enterococci) with 10% of MOS. For turbidity, the PRG is the load reduction that ensures that no more than 10% of the samples under base-flow conditions exceed the TMDL.

Table ES - 8 presents the percent reductions necessary for each bacterial indicator causing nonsupport of the PBCR use in each waterbody of the Study Area.

Table ES - 8 Percent Reductions Required to Meet Water Quality Standards for Indicator Bacteria

Waterbody ID	Waterbody Name	Required Reduction Rate	
		EC	ENT
OK220100010010_00	Poteau River	-	65.8%
OK220100020010_10	Poteau River	38.8%	91.9%

ES-5.2 TSS PRG

PRGs for TSS are calculated as the required overall reduction so that no more than 10% of the samples exceed the water quality target for TSS. The PRGs for the waterbodies requiring turbidity TMDLs in this report are summarized in **Table ES - 9**.

Table ES - 9 TMDL Percent Reductions Required to Meet Water Quality Targets for Total Suspended Solids

Waterbody ID	Waterbody Name	Required Reduction Rate
OK220600010100_20	Mill Creek	80.1%
OK220600030010_00	Brushy Creek	40.2%
OK220600040030_00	Beaver Creek	15.2%
OK410210020150_00	Terrapin Creek	49.1%
OK410400010010_20	Red River	18.3%
OK410400020200_00	Caney Creek	55.5%
OK410400080010_00	North Boggy Creek	52.8%

ES-5.3 Seasonal Variation

The TMDL, WLA, LA, and MOS vary with flow condition, and are calculated at every 5th flow interval percentile. The WLA component of each TMDL is the sum of all WLAs within each contributing watershed. The LA can then be calculated as follows:

$$LA = TMDL - MOS - \sum WLA$$

Federal regulations (40 CFR § Part 130.7(c)(1)) require that TMDLs account for seasonal variation in watershed conditions and pollutant loading.

The bacterial TMDLs established in this report adhere to the seasonal application of the Oklahoma WQS which limits the PBCR use to the period of May 1st through September 30th.

The TSS TMDLs established in this report adhere to the seasonal application of the Oklahoma WQS for turbidity, which applies to seasonal base flow conditions only. Seasonal variation was also accounted for in these TMDLs by using more than five years of water quality data and by using the longest period of USGS flow records when estimating flows to develop flow exceedance percentiles.

ES-5.4 MOS

Federal regulations (40 CFR § Part 130.7(c)(1)) also require that TMDLs include an MOS. The MOS, which can be implicit or explicit, is a conservative measure incorporated into the TMDL equation that accounts for the lack of knowledge associated with calculating the allowable pollutant loading to ensure WQSs are attained.

For bacterial TMDLs, an explicit MOS was set at 10%.

For turbidity, the TMDLs are calculated for TSS instead of turbidity. Thus, the quality of the regression has a direct impact on confidence of the TMDL calculations. The better the regression is, the more confidence there is in the TMDL targets. As a result, it leads to a smaller MOS. The selection of MOS is based on the normalized root mean square error (NRMSE) for each waterbody (see **Table ES - 5**).

The TMDL represents a continuum of desired load over all flow conditions, rather than fixed at a single value, because loading capacity varies as a function of the flow present in the stream. The higher the flow is, the more wasteload the stream can handle without violating water quality standards. Regardless of the magnitude of the WLA calculated in these TMDLs, future new discharges or increased load from existing discharges will be considered consistent with the TMDL provided the OPDES permit requires in-stream criteria to be met.

ES - 6 Reasonable Assurance

Reasonable assurance is required by the EPA rules for a TMDL to be approvable only when a waterbody is impaired by both point and nonpoint sources and where a point source is given a less stringent WLA based on an assumption that nonpoint source load reductions will occur. In such a case, “reasonable assurances” that nonpoint (NPS) load reductions will actually occur must be demonstrated.

In this report, all point source discharges either already have or will be given discharge limitations less than or equal to the water quality standard numerical criteria. This ensures that the impairments of the waterbodies in this report will not be caused by point sources.

Reasonable assurance of nonpoint sources will meet their allocated amount in the TMDL which is dependent upon the availability and implementation of nonpoint source pollutant reduction plans, controls or BMPs within the watershed. The OCC has responsibilities for the state's NPS program defined in Section 319 of CWA. DEQ will work in conjunction with OCC and other federal, state, and local partners to meet the load reduction goals for NPS. All waterbodies are prioritized as part of the Unified Watershed Assessment (UWA) and that ranking will determine the likelihood of an implementation project in a watershed.

ES - 7 Public Participation

A public notice about the draft TMDL report will be sent to local newspapers, government agencies, stakeholders in the Study Area affected by these draft TMDLs, and stakeholders who have requested copies of all TMDL public notices. The public notice (which includes the draft 208 TMDL factsheet) and draft TMDL report will be posted at the following DEQ website: www.deq.ok.gov/water-quality-division/watershed-planning/tmdl/. The public will have an opportunity to review the draft TMDL report and make written comments.

The public comment period lasts 45 days. Depending on the interest and responses from the public, a public meeting may be held within the watershed affected by the TMDLs in this report. If a public meeting is held, the public will also have opportunities to ask questions and make formal oral comments at the meeting and/or submit written comments at the public meeting.

All written comments received during the public notice period become a part of the record of these TMDLs. All comments will be considered and the TMDL report will be revised according to the comments, if necessary, prior to the ultimate completion of these TMDLs for submission to EPA for final approval.

SECTION 1 INTRODUCTION

1.1 TMDL Program Background

As promulgated by Section 402 (aka Section 1342) of the Clean Water Act (CWA) and 40 CFR § Part 123, the U.S. Environmental Protection Agency (EPA) has [delegated authority](#) to the Oklahoma Department of Environmental Quality (DEQ) to partially oversee the [National Pollutant Discharge Elimination System \(NPDES\) Program](#) in the State of Oklahoma. Exceptions are agriculture (retained by State Department of Agriculture, Food, and Forestry), and the oil & gas industry (retained by the Oklahoma Corporation Commission) for which EPA has retained permitting authority. The NPDES Program in Oklahoma, in accordance with an agreement between DEQ and EPA, is implemented via the Oklahoma Pollutant Discharge Elimination System (OPDES) Act [Title 252, Chapter 606 (<https://www.deq.ok.gov/wp-content/uploads/deqmainresources/606.pdf>)].

Section 303(d) [aka Section 1313(d)] of the CWA and EPA Water Quality Planning and Management Regulations [40 Code of Federal Regulations (CFR) § Part 130] require states to develop total maximum daily loads (TMDL) for all waterbodies and pollutants identified by the Regional Administrator as suitable for TMDL calculation. Waterbodies and pollutants identified on the approved 303(d) list as not meeting designated uses where technology-based controls are in place will be given a higher priority for development of TMDLs. TMDLs establish the allowable loadings of pollutants or other quantifiable parameters for a waterbody based on the relationship between pollution sources and in-stream water quality conditions, so states can implement water quality-based controls to reduce pollution from point and nonpoint sources and restore and maintain water quality (EPA 1991).

This report documents the data and assessment used to establish TMDLs for the pathogen indicator bacteria [*Escherichia coli* (*E. coli*) and Enterococci]¹ and turbidity for selected waterbodies in the Southeast Oklahoma area. Elevated levels of pathogen indicator bacteria in aquatic environments indicate that a waterbody is contaminated with human or animal feces and that a potential health risk exists for individuals exposed to the water. Elevated turbidity levels caused by excessive sediment loading and stream bank erosion impact aquatic biological communities.

Data assessment and TMDL calculations are conducted in accordance with requirements of Section 303(d) of the CWA, Water Quality Planning and Management Regulations (40 CFR § Part 130), EPA guidance, and Oklahoma Department of Environmental Quality (DEQ) guidance and procedures. DEQ is required to submit all TMDLs to EPA for review. Approved 303(d) listed waterbody-pollutant pairs or surrogates TMDLs will receive notification of the approval or disapproval action. Once the EPA approves a TMDL, then the waterbody may be moved to Category 4a of a state's Integrated Water Quality

¹ All future references to bacteria in this document imply these two fecal pathogen indicator bacterial groups unless specifically stated otherwise

Monitoring and Assessment Report, where it remains until compliance with water quality standards (WQS) is achieved (EPA 2003).

These TMDLs provide a load reduction to meet ambient water quality criterion with a given set of facts. The adoption of these TMDLs into the Water Quality Management Plan (WQMP) provides a mechanism to recalculate acceptable pollutant loads when information changes in the future. Updates to the WQMP demonstrate compliance with the water quality criterion. The updates to the WQMP are also useful when the water quality criterion changes and loading scenarios are reviewed to ensure that the predicted in-stream criterion will be met.

The purpose of this TMDL study was to establish pollutant load allocations for indicator bacteria and turbidity in impaired waterbodies, which is the first step toward restoring water quality and protecting public health. TMDLs determine the pollutant loading a waterbody can assimilate without exceeding the WQS for that pollutant. TMDLs also establish the pollutant load allocation necessary to meet the WQS established for a waterbody based on the relationship between pollutant sources and in-stream water quality conditions. A TMDL consists of a wasteload allocation (WLA), load allocation (LA), and a margin of safety (MOS). The WLA is the fraction of the total pollutant load apportioned to point sources and includes stormwater discharges regulated under OPDES. The LA is the fraction of the total pollutant load apportioned to nonpoint sources. MOS can be implicit and/or explicit. An implicit MOS is achieved by using conservative assumptions in the TMDL calculations. An explicit MOS is a percentage of the TMDL set aside to account for the lack of knowledge associated with natural process in aquatic systems, model assumptions, and data limitations.

This report does not stipulate specific control actions (regulatory controls) or management measures (voluntary best management practices) necessary to reduce bacteria or turbidity within each watershed. Watershed-specific control actions and management measures will be identified, selected, and implemented under a separate process involving stakeholders who live and work in the watersheds, along with tribes, and local, state, and federal government agencies.

This TMDL report focuses on waterbodies that DEQ placed in Category 5 [303(d) list] of the [Water Quality in Oklahoma, 2022 Integrated Report](#) for nonsupport of primary body contact recreation (PBCR) or Fish & Wildlife Propagation beneficial uses. The waterbodies considered for TMDL development in this report are listed in **Table 1-1**:

Table 1-1 TMDL Waterbodies

Waterbody Name	Waterbody ID
Poteau River	OK220100010010_00
Poteau River	OK220100010010_10
Poteau River	OK220100020010_10
Lee Creek	OK220200050010_00

Waterbody Name	Waterbody ID
Mill Creek	OK220600010100_20
Brushy Creek	OK220600030010_00
Beaver Creek	OK220600040030_00
Terrapin Creek	OK410210020150_00
Red River	OK410400010010_20
Caney Creek	OK410400020200_00
North Boggy Creek	OK410400080010_00

Figure 1-1 shows these Oklahoma waterbodies and their contributing watersheds. These maps also display locations of the water quality monitoring (WQM) stations used as the basis for placement of these waterbodies on the Oklahoma 303(d) list. These waterbodies and their surrounding watersheds are hereinafter referred to as the Study Area.

TMDLs are required to be developed whenever elevated levels of pathogen indicator bacteria or turbidity are above the WQS numeric criterion. The TMDLs established in this report are a necessary step in the process to develop the pollutant loading controls needed to restore the PBCR or Fish & Wildlife Propagation use designated for each waterbody.


Table 1-2 provides a description of the locations of WQM stations on the 303(d)-listed waterbodies.

Table 1-2 Water Quality Monitoring Stations used for Assessment of Streams

WQM Station	Waterbody Name	Station Location	Waterbody ID
220100010010-001AT	Poteau River	Lat.: 35.24; Long.: -94.52	OK220100010010_00
NA	Poteau River	NA	OK220100010010_10
USGS07247015; USGS07247350	Poteau River	Lat.: 34.88; Long.: -94.48 Lat.: 34.86; Long.: -94.63	OK220100020010_10
NA	Lee Creek	NA	OK220200050010_00
OK220600-01-0100J	Mill Creek	Lat.: 35.22; Long.: -95.80	OK220600010100_20
220600030010-001AT	Brushy Creek	Lat.: 34.87; Long.: -95.59	OK220600030010_00
OK220600-04-0030G	Beaver Creek	Lat.: 34.91; Long.: -95.44	OK220600040030_00
OK410210-02-0150G	Terrapin Creek	Lat.: 34.26; Long.: -95.10	OK410210020150_00
410400010010-001AT	Red River	Lat.: 33.88; Long.: -95.50	OK410400010010_20
OK410400-02-0200G	Caney Creek	Lat.: 34.19; Long.: -96.06	OK410400020200_00
OK410400-08-0010E	North Boggy Creek	Lat.: 34.61; Long.: -96.02	OK410400080010_00

NA: Not applicable.

Figure 1-1 Watersheds Not Supporting Primary Body Contact Recreation or Fish & Wildlife Propagation Beneficial Uses in Southeast Oklahoma Study Area

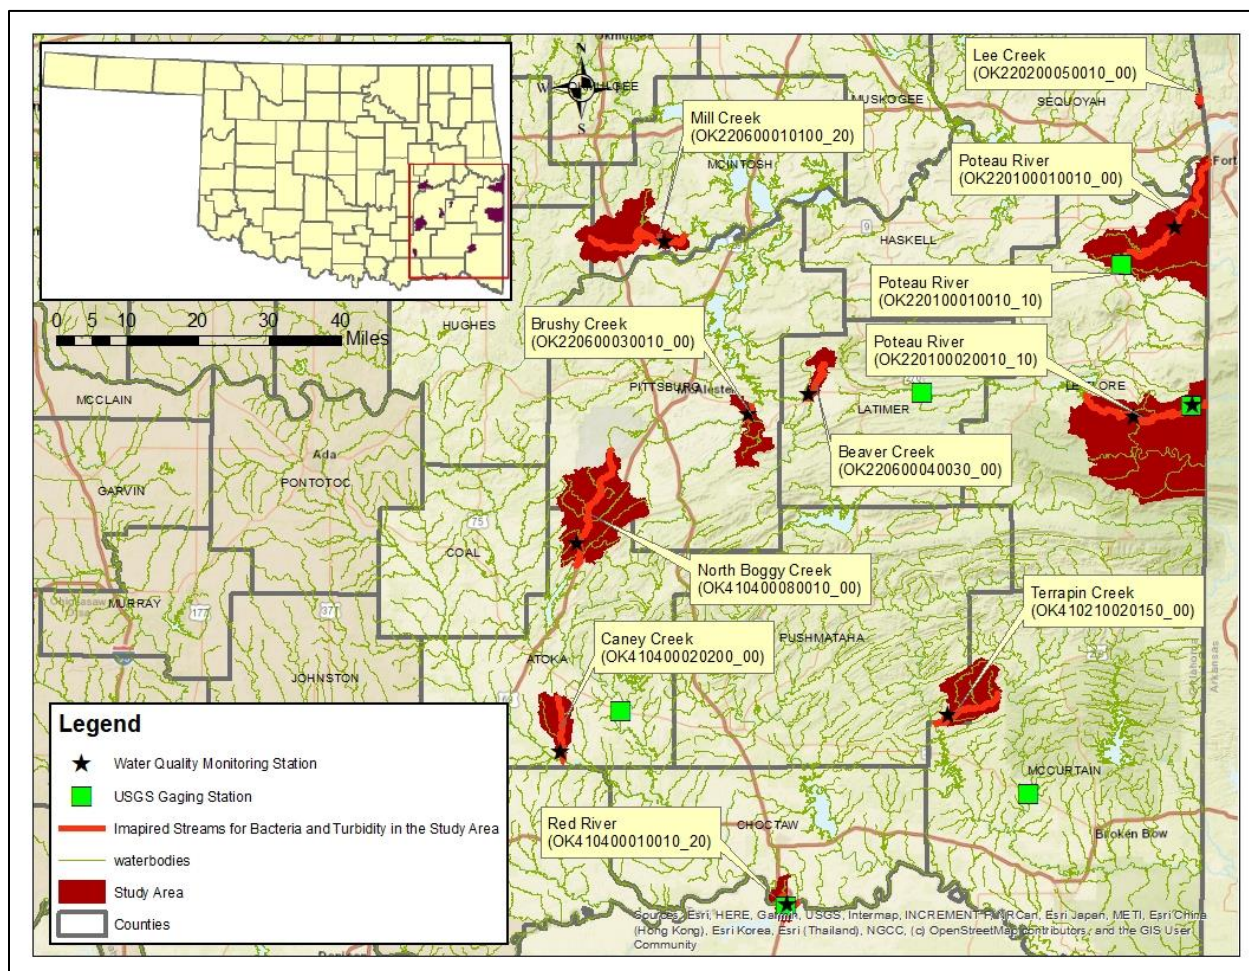

1.2 Watershed Description

1.2.1 General

The Southeast Oklahoma Study Area is located in the southeastern part of Oklahoma. The waterbodies and their watersheds addressed in this report are scattered over Atoka, Choctaw, Hughes, Latimer, LeFlore, McCurtain, McIntosh, Pittsburg, Pushmataha, and Sequoyah counties. These counties are part of the South Central Plains, Cross Timbers, Arkansas Valley, Ouachita Mountains, and Boston Mountains Level III ecoregions (Woods, A.J, et al 2005). The watersheds in the Study Area are located in the Arkoma Basin, Ozark Uplift, and Ouachita Mountain Uplift geomorphic geological provinces. **Table 1-3**, derived from the 2020 U.S. Census, demonstrates that the counties in which these watersheds are located are mostly sparsely populated (U.S. Census Bureau 2020).

Table 1-4 lists major towns and cities located in each watershed.

Table 1-3 County Population and Density

County Name	Population (2020 Census)	Population Density (per square mile)
Atoka	14,143	14
Choctaw	14,646	18
Hughes	13,367	16
Latimer	9,869	14
Le Flore	48,129	30
McCurtain	30,814	16
McIntosh	18,941	27
Pittsburg	43,773	32
Pushmataha	10,812	8
Sequoyah	39,281	55

Table 1-4 Major Municipalities by Watershed

Waterbody Name	Waterbody ID	Municipalities
Poteau River	OK220100010010_00	Cameron, Rock Island, Pocola, Arkoma, Fort Smith (AR), Spiro, Panama
Poteau River	OK220100010010_10	Panama
Poteau River	OK220100020010_10	Heavener, Hodgen
Lee Creek	OK220200050010_00	
Mill Creek	OK220600010100_20	Hanna
Brushy Creek	OK220600030010_00	Pittsburg, Blanco, Savanna, Haileyville, Hartshorne
Beaver Creek	OK220600040030_00	
Terrapin Creek	OK410210020150_00	
Red River	OK410400010010_20	Grant
Caney Creek	OK410400020200_00	
North Boggy Creek	OK410400080010_00	Wardville, Kiowa

1.2.2 Climate

Table 1-5 summarizes the average annual precipitation at Mesonet Stations near each Oklahoma waterbody derived from current and past 15 years daily data. Average annual precipitation values among the watersheds in this portion of Oklahoma range between 44.67 and 52.67 inches (Mesonet 2021).

Table 1-5 Average Annual Precipitation by Watershed

Waterbody Name	Waterbody ID	Mesonet Station	Average Annual Precipitation (inches)
Poteau River	OK220100010010_00	Wister	51.82
Poteau River	OK220100010010_10	Wister	51.82
Poteau River	OK220100020010_10	Wister	51.82
Lee Creek	OK220200050010_00	Sallisaw	49.94
Mill Creek	OK220600010100_20	Eufaula	48.66
Brushy Creek	OK220600030010_00	McAlester	48.73
Beaver Creek	OK220600040030_00	Wilburton	49.70
Terrapin Creek	OK410210020150_00	Cloudy	52.67
Red River	OK410400010010_20	Hugo	49.41
Caney Creek	OK410400020200_00	Lane	44.67
North Boggy Creek	OK410400080010_00	McAlester	48.73

1.2.3 Land Use

Table 1-6 summarizes the percentages and acreages of the land use categories for the contributing watershed associated with each respective Oklahoma waterbody addressed in the Study Area. The land use/land cover data were derived from the U.S. Geological Survey (USGS) National Land Cover Dataset (USGS 2019). The percentages provided in **Table 1-6** are rounded so in some cases may not total exactly 100%. The land use categories are displayed in **Figure 1-2**. The three most dominant land use categories throughout the Southeast Oklahoma Study Area are deciduous forest, evergreen forest and pasture/hay. The Poteau River (OK220100020010_10) and Terrapin Creek (OK410210020150_00) watersheds in the Study Area have a significant percentage of land use classified as evergreen forest. Terrapin Creek watershed also has a significant percentage of the land use classified as shrub/scrub and grassland/herbaceous (rangeland), which is different than the other watersheds in the Study Area. The Beaver Creek (OK220600040030_00) watershed in the Study Area is dominated by mixed forests instead of deciduous forests. The Red River (OK410400010010_20) watershed's second highest percentage of land use is classified as cultivated crops, whereas in other watersheds there was little to no acreage of cultivated crops in the Study Area, except the Poteau River (OK220100010010_00). The watersheds targeted for TMDL development in this Study Area range in size from 1,108 acres (Lee Creek, OK220200050010_00) to 151,364 acres (Poteau River, OK220100020010_10).

1.3 Stream Flow Conditions

Stream flow characteristics and data are key information when conducting water quality assessments such as TMDLs. The USGS operates flow gages throughout Oklahoma, from which long-term stream flow records can be obtained (USGS 2016). Not all of the

waterbodies in this Study Area have historical flow data available. At various WQM stations additional flow measurements are available which were collected at the same time bacteria, total suspended solids (TSS) and turbidity water quality samples were collected. Flow data from the surrounding USGS gage stations and the instantaneous flow measurement data taken with water quality samples have been used to estimate flows for ungaged streams. Flow conditions recorded during the time of water quality sampling for turbidity are included in Appendix A along with corresponding water chemistry data results. A summary of the method used to project flows for ungaged streams and flow exceedance percentiles from projected flow data are provided in **Appendix Table C-1**.

Figure 1-2 Land Use Map

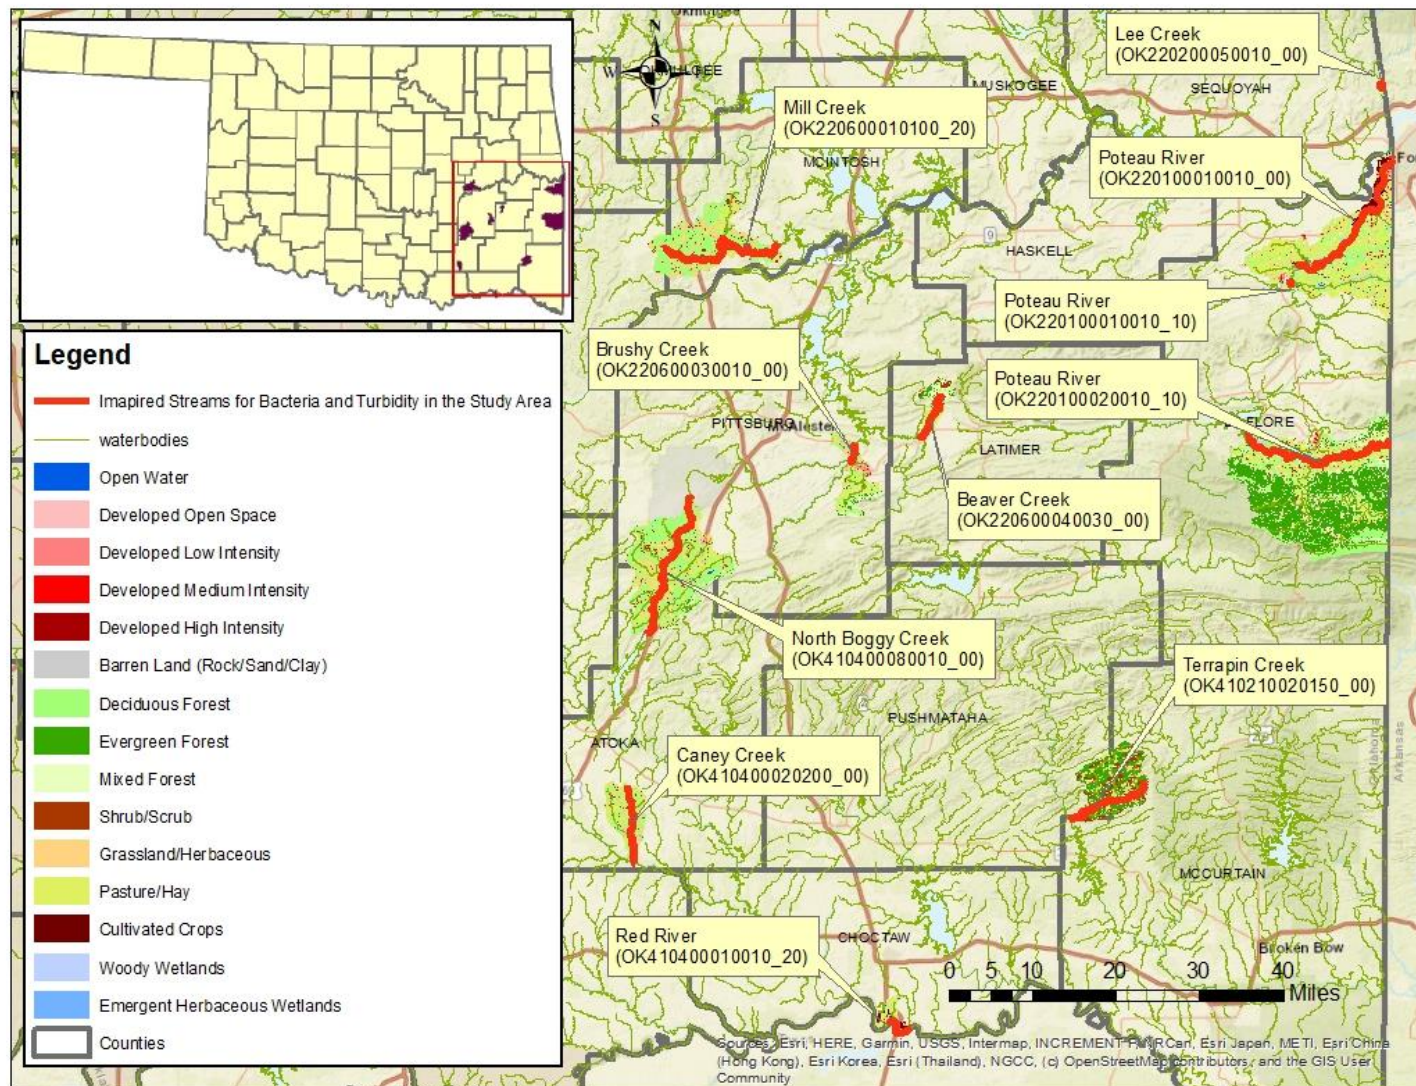


Table 1-6 Land Use Summaries by Watershed

Landuse Category	Watershed					
	Poteau River	Poteau River	Poteau River	Lee Creek	Mill Creek	Brushy Creek
Waterbody ID	OK220100010010_00	OK220100010010_10	OK220100020010_10	OK220200050010_00	OK220600010100_20	OK220600030010_00
Open Water	1,283	43	1,295	44	151	204
Developed, Open Space	3,537	136	3,598	0	825	1,084
Developed, Low Intensity	1,877	202	842	0	308	632
Developed, Medium Intensity	843	45	356	0	201	217
Developed, High Intensity	290	7	86	0	21	100
Bare Rock/Sand/Clay	392	0	46	0	4	68
Deciduous Forest	18,965	146	28,703	575	28,776	6,298
Evergreen Forest	637	1	66,259	49	181	917
Mixed Forest	5,760	82	25,435	347	138	2,414
Shrub/Scrub	1,106	9	2,101	0	2,510	445
Grasslands/Herbaceous	2,893	12	2,048	4	9,291	1,800
Pasture/Hay	45,797	1,248	18,913	70	7,795	4,594
Cultivated Crops	4,757	0	0	0	19	0
Woody Wetlands	3,573	171	1,559	16	82	323
Emergent Herbaceous Wetlands	375	19	123	4	17	15
Total (Acres)	92,085	2,121	151,364	1,108	50,319	19,111
Open Water	1.4%	2.0%	0.9%	4.0%	0.3%	1.1%
Developed, Open Space	3.8%	6.4%	2.4%	0.0%	1.6%	5.7%
Developed, Low Intensity	2.0%	9.5%	0.6%	0.0%	0.6%	3.3%
Developed, Medium Intensity	0.9%	2.1%	0.2%	0.0%	0.4%	1.1%
Developed, High Intensity	0.3%	0.3%	0.1%	0.0%	0.0%	0.5%
Bare Rock/Sand/Clay	0.4%	0.0%	0.0%	0.0%	0.0%	0.4%
Deciduous Forest	20.6%	6.9%	19.0%	51.9%	57.2%	33.0%
Evergreen Forest	0.7%	0.1%	43.8%	4.4%	0.4%	4.8%
Mixed Forest	6.3%	3.9%	16.8%	31.3%	0.3%	12.6%
Shrub/Scrub	1.2%	0.4%	1.4%	0.0%	5.0%	2.3%
Grasslands/Herbaceous	3.1%	0.5%	1.4%	0.3%	18.5%	9.4%
Pasture/Hay	49.7%	58.8%	12.5%	6.3%	15.5%	24.0%
Cultivated Crops	5.2%	0.0%	0.0%	0.0%	0.0%	0.0%
Woody Wetlands	3.9%	8.0%	1.0%	1.4%	0.2%	1.7%
Emergent Herbaceous Wetlands	0.4%	0.9%	0.1%	0.4%	0.0%	0.1%
Total (%):	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%

Landuse Category	Watershed				
	Beaver Creek	Terrapin Creek	Red River	Caney Creek	North Boggy Creek
Waterbody ID	OK220600040030_00	OK410210020150_00	OK410400010010_20	OK410400020200_00	OK410400080010_00
Open Water	12	40	434	99	470
Developed, Open Space	212	1,173	114	533	1,622
Developed, Low Intensity	49	306	89	116	801
Developed, Medium Intensity	18	44	47	25	396
Developed, High Intensity	6	6	3	1	117
Bare Rock/Sand/Clay	8	0	38	3	14
Deciduous Forest	1,342	1,758	295	8,557	42,972
Evergreen Forest	1,101	18,255	2	14	995
Mixed Forest	3,040	2,944	61	33	2,113
Shrub/Scrub	1,154	6,709	160	959	3,087
Grasslands/Herbaceous	348	4,767	133	3,343	12,253
Pasture/Hay	2,701	96	2,771	5,898	12,290
Cultivated Crops	0	0	1,098	0	0
Woody Wetlands	239	27	189	436	407
Emergent Herbaceous Wetlands	3	12	31	145	55
Total (Acres)	10,232	36,136	5,464	20,160	77,592
Open Water	0.1%	0.1%	7.9%	0.5%	0.6%
Developed, Open Space	2.1%	3.2%	2.1%	2.6%	2.1%
Developed, Low Intensity	0.5%	0.8%	1.6%	0.6%	1.0%
Developed, Medium Intensity	0.2%	0.1%	0.9%	0.1%	0.5%
Developed, High Intensity	0.1%	0.0%	0.1%	0.0%	0.2%
Bare Rock/Sand/Clay	0.1%	0.0%	0.7%	0.0%	0.0%
Deciduous Forest	13.1%	4.9%	5.4%	42.4%	55.4%
Evergreen Forest	10.8%	50.5%	0.0%	0.1%	1.3%
Mixed Forest	29.7%	8.1%	1.1%	0.2%	2.7%
Shrub/Scrub	11.3%	18.6%	2.9%	4.8%	4.0%
Grasslands/Herbaceous	3.4%	13.2%	2.4%	16.6%	15.8%
Pasture/Hay	26.4%	0.3%	50.7%	29.3%	15.8%
Cultivated Crops	0.0%	0.0%	20.1%	0.0%	0.0%
Woody Wetlands	2.3%	0.1%	3.5%	2.2%	0.5%
Emergent Herbaceous Wetlands	0.0%	0.0%	0.6%	0.7%	0.1%
Total (%):	100.0%	100.0%	100.0%	100.0%	100.0%

SECTION 2 PROBLEM IDENTIFICATION AND WATER QUALITY TARGET

2.1 Oklahoma Water Quality Standards

Title 252 of the Oklahoma Administrative Code contains Oklahoma Water Quality Standards (OWQS) and implementation procedures (DEQ 2022). The Oklahoma Department of Environmental Quality (DEQ) has statutory authority and responsibility concerning establishment of State WQS, as provided under 82 Oklahoma Statute [O.S.], §1085.30. This statute authorizes the Oklahoma DEQ to promulgate rules ...*which establish classifications of uses of waters of the state, criteria to maintain and protect such classifications, and other standards or policies pertaining to the quality of such waters.* [O.S. 82:1085:30(A)]. Beneficial uses are designated for all waters of the State. Such uses are protected through restrictions imposed by the antidegradation policy statement, narrative water quality criteria, and numerical criteria (DEQ 2022). An excerpt of the Oklahoma WQS (Title 252) summarizing the State of Oklahoma Antidegradation Policy is provided in 5.9.2Appendix G. **Table 2-1**, an excerpt from the 2022 Integrated Report (DEQ 2022), lists beneficial uses designated for each impaired stream segment in the Study Area. The beneficial uses include:

- AES – Aesthetics
- AG – Agriculture Water Supply
- Fish and Wildlife Propagation
 - WWAC – Warm Water Aquatic Community
 - CWAC – Cold Water Aquatic Community
- FISH – Fish Consumption
- PBCR – Primary Body Contact Recreation
- PPWS – Public & Private Water Supply
- EWS – Emergency Water Supply
- SWS – Sensitive Public and Private Water Supplies
- HQW – High Quality Water

Table 2-1 Designated Beneficial Uses for Each Stream Segment in the Study Area

Waterbody ID	Waterbody Name	AES	AG	WWAC	CWAC	FISH	PBCR	PPWS	EWS	SWS	HQW
OK220100010010_00	Poteau River	F	F	N		F	N	I			
OK220100010010_10	Poteau River	F	F	F		F	N	I			
OK220100020010_10	Poteau River	F	F	N		F	N	I			
OK220200050010_00	Lee Creek	I	F		N	X	N	I			X
OK220600010100_20	Mill Creek	F	F	N		X	F	I			
OK220600030010_00	Brushy Creek	N	F	N		N	N	N			
OK220600040030_00	Beaver Creek	N	I	N		X	N				
OK410210020150_00	Terrapin Creek	F	F		N	X	F	I			X
OK410400010010_20	Red River	F	F	N		F	N	I			
OK410400020200_00	Caney Creek	N	F	N		X	N				
OK410400080010_00	Boggy Creek, North	F	F	N		X	I	I		X	
F – Fully supporting		N – Not supporting		I – Insufficient		X – Not assessed		Source: DEQ 2022 Integrated Report			

2.1.1 Chapter 730: Definition of PBCR and Bacterial WQSs

The definition of PBCR and the bacterial WQSs for PBCR are summarized by the following excerpt from Title 252, Chapter 730-5-16 of the Oklahoma WQSs (DEQ 2022).

- (a). *Primary Body Contact Recreation involves direct body contact with the water where a possibility of ingestion exists. In these cases the water shall not contain chemical, physical or biological substances in concentrations that are irritating to skin or sense organs or are toxic or cause illness upon ingestion by human beings.*
- (b). *In waters designated for Primary Body Contact Recreation...limits...shall apply only during the recreation period of May 1 to September 30. The criteria for Secondary Body Contact Recreation will apply during the remainder of the year.*
- (c). *Compliance with 252:730-5-16 shall be based upon meeting the requirements of one of the options specified in (1) or (2) of this subsection (c) for bacteria. Upon selection of one (1) group or test method, said method shall be used exclusively over the time period prescribed therefore. Provided, where concurrent data exist for multiple bacterial indicators on the same waterbody or waterbody segment, no criteria exceedances shall be allowed for any indicator group.*
 - (1) *Escherichia coli (E. coli): The E. coli geometric mean criterion is 126/100 ml. For swimming advisory and permitting purposes, E. coli shall not exceed a monthly geometric mean of 126/100 ml based upon a minimum of not less than five (5) samples collected over a period of not more than thirty (30) days. For swimming advisory and permitting purposes, no sample shall exceed a 75% one-sided confidence level of 235/100 ml in lakes and high use waterbodies and the 90% one-sided confidence level of 406/100 ml in all other Primary Body Contact Recreation beneficial use areas. These values are based upon all samples collected over the recreation period. For purposes of sections 303(d) and 305(b) of the federal Clean Water Act as amended, beneficial use support status shall be assessed using only the geometric mean criterion of 126/100 milliliters compared to the geometric mean of all samples collected over the recreation period.*
 - (2) *Enterococci: The Enterococci geometric mean criterion is 33/100 ml. For swimming advisory and permitting purposes, Enterococci shall not exceed a monthly geometric mean of 33/100 ml based upon a minimum of not less than five (5) samples collected over a period of not more than thirty (30) days. For swimming advisory and permitting purposes, no sample shall exceed a 75% one-sided confidence level of 61/100 ml in lakes and high use waterbodies and the 90% one-sided confidence level of 108/100 ml in all other Primary Body Contact Recreation beneficial use areas. These values are based upon all samples collected over the*

recreation period. For purposes of sections 303(d) and 305(b) of the federal Clean Water Act as amended, beneficial use support status shall be assessed using only the geometric mean criterion of 33/100 milliliters compared to the geometric mean of all samples collected over the recreation period.

2.1.2 Chapter 740: Implementation of OWQS for PBCR

To implement Oklahoma's WQS for PBCR, DEQ promulgated Chapter 740, *Implementation of Oklahoma's Water Quality Standards* (DEQ 2022). The following excerpt from Chapter 740 (OAC 252:740-15-6), stipulates how water quality data will be assessed to determine support of the PBCR use as well as how the water quality target for TMDLs will be defined for each bacterial indicator.

(a). **Scope.**

The provisions of this Section shall be used to determine whether the subcategory of Primary Body Contact of the beneficial use of Recreation designated in OAC 252:730 for a waterbody is supported during the recreation season from May 1 through September 30 each year. Where data exist for multiple bacterial indicators on the same waterbody or waterbody segment, the determination of use support shall be based upon the use and application of all applicable tests and data.

(b). ***Escherichia coli (E. coli).***

- (1) *The Primary Body Contact Recreation subcategory designated for a waterbody shall be deemed to be fully supported with respect to E. coli if the geometric mean of 126 colonies per 100 ml is met. These values are based upon all samples collected over the recreation period in accordance with OAC 252:740-15-3(c).*
- (2) *The Primary Body Contact Recreation subcategory designated for a waterbody shall be deemed to be not supported with respect to E. coli if the geometric mean of 126 colonies per 100 ml is not met. These values are based upon all samples collected over the recreation period in accordance with OAC 252:740-15-3(c).*

(c). ***Enterococci.***

- (1) *The Primary Body Contact Recreation subcategory designated for a waterbody shall be deemed to be fully supported with respect to Enterococci if the geometric mean of 33 colonies per 100 ml is met. These values are based upon all samples collected over the recreation period in accordance with OAC 252:740-15-3(c).*
- (2) *The Primary Body Contact Recreation subcategory designated for a waterbody shall be deemed to be not supported with respect to Enterococci if the geometric mean of 33 colonies per 100 ml is not met. These values are based upon all samples collected over the recreation period in accordance with OAC 252:740-15-3(c).*

Compliance with the Oklahoma WQS is based on meeting requirements for both *E. coli* and Enterococci bacterial indicators in addition to the minimum sample requirements for assessment. Where concurrent data exist for multiple bacterial indicators on the same waterbody or waterbody segment, each indicator group must demonstrate compliance with the numeric criteria prescribed (DEQ 2022).

As stipulated in the WQS, only the geometric mean of all samples collected over the primary recreation period shall be used to assess the impairment status of a stream segment. Therefore, only the geometric mean criteria will be used to develop TMDLs for *E. coli* and Enterococci.

2.1.3 Chapter 730: Criteria for Turbidity

The beneficial use of WWAC is one of several subcategories of the Fish and Wildlife Propagation use established to manage the variety of communities of fish and shellfish throughout the state (DEQ 2022). The numeric criteria for turbidity to maintain and protect the use of “Fish and Wildlife Propagation” from OAC 252:730-5-12(f)(7) is as follows:

- (A) *Turbidity from other than natural sources shall be restricted to not exceed the following numerical limits:*
 - i. *Cool Water Aquatic Community/Trout Fisheries: 10 NTUs;*
 - ii. *Lakes: 25 NTU; and*
 - iii. *Other surface waters: 50 NTUs.*
- (B) *In waters where background turbidity exceeds these values, turbidity from point sources will be restricted to not exceed ambient levels.*
- (C) *Numerical criteria listed in (A) of this paragraph apply only to seasonal base flow conditions.*
- (D) *Elevated turbidity levels may be expected during, and for several days after, a runoff event.*

2.1.4 Chapter 740: Implementation of OWQS for Fish and Wildlife Propagation

Chapter 740, *Implementation of Oklahoma’s Water Quality Standards* (DEQ 2022) describes Oklahoma’s WQS for Fish and Wildlife Propagation. The following excerpt (OAC 252:740-15-5) stipulates how water quality data will be assessed to determine support of fish and wildlife propagation as well as how the water quality target for TMDLs will be defined for turbidity:

Assessment of Fish and Wildlife Propagation Support

- (a). *Scope. The provisions of this Section shall be used to determine whether the beneficial use of Fish and Wildlife Propagation or any subcategory thereof designated in OAC 252:730 for a waterbody is supported.*

- (e). *Turbidity. The criteria for turbidity stated in 252:730-5-12(f)(7) shall constitute the screening levels for turbidity. The tests for use support shall follow the default protocol in 252:740-15-4(b).*

252:740-15-4. Default Protocols

- (b). *Short term average numerical parameters.*
- (1) *Short term average numerical parameters are based upon exposure periods of less than seven days. Short term average parameters to which this Section applies include, but are not limited to, sample standards and turbidity.*
 - (2) *A beneficial use shall be deemed to be fully supported for a given parameter whose criterion is based upon a short term average if 10% or less of the samples for that parameter exceeds the applicable screening level prescribed in this Subchapter.*
 - (3) *A beneficial use shall be deemed to be fully supported but threatened if the use is supported currently but the appropriate state environmental agency determines that available data indicate that during the next five years the use may become not supported due to anticipated sources or adverse trends of pollution not prevented or controlled. If data from the preceding two year period indicate a trend away from impairment, the appropriate agency shall remove the threatened status.*
 - (4) *A beneficial use shall be deemed to be not supported for a given parameter whose criterion is based upon a short term average if at least 10% of the samples for that parameter exceed the applicable screening level prescribed in this Subchapter.*

2.1.5 Chapter 740: Minimum Number of Samples

Chapter 740, *Implementation of Oklahoma's Water Quality Standards* (DEQ 2022). The excerpt below from Chapter 740 (OAC 252:740-15-3(d)), stipulates the minimum number of samples to assess beneficial use.

252:740-15-3. Data Requirements

- (d). ***Minimum number of samples.***

- (1) *Except when (f) of this Section applies, or unless otherwise noted in subchapter 252:740-15 for a particular parameter, a minimum number of samples shall be required to assess beneficial use support.*
 - a. *For streams and rivers, a minimum of 10 samples shall be required.*
 - b. *For lakes greater than 250 surface acres, a minimum of 20 samples shall be required.*
 - c. *For lakes 250 surface acres or smaller, a minimum of 10 samples shall be required.*

- d. For toxicants for the protection of the Fish and Wildlife Propagation and Public and Private Water beneficial uses, a minimum of 5 samples shall be required.*
- (2) In order to satisfy the minimum sample requirements of this sub-section, samples may be aggregated consistent with the spatial and temporal requirements prescribed in (b), (c), and (d) of this Section.*
- (3) The prescribed minimum samples shall not be necessary if the available samples already assure exceedance of the applicable percentage for beneficial use assessment.*
- (4) If a mathematical calculation including, but not limited to, a mean, median, or quartile, is required for assessment, a minimum of ten samples shall be required, regardless of the parameter type.*

Additional samples for the calculation of temperature, pH and hardness dependent acute and chronic criteria shall be collected as required by OAC 252:740-5-8.

2.1.6 Prioritization of TMDL Development

Table 2-2 summarizes the PBCR and WWAC use attainment status and the bacterial and turbidity impairment status for streams in the Study Area. The TMDL priority shown in **Table 2-2** is directly related to the TMDL target date. The TMDLs established in this report, which are a necessary step in the process of restoring water quality, only address bacterial and/or turbidity impairments that affect the PBCR and WWAC beneficial uses.

After the [303\(d\) list](#) is compiled, DEQ assigns a four-level rank to each of the Category 5a waterbodies. This rank helps in determining the priority for TMDL development. The rank is based on criteria developed using the procedure outlined in the [2012 Continuing Planning Process](#) (pp. 139-140). The TMDL prioritization point totals calculated for each watershed were broken down into the following four priority levels:¹

Priority 1 watersheds - above the 90th percentile

Priority 2 watersheds - 70th to 90th percentile

Priority 3 watersheds - 40th to 70th percentile

Priority 4 watersheds - below the 40th percentile

Each waterbody on the 2022 303(d) list has been assigned a potential date of TMDL development based on the priority level for the corresponding HUC 11 watershed.

Priority 1 watersheds are targeted for TMDL development within the next two years.

¹ Appendix C, 2022 Integrated Report

Other priority watersheds are established for TMDL development within the next five years for Priority 2, eight years for Priority 3, and eleven years for Priority 4.

Table 2-2 Excerpt from the 2022 Integrated Report – Oklahoma 303(d) List of Impaired Waters

Waterbody ID	Waterbody Name	Stream Miles	TMDL Date	Priority	ENT	<i>E. coli</i>	Designated Use Primary Body Contact Recreation	Turbidity	Designated Use Warm Water Aquatic Community	Designated Use Cool Water Aquatic Community
OK220100010010_00	Poteau River	23.89	2030	3	X		N	X*	N	
OK220100010010_10	Poteau River	1.55	2033	4	X		N		F	
OK220100020010_10	Poteau River	27.04	2030	3	X	X	N		N	
OK220200050010_00	Lee Creek	1.87	2030	3	X		N			N
OK220600010100_20	Mill Creek	24.16	2027	2			F	X	N	
OK220600030010_00	Brushy Creek	2.96	2027	2	X*		N	X	N	
OK220600040030_00	Beaver Creek	9.11	2024	1		X*	N	X	N	
OK410210020150_00	Terrapin Creek	13.47	2024	1			F	X		N
OK410400010010_20	Red River	4.86	2033	4	X*		N	X	N	
OK410400020200_00	Caney Creek	11.67	2030	3	X*	X*	N	X	N	
OK410400080010_00	North Boggy Creek	27.84	2024	1			I	X	N	

ENT = Enterococci; F = Fully supporting; N = Not supporting; I = Insufficient information; X = Criterion exceeded Source: 2022 Integrated Report, DEQ 2022
 * = TMDL completed in another report

2.2 Problem Identification

This subsection summarizes water quality data caused by elevated levels of impairments.

2.2.1 Bacterial Data Summary

Table 2-3 summarizes water quality data collected during primary contact recreation season from the WQM stations between 2000 and 2020 for each indicator bacteria. The data summary in **Table 2-3** provides a general understanding of the amount of water quality data available and the severity of exceedances of the water quality criteria. This data collected during the primary contact recreation season was used to support the decision to place specific waterbodies within the Study Area on the DEQ 2022 303(d) list (DEQ 2022). Water quality data from the primary contact recreation season are provided in Appendix A. For the data collected between 2000 and 2020, evidence of nonsupport of the PBCR use based on Enterococci and *E. coli* exceedances was observed in five waterbodies: Poteau River (OK220100010010_00), Brushy Creek (OK220600030010_00), and Red River (OK410400010010_20) for Enterococci impairments, and Poteau River (OK220100020010_10) and Caney Creek (OK410400020200_00) for both Enterococci and *E. coli* impairments.

The Enterococci impairment for Brushy Creek (OK220600030010_00) was addressed with an Enterococci TMDL in the 2008 Bacteria Total Maximum Daily Loads for OK220100, OK220200, OK220600 in the Sans Bois Creek Area, Oklahoma Report. The Enterococci impairment for the Red River (OK410400010010_20) was addressed with an Enterococci TMDL in the 2007 Bacteria Total Maximum Daily Loads for OK410400, OK410600, OK410700 in the Boggy Creek Area, Oklahoma Report. The Enterococci and *E. coli* impairments for Caney Creek (OK410400020200_00) were addressed with bacterial TMDLs in the 2016 Bacterial and Turbidity Total Maximum Daily Loads for Oklahoma Streams in the Kiamichi-Clear-Muddy Boggy Watershed Areas (OK410300, OK410310, OK410400) Report. In addition, detailed review of the data collected in 2000 for Beaver Creek (OK220600040030_00) indicated an insufficient number of samples were available, therefore it is recommended the impairment for *E. coli* in Beaver Creek (OK220600040030_00) be removed from the 303(d) list. Two waterbodies, Poteau River (OK220100010010_10) and Lee Creek (OK220200050010_00), are listed in the 2022 303(d) list with Enterococci impairments, but there is no water quality data on these stream segments. Therefore, it is recommended that for the next 303(d) list, both waterbodies have their Enterococci impairment removed from the 303(d) list. Therefore, in this report, only the Enterococci TMDL for Poteau River (OK220100010010_00) and Enterococci and *E. coli* TMDLs for Poteau River (OK220100020010_10) will be presented in this report.

2.2.2 Turbidity Data Summary

Turbidity is a measure of water clarity and is caused by suspended particles in the water column. Because turbidity cannot be expressed as a mass load, total suspended solids (TSS) are used as a surrogate in this TMDL. Therefore, both turbidity and TSS data are presented in this subsection.

Table 2-4 summarizes water quality data collected from the WQM stations between 2000 and 2021 for turbidity. However, as stipulated in Title 252:730-5-12 (f)(7)(C), numeric criteria for turbidity only apply under base flow conditions. While the base flow condition is not specifically defined in the Oklahoma WQS, DEQ considers base flow conditions to be all flows less than the 25th flow exceedance percentile (i.e., the lower 75% of flows) which is consistent with the USGS Streamflow Conditions Index (USGS 2009). Therefore, **Table 2-5** was prepared to represent the subset of these data for samples collected during base flow conditions. Water quality samples collected under flow conditions greater than the 25th flow exceedance percentile (highest flows) were therefore excluded from the data set used for TMDL analysis. Using this qualified data set, eight waterbodies identified in **Table 2-5** indicate nonsupport of the Fish and Wildlife Propagation use based on turbidity levels observed in the waterbody. However, Poteau River (OK220100010010_00) had a turbidity TMDL completed in the 2014 Bacterial and Turbidity TMDLs for Streams in the Lower Arkansas River Area Report. The other seven waterbodies with turbidity impairments identified in **Table 2-5** will have turbidity TMDLs completed in this report.

Table 2-6 summarizes water quality data collected from the WQM stations between 1998 and 2021 for TSS. **Table 2-7** presents a subset of these data for samples collected during base flow conditions. In using TSS as a surrogate to support TMDL development, at least 10 TSS samples are required to conduct the regression analysis between turbidity and TSS. The water quality data analyzed for turbidity and TSS are provided in Appendix A.

2.3 Water Quality Targets

The Code of Federal Regulations (40 CFR § Part 130.7(c)(1)) states that, “TMDLs shall be established at levels necessary to attain and maintain the applicable narrative and numerical water quality standards.” The water quality targets for *E. coli* and Enterococci are geometric mean standards of 126 colonies/100ml and 33 colonies/100ml, respectively. The TMDL for bacteria will incorporate an explicit 10% margin of safety.

An individual water quality target established for turbidity must demonstrate compliance with the numeric criteria prescribed in the Oklahoma WQS (DEQ 2022). According to the Oklahoma WQS [252:730-5-12(f)(7)], the turbidity numerical criterion for streams with WWAC beneficial use is 50 NTUs and with CWAC beneficial use is 10 NTUs (DEQ 2022). The turbidity of 50 NTUs or 10 NTUs applies only to seasonal base flow conditions. Turbidity levels are expected to be elevated during, and for several days after, a storm event.

TMDLs for turbidity in streams designated as WWAC or CWAC must take into account that no more than 10% of the samples may exceed the numeric criterion of 50 NTU or 10 NTU, respectively. However, as described above, because turbidity cannot be expressed as a mass load, TSS is used as a surrogate for TMDL development. Since there is no numeric criterion in the Oklahoma WQS for TSS, a specific method must be developed to convert the turbidity criterion to TSS based on a relationship between turbidity and TSS. The method for deriving the relationship between turbidity and TSS and for calculating a water body specific water quality goal using TSS is summarized in SECTION 4 of this report.

The MOS for the TSS TMDLs varies by waterbody and is related to the goodness-of-fit metrics of the turbidity-TSS regressions. The method for defining MOS percentages is described in SECTION 5 of this report.

Table 2-3 Summary of Assessment of Indicator Bacterial Samples from Primary Body Contact Recreation Subcategory Season May 1 to September 30, 2000-2020

Waterbody ID	Waterbody Name	Indicator	Sampling Period	Number of Samples	Geometric Mean Conc (colonies/100 ml)	Assessment Results / Recommended Actions
OK220100010010_00	Poteau River	ENT	2013-2014	10	87	Impaired / TMDL
		EC	2013-2014	10	43	Geometric mean meets criterion / No TMDL
OK220100010010_10	Poteau River	ENT	N/A	0	N/A	Insufficient data / Delist from 303d list and no TMDL
OK220100020010_10	Poteau River	ENT	2011-2014	25	367	Impaired / TMDL
		EC	2011-2014	25	185	Impaired / TMDL
OK220200050010_00	Lee Creek	ENT	N/A	0	N/A	Insufficient data / Delist from 303d list and no TMDL
OK220600010100_20	Mill Creek	EC	2014-2019	14	6	Geometric mean meets criterion / No TMDL
OK220600030010_00	Brushy Creek	ENT	2006-2008	11	57	Impaired & 2008 TMDL / No TMDL
		EC	2006-2008	11	100	Geometric mean meets criterion / No TMDL
OK220600040030_00	Beaver Creek	ENT	2000	1	12	Insufficient data / No TMDL
		EC	2000	2	15	Insufficient data / Delist from 303d list
OK410210020150_00	Terrapin Creek	ENT	2010-2011	10	24	Geometric mean meets criterion / No TMDL
		EC	2012-2016	10	19	Geometric mean meets criterion / No TMDL
OK410400010010_20	Red River	ENT	2013-2015	10	197	Impaired & 2007 TMDL / No TMDL
		EC	2013-2015	10	16	Geometric mean meets criterion / No TMDL
OK410400020200_00	Caney Creek	ENT	2007-2011	10	210	Impaired & 2015 TMDL / No TMDL
		EC	2015-2020	10	182	Impaired & 2015 TMDL / No TMDL
OK410400080010_00	North Boggy Creek	EC	2015-2016	9	72	Geometric mean meets criterion / No TMDL

N/A = Not available;

Enterococci (ENT) water quality criterion = Geometric Mean of 33 colonies/100 mL;

E. coli (EC) water quality criterion = Geometric Mean of 126 colonies/100 mL;

TMDLs will be developed for waterbodies highlighted in green

Table 2-4 Summary of All Turbidity Samples, 2000-2021

Waterbody ID	Waterbody Name	WQM Stations	Sampling Period	Number of Turbidity Samples	Number of Samples Exceeding Criterion	% Samples Exceeding Criterion	Average Turbidity (NTU)
OK220100010010_00	Poteau River	220100010010-001AT	2016 - 2021	27	11	41%	58.7
OK220600010100_20	Mill Creek	OK220600-01-0100J	2018 - 2020	22	6	27%	36.6
OK220600030010_00	Brushy Creek	220600030010-001AT	2013 - 2020	26	5	19%	58.2
OK220600040030_00	Beaver Creek	OK220600-04-0030G	2000 - 2001	13	4	31%	40.0
OK410210020150_00	Terrapin Creek	OK410210-02-0150G	2015 - 2017	22	8	36%	10.1
OK410400010010_20	Red River	410400010010-001AT	2016 - 2021	27	8	30%	42.6
OK410400020200_00	Caney Creek	OK410400-02-0200G	2015 - 2017	20	5	25%	42.6
OK410400080010_00	North Boggy Creek	OK410400-08-0010E	2016 - 2017	11	4	36%	44.4

Table 2-5 Summary of Turbidity Samples Excluding High Flow Samples, 2000-2021

Waterbody ID	Waterbody Name	WQM Stations	Number of Turbidity Samples	Number of Samples Greater Than Criterion	% Samples Exceeding Criterion	Average Turbidity (NTU)	Assessment Results / Recommended Actions
OK220100010010_00	Poteau River	220100010010-001AT	19	5	26%	36.6	Impaired & 2013 TMDL / No TMDL
OK220600010100_20	Mill Creek	OK220600-01-0100J	11	2	18%	31.8	Impaired / TMDL
OK220600030010_00	Brushy Creek	220600030010-001AT	24	3	13%	30.3	Impaired / TMDL
OK220600040030_00	Beaver Creek	OK220600-04-0030G	11	3	27%	38.5	Impaired / TMDL
OK410210020150_00	Terrapin Creek	OK410210-02-0150G	15	3	20%	8.0	Impaired / TMDL
OK410400010010_20	Red River	410400010010-001AT	19	3	16%	30.7	Impaired / TMDL
OK410400020200_00	Caney Creek	OK410400-02-0200G	15	3	20%	35.3	Impaired / TMDL
OK410400080010_00	North Boggy Creek	OK410400-08-0010E	11	4	36%	44.4	Impaired / TMDL

TMDLs will be developed for waterbodies highlighted in tan.

Table 2-6 Summary of All TSS Samples, 1998-2021

Waterbody ID	Waterbody Name	WQM Stations	Number of TSS Samples	Average TSS (mg/L)
OK220600010100_20	Mill Creek	OK220600-01-0100J	19	11.6
OK220600030010_00	Brushy Creek	220600030010-001AT	0	
OK220600040030_00	Beaver Creek	OK220600-04-0030G	13	25.8
OK410210020150_00	Terrapin Creek	OK410210-02-0150G	20	5.0
OK410400010010_20	Red River	410400010010-001AT	24	62.0
OK410400020200_00	Caney Creek	OK410400-02-0200G	19	23.7
OK410400080010_00	North Boggy Creek	OK410400-08-0010E	10	14.0

Table 2-7 Summary of TSS Samples Excluding High Flow Samples, 1998-2021

Waterbody ID	Waterbody Name	WQM Stations	Number of TSS Samples	Average TSS (mg/L)
OK220600010100_20	Mill Creek	OK220600-01-0100J	9	15.6
OK220600030010_00	Brushy Creek	220600030010-001AT	0	
OK220600040030_00	Beaver Creek	OK220600-04-0030G	11	29.0
OK410210020150_00	Terrapin Creek	OK410210-02-0150G	13	5.0
OK410400010010_20	Red River	410400010010-001AT	16	38.3
OK410400020200_00	Caney Creek	OK410400-02-0200G	14	15.4
OK410400080010_00	North Boggy Creek	OK410400-08-0010E	10	14.0

SECTION 3 POLLUTANT SOURCE ASSESSMENT

3.1 Overview

A pollutant source assessment characterizes known and suspected sources of pollutant loading to impaired waterbodies. Sources within a watershed are categorized and quantified to the extent that information is available. Pathogen indicator bacteria originate from the digestive tract of warm-blooded animals, and sources may be point or nonpoint in nature. Turbidity may originate from OPDES-permitted facilities, fields, construction sites, quarries, stormwater runoff and eroding stream banks.

Point source dischargers are permitted through the OPDES program. OPDES-permitted facilities that discharge treated wastewater to the bacterially impaired waterbody are currently required to monitor for *E. coli*. Nonpoint sources are diffuse sources that typically cannot be identified as entering a waterbody through a discrete conveyance at a single location. Nonpoint sources may emanate from natural sources or land activities that contribute bacteria or TSS, to surface water as a result of rainfall runoff. For the TMDLs in this report, all sources of pollutant loading not regulated by OPDES permits are considered nonpoint sources.

The potential nonpoint sources for bacteria were compared based on the fecal coliform load produced in each subwatershed. Although fecal coliform is no longer used as a bacterial indicator in the Oklahoma WQS, it is still valid to use fecal coliform concentration or loading estimates to compare the potential contributions of different nonpoint sources because *E. coli* is a subset of fecal coliform. Currently there is insufficient data available in the scientific arena to quantify counts of *E. coli* in feces from warm-blooded animals discussed in SECTION 3.

The following nonpoint sources of bacteria were considered in this report:

- Wildlife (deer)
- Non-Permitted Agricultural Activities and Domesticated Animals
- Pets (dogs and cats)
- Failing Onsite Wastewater Disposal (OSWD) Systems and Illicit Discharges

The 2022 Integrated Water Quality Assessment Report (DEQ 2022) listed potential sources of turbidity as:

- Grazing in riparian corridors of streams and creeks
- Highway/road/bridge runoff (non-construction related)
- Non-irrigated crop production
- Petroleum/natural gas activities
- Rangeland grazing

- Unknown sources
- Agriculture

The following discussion describes what is known regarding point and nonpoint sources of bacteria and/or TSS in the impaired watersheds. Where information was available on point and nonpoint sources of indicator bacteria and/or TSS data were provided and summarized as part of each category.

3.2 OPDES-Permitted Facilities

Under 40 CFR § Part 122.2, a point source is described as a discernable, confined, and discrete conveyance from which pollutants are or may be discharged to surface waters. OPDES-permitted facilities classified as point sources that may contribute bacterial and/or TSS loading into the watersheds include:

- Continuous Point Source Dischargers
 - OPDES municipal wastewater treatment facilities (WWTF)
 - OPDES Industrial WWTF Discharges
- OPDES-regulated stormwater discharges
 - Municipal separate storm sewer system (MS4) discharges
 - Phase 1 MS4
 - Phase 2 MS4 – OKR04
 - Multi-sector general permits (OKR05)
 - Regulated Sector J Discharges
 - Rock, Sand and Gravel Quarries
 - Construction stormwater discharges (OKR10)
- No-discharge WWTF
- Sanitary sewer overflow (SSO)
- AgPDES Animal Feeding Operations (AFO)
 - Concentrated Animal Feeding Operations (CAFO)
 - Swine Feeding Operation (SFO)
 - Poultry Feeding Operation (PFO)

Six watersheds in the Study Area [Lee Creek (OK220200050010_00), Mill Creek (OK220600010100_20), Beaver Creek (OK220600040030_00), Terrapin Creek (OK410210020150_00), Caney Creek (OK410400020200_00), and North Boggy Creek (OK410400080010_00)] have no OPDES-permitted facilities within their contributing watershed. There is at least one OPDES-permitted facility in each of the remaining five

watersheds in the Study Area [Poteau River (OK220100010010_00), Poteau River (OK220100010010_10), Poteau River (OK220100020010_10), Brushy Creek (OK220600030010_00), and Red River (OK410400010010_20)].

CAFOs are recognized by EPA as potential significant sources of pollution and may have the potential to cause serious impacts to water quality if not properly managed.

3.2.1 Continuous Point Source Dischargers

Continuous point source discharges, such as WWTFs, could result in discharge of elevated concentrations of indicator bacteria if the disinfection unit is not properly maintained, is of poor design, or if flow rates are above the disinfection capacity.

While the no-discharge facilities do not discharge wastewater directly to a waterbody, it is possible that continuous point source discharges from municipal and industrial WWTFs could result in discharge of elevated concentrations of bacteria or TSS if a facility is not properly maintained, is of poor design, or flow rates exceed capacity. However, in most cases suspended solids discharged by WWTFs receiving primarily domestic sewage consist primarily of organic solids rather than inorganic suspended solids (i.e., soil and sediment particles from erosion or sediment resuspension). Discharges of organic suspended solids from such WWTFs are addressed by DEQ through its permitting of point sources to maintain WQS for dissolved oxygen and are not considered a potential source of turbidity in this TMDL. Therefore, TSS in domestic wastewater will be considered to be organic suspended solids and their limit will be determined based on the presence of Biochemical Oxygen Demand (BOD) or Carbonaceous Biochemical Oxygen Demand (CBOD) limits in the discharge permit. Industrial WWTFs discharging primarily inorganic suspended solids will be considered as a TSS source and will receive TSS WLAs unless they provide the effluent information verifying that the organic TSS fraction is greater than 70%, similar to that found in treated domestic wastewater.

The locations of the OPDES-permitted facilities that discharge wastewater to surface waters addressed in these TMDLs are listed in **Table 3-1** and displayed in **Figure 3-1**.

3.2.1.1 Municipal OPDES WWTFs

There are seven active permitted municipal point source facilities within the Study Area. Municipal WWTFs are designated with a Standard Industrial Code (SIC) number 4952. They discharge organic TSS with limits for CBOD₅ so they are not considered a potential source of turbidity. Brushy Creek (OK220600030010_00) and Red River (OK410400010010_20) were assessed as fully supporting or have previously developed TMDL for bacteria in another report. A municipal facility in Poteau River (OK220100010010_10) will not be included in a WLA because of no TMDL in this study. Therefore, only the three municipal wastewater treatment facilities in the Poteau River (OK220100010010_00 and OK220100020010_10) watersheds will receive WLA for their bacteria TMDL. DMR data for the remaining non-4952 active facilities are provided in 5.9.2Appendix B.

3.2.1.2 Industrial OPDES WWTFs

There are six active OPDES industrial point source dischargers in this Study Area. The Poteau River segments (OK220100010010_00, OK220100010010_10, and OK220100020010_10) have five industrial facilities in their watersheds that are coal mines and quarries, and therefore are not considered as a bacterial source. However, in the Poteau River (OK220100010010_00), the OG&E River Valley Generating Station (OK0040169) has *E. coli* limits included in their permit. Therefore, the OG&E River Valley Generating Station will be included in the WLA for the bacteria TMDL calculation.

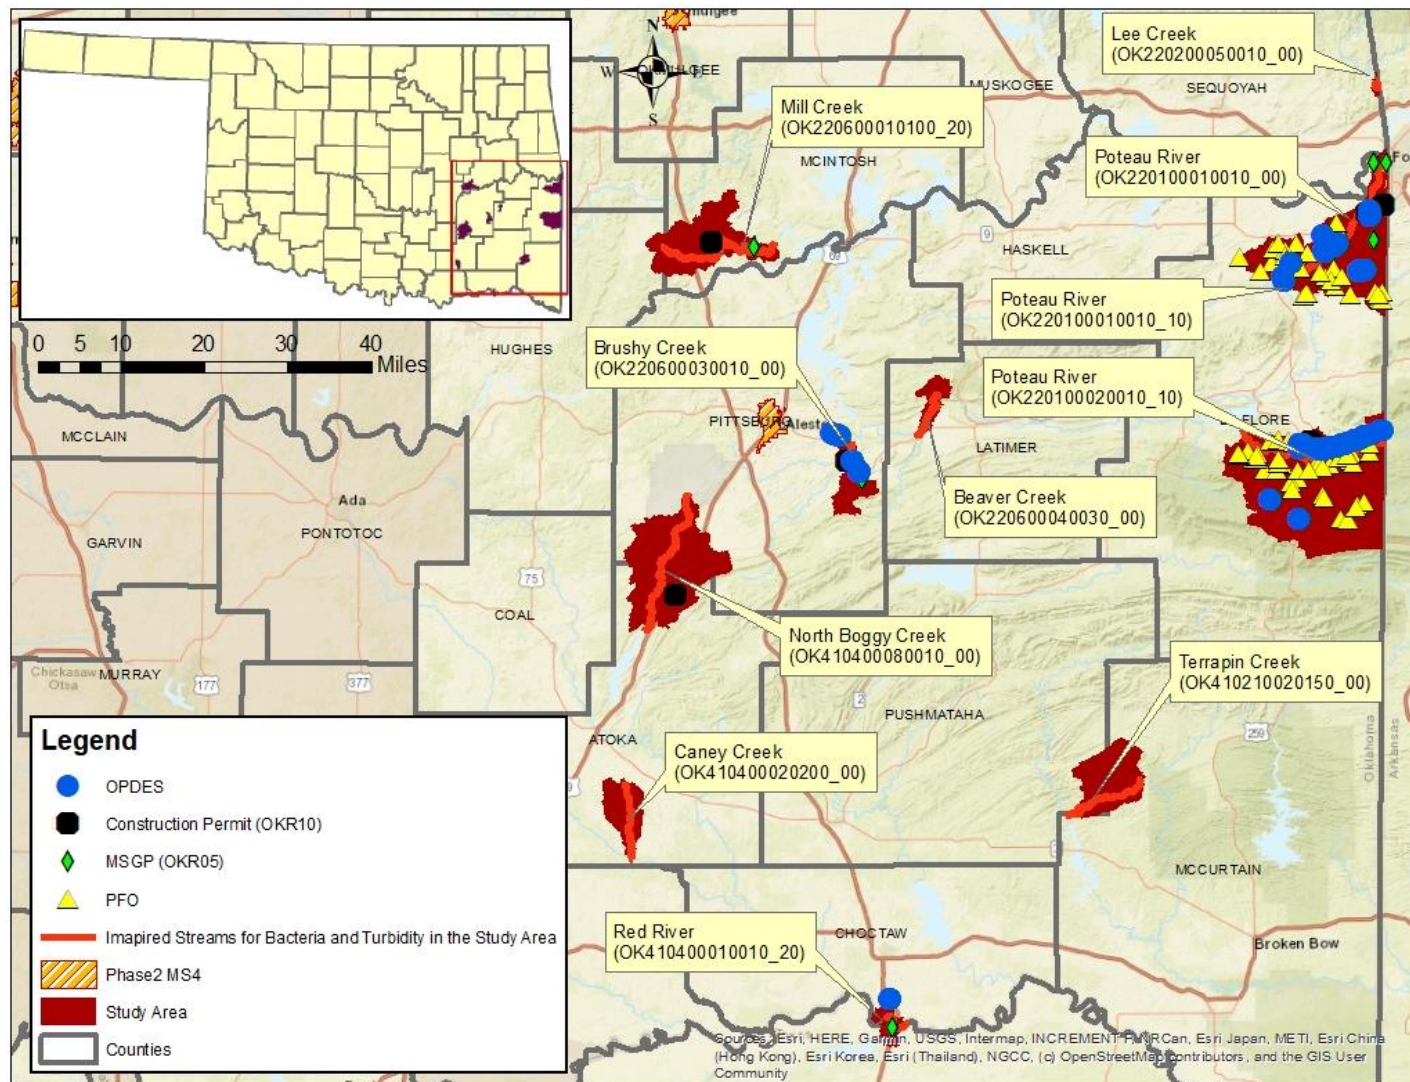
Figure 3-1 Location of OPDES-Permitted Facilities and AgPDES-Permitted AFOs in the Study Area

Table 3-1 Point Source Discharges in the Study Area

Watershed	OPDES Permit No.	Facility	SIC code	Facility ID	Facility Type	Design Flow (MGD)	Avg Monthly/ Weekly E. coli colonies /100mL	Avg/ Max TSS mg/L	Expiration Date	Notes
Poteau River (OK220100010010_00)	OK0040169	OG&E River Valley Generating Station	4911	40000750	Electric Services	*1.648	126/406	NA/38	9/30/2022	Active
Poteau River (OK220100010010_00)	OK0042781	Georges Colliers-Pollyanna #8	1222	40000930	Bituminous Coal Underground	*001: 0.019 002: 0 003: 0.0036 004: 0.006 005: 0 006: 2.027 007: 0 008: 0.0012	NA	35/37	12/31/2022	Active
Poteau River (OK220100010010_00)	OKG950045	APAC-Central, Inc.-Spiro	1429	40001160	Crushed and Broken Stone	*0	NA	NA/45	6/30/2023	Active
Poteau River (OK220100010010_00)	OK0034134	Pocola, Town of	4952	S20102	Sewerage Systems	0.55	May-Sep 126/406 Oct-Apr 630/2030	30/45	1/31/2025	Active
Poteau River (OK220100010010_00)	OKG040034	Farrell-Cooper Mining Co. – Rock Island	1221	40001120	Bituminous Coal and Lignite Surface Mining	NA	NA	35/70	Canceled 10/15/20	Inactive
Poteau River (OK220100010010_10)	OK0100633	Joslyn Manufacturing Company, LLC.	2491	40001190	Wood Preserving	NA	NA	NA	Closed 1/26/2022	Inactive
Poteau River (OK220100010010_10)	OK0031054	Panama PWA	4952	S20111	Sewerage Systems	0.2	May-Sep 126/406 Oct-Apr 630/2030	90/135	9/30/2023	Active
Poteau River (OK220100020010_10)	OK0038407	Heavener Utilities Authority	4952	S20119	Sewerage Systems	Apr-Oct 0.65 Nov-Mar 0.95	May-Sep 126/406 Oct-Apr 630/2030	15/22.5 30/45	8/31/2026	Active
Poteau River (OK220100020010_10)	OKG040014	Ouro Mining, Inc.-Heavener East #1	1221	40000980	Bituminous Coal and Lignite	NA	NA	35/70	Canceled 1/5/2017	Inactive

Watershed	OPDES Permit No.	Facility	SIC code	Facility ID	Facility Type	Design Flow (MGD)	Avg Monthly/ Weekly E. coli colonies /100mL	Avg/ Max TSS mg/L	Expiration Date	Notes
					Surface Mining					
Poteau River (OK220100020010_10)	OKG040035	Farrell-Cooper Mining Co.	1221	31000720	Bituminous Coal and Lignite Surface Mining	NA	NA	35/70	Canceled 2/11/2014	Inactive
Poteau River (OK220100020010_10)	OKG040025	Ouro Mining, Inc.-Heavener #3	1221	40001030	Bituminous Coal and Lignite Surface Mining	*001: 5.92 002: 2.0 003: 1.1 004: 4.31 005: 0.538	NA	35/70	11/30/2023	Active
Poteau River (OK220100020010_10)	OKG040003	Ouro Mining, Inc.-Heavener East #2	1221	40001010	Bituminous Coal and Lignite Surface Mining	*001: 0.65 002: 1.35 003: 1.35 004: 1.29 006: 3.0	NA	35/70	11/30/2023	Active
Poteau River (OK220100020010_10)	OK0022951	Jim E. Hamilton Correctional Center	4952	S20112	Sewerage Systems	0.08	126/406	90/135	6/30/2023	Active
Poteau River (OK220100020010_10)	OK0031828	US Forest Service – Cedar Lake	4952	S20121	Sewerage Systems	NA	May-Sep 126/406	30/45	Canceled 12/23/2020	Inactive
Poteau River (OK220100020010_10)	OKG040017	Farrell-Cooper Mining Co.-Pine Mountain	1221	40000760	Bituminous Coal and Lignite Surface Mining	NA	NA	35/70	Canceled 7/27/2010	Inactive
Brushy Creek (OK220600030010_00)	OK0100609	Farrell-Cooper-Pocahontas Mine	1221	61000190	Bituminous Coal and Lignite Surface Mining	NA	NA	35/70	Canceled 12/11/2020	Inactive
Brushy Creek (OK220600030010_00)	OK0028843	Haileyville, City of	4952	S20634	Sewerage Systems	0.13	May-Sep 126/406 Oct-Apr 630/2030	Nov-May 30/45 Jun-Oct 20/30	8/31/2025	Active

Watershed	OPDES Permit No.	Facility	SIC code	Facility ID	Facility Type	Design Flow (MGD)	Avg Monthly/ Weekly E. coli colonies /100mL	Avg/ Max TSS mg/L	Expiration Date	Notes
Brushy Creek (OK220600030010_00)	OK0022861	Hartshorne, City of	4952	S20633	Sewerage Systems	0.50	May-Sep 126/406 Oct-Apr 630/2030	Nov-May 20/30 Jun-Oct 15/22.5	1/31/2024	Active
Red River (OK410400010010_20)	OK0037826	Choctaw Co. RW&SD # 1-Grant	4952	S10421	Sewerage Systems	0.137	May-Sep 126/406 Oct-Apr 630/2030	90/135	12/31/2020	Active

NA = not available or not applicable

* Qe(30) was determined based on DMR data from 1/1/2018 to 12/31/2019

3.2.2 Stormwater Permits

Stormwater runoff from OPDES-permitted facilities (MS4s, facilities with multi-sector general permits, and construction sites) can contain impairments. The National Stormwater Quality Database (NSQD) summarizes concentrations for a number of pollutants of concern in stormwater runoff from around the country (Pitt et. al. 2004). Based on data summarized in the NSQD, median concentration in stormwater ranged from 700 to 1,900 counts/100mL for *E.coli* and from 17 to 99 mg/L for TSS (Pitt et. al. 2004).

EPA regulations [40 C.F.R. §130.2(h)] require that NPDES-regulated stormwater discharges must be addressed by the WLA component of a TMDL. However, any stormwater discharge by definition occurs during or immediately following periods of rainfall and elevated flow conditions when Oklahoma Water Quality Standard for turbidity does not apply. OWQS specify that the criteria for turbidity “apply only to seasonal base flow conditions” and go on to say “Elevated turbidity levels may be expected during, and for several days after, a runoff event” [OAC 252:730-5-12(f)(7)]. In other words, the turbidity impairment status is limited to base flow conditions so permitted stormwater discharges do not impair streams with TSS. Therefore, TSS WLAs for NPDES-regulated stormwater discharges are considered unnecessary in this TMDL report and will not be included in the TMDL calculations. Stormwater runoff from permitted areas can contain high fecal coliform concentrations.

3.2.2.1 Municipal Separate Storm Sewer System Permit

3.2.2.1.1 Phase I MS4

In 1990, EPA developed Phase I of the NPDES Stormwater Program. This program was designed to prevent harmful pollutants in MS4s from being washed by stormwater runoff into local waterbodies (EPA 2005). Phase I of the program required operators of medium and large MS4s (those generally serving populations of 100,000 or greater) to implement a stormwater management program as a means to control polluted discharges. Approved stormwater management programs for medium and large MS4s are required to address a variety of water quality-related issues, including roadway runoff management, municipal-owned operations, and hazardous waste treatment.

There are no Phase I MS4 facilities in the Study Area.

3.2.2.1.2 Phase II MS4 (OKR04)

In 1999, Phase II began requiring certain small MS4s to comply with the NPDES stormwater program. Small MS4s are defined as any MS4 that is not a medium or large MS4 covered by Phase I of the NPDES Stormwater Program. Phase II requires operators of regulated small MS4s to obtain NPDES permits and develop a stormwater management program. Programs are designed to reduce

discharges of pollutants to the “maximum extent practicable,” to protect water quality, and to satisfy appropriate water quality requirements of the CWA. Phase II MS4 stormwater programs must address the following six minimum control measures:

- ◆ Public Education and Outreach
- ◆ Public Participation/Involvement
- ◆ Illicit Discharge Detection and Elimination
- ◆ Construction Site Runoff Control
- ◆ Post- Construction Runoff Control
- ◆ Pollution Prevention/Good Housekeeping

In Oklahoma, Phase II General Permit (OKR04) for small MS4 communities has been in effect since 2005. Information about DEQ’s MS4 program can be found on-line at the following DEQ website: www.deq.ok.gov/water-quality-division/wastewater-stormwater/stormwater-permitting/okr04-municipal-stormwater/.

There is only one Phase II MS4 in the TMDL Study Area [the Town of Arkoma (OKR040046)]. The Town of Arkoma’s Phase II MS4, shown in **Figure 3-1**, will have a MS4 WLA in Poteau River (OK220100010010_00) bacterial TMDL calculation.

3.2.2.2 Multi-Sector General Permits (OKR05)

A [DEQ multi-sector industrial general permit \(MSGP\)](#) is required for stormwater discharges from all industrial facilities (DEQ 2022) whose Standard Industrial Classification (SIC) code is listed on Table 1-3 of the MSGP. Stormwater discharges from all industrial facilities occur only during or immediately following periods of rainfall and elevated flow conditions. Since turbidity criteria do not apply during these periods, stormwater is not considered a potential source of turbidity impairment.

There are nine facilities within the Study Area with multi-sector general permits. Information on the facilities with multi-sector general permits in the watersheds can be found in **Table 3-2**.

Table 3-2 Multi-Sector General Permits in Study Area

Watershed	Facility Name	County	Permit ID	Effective Date	SIC Code	Waterbody Name
Poteau River (OK220100010010_00)	Arkoma Sand Plant	Le Flore	OKR053422	5/19/2020	1442	Arkansas River
	Yaffe Iron and Metal Corporation	Le Flore	OKR051623	12/21/2017	5093	Poteau River
	Spiro Quarry	Le Flore	OKR050849	2/11/2019	1422	Unnamed tributary to the Poteau River
	A & L Auto Sales & Salvage	Le Flore	OKR052690	8/16/2017	5015	Unnamed tributary to the Poteau River
	River Valley Generating Station	Le Flore	OKR053684	6/4/2019	2813	Poteau River
Poteau River (OK220100020010_10)	O.K. Foods, Inc. - Heavener Feed Mill	Le Flore	OKR050764	2/16/2018	2048	Oil Branch
Mill Creek (OK220600010100_20)	Rock-It Natural Stone, Inc. - Eufaula #1	McIntosh	OKR053461	9/1/2018	1411	Mill Creek
Brushy Creek (OK220600030010_00)	Hartshorne Asphalt Plant	Pittsburg	OKR051803	3/13/2018	2951	Blue Creek
Red River (OK410400010010_20)	Drake Red River Pit	Choctaw	OKR051920	5/20/2019	1442	Red River

3.2.2.2.1 Regulated Sector J Discharges

Sector J facilities include crushed stone, construction sand & gravel, and industrial sand mines. The activities in these facilities include the exploration and mining of minerals (e.g., stone, sand, clay, chemical and fertilizer minerals, non-metallic minerals, etc.). A “mine” refers to an area of land actively excavated for the production of sand and gravel from natural deposits. Under the MSGP (OKR05), effluent from Sector J facilities include stormwater discharges associated with industrial activity from active and inactive mineral mining and mine dewatering. “Mine dewatering” is any water that is impounded or that collects in the mine and is pumped, drained, or otherwise removed from the mine through the efforts of the mine operator. This term also includes wet pit overflows caused solely by direct rainfall and uncontaminated ground water seepage. Specific requirements for Sector J stormwater discharges can be found in Part 11 of the [MSGP](#). Specific effluent limitation guidelines for Sector J SIC codes (1411, 1422, 1423, 1429, 1442, 1446, 1455, 1459, 1474, 1475, 1479, 1481, 1499) are referenced in Table 1-3 of the MSGP. The effluent guidelines [40 CFR § Part 436, Subpart B, C and D] are adopted by reference in the OPDES under [OAC 252:606-1-3\(b\)\(8\)](#).

Mine dewatering discharges can happen at any time and have the following specific effluent limitations:

- pH 6.5 to 9.0
- TSS Daily Maximum: 45 mg/L
- TSS Monthly Average: 25 mg/L

If the TMDL shows that a TSS limit more stringent than 45 mg/L is required, additional TSS limitations and monitoring requirements will be required. These additional requirements will be implemented under the MSGP. There are no mine dewatering discharges.

3.2.2.2.2 Rock, Sand and Gravel Quarries

Stormwater from rock, sand and gravel quarries in Oklahoma fall under the MSGP. But wastewater generated at quarries with SIC codes 1411, 1422, 1423, 1429, 1442, 1446 (excluding hydrofluoric acid (HF) flotation) and 3281 are regulated under [DEQ General Permit OKG950000](#). A rock, sand or gravel facility that does not fall under one of the previously mentioned SIC codes would be required to apply for an individual industrial wastewater permit before they would be allowed to discharge process wastewater or co-mingled stormwater. HF flotation has been excluded from coverage under this Permit due to more stringent effluent limitation guidelines in 40 CFR 436.42. Wastewater discharges regulated by this Permit are process wastewater and stormwater runoff that comes in direct

contact with active process areas associated with the mining of stone, sand, and gravel; cutting stone; crushing stone to size; washing and stockpiling of processed stone and sand; and washing and maintenance areas of vehicles and equipment. Permitted activities include discharge of industrial wastewater, construction or operation of industrial surface water impoundments, land application of industrial wastewater for dust suppression, and recycling of wastewater as wash water or cooling water.

Wastewater and stormwater runoff from mining activities have the potential to contain elevated suspended solids, chlorides, TDS and elevated pH due to contact with minerals. Suspended solids, as well as fugitive dust from operations, are a potential source of metals. Oil and grease may be generated due to equipment washing activities.

General Permit OKG950000 does not allow discharge of wastewater into Outstanding Resource Waters, High Quality Waters, Sensitive Public & Private Water Supplies including those with Reuse (SWS and SWSR), Cool Water Aquatic Communities, Trout Fisheries, Appendix B Waters [OAC 252:730-5-25(c)(2)], and within one (1) stream mile of a lake. In addition, for a new facility, no discharge is allowed into waterbodies listed as impaired for turbidity or pH in Oklahoma's 303(d) list. For existing facilities, discharges into turbidity-impaired streams are not allowed if their TMDL indicated that discharge limits more stringent than 45 mg/L for TSS or 6.5-9.0 standard units for pH are required. Also, if a facility discharges to a stream segment that is not included in Oklahoma's 303(d) list, but is within one mile upstream of an impaired segment, then the discharge will be treated as though it were to be to an impaired segment (DEQ 2018).

The General Permit contains technology-based daily maximum effluent limits of 45 mg/L for TSS, 15 mg/L for oil and grease, and pH range of 6.5–9.0. Industrial sand and gravel facilities (SIC code 1446) have an additional TSS effluent limit for monthly average of 25 mg/L which apply only to them. However, the Permit includes a provision that when exceedances of water quality criteria are determined to be the result of a facility's discharge to receiving waters, DEQ may determine that the facility is no longer eligible for coverage under the General Permit. DEQ will then require the facility to apply for an individual discharge permit with additional chemical-specific limits or toxicity testing requirements as necessary to protect the beneficial uses of the receiving stream.

There is one quarry in the TMDL Study Area with an OKG95 permit. However, APAC-Central, Inc.-Spiro (OKG950045) in the Poteau River (OK220100010010_00) watershed will not require a wasteload allocation since an Enterococci TMDL is to be complete

in this TMDL report, and not a turbidity TMDL. The turbidity TMDL for Poteau River (OK220100010010_00) was completed in the 2014 Bacterial and Turbidity Total Maximum Daily Loads for Oklahoma Streams in the Lower Arkansas River Area (OK220100, OK220200, OK220600) Report.

3.2.2.3 General Permit for Construction Activities (OKR10)

A [DEQ stormwater general permit for construction activities](#) is required for any stormwater discharges in the State of Oklahoma associated with construction activities that result in land disturbance equal to or greater than one acre or less than one acre if they are part of a larger common plan of development or sale that totals at least one acre. The permit also authorizes any stormwater discharges from support activities (e.g. [concrete or asphalt batch plants](#), equipment staging yards, material storage areas, excavated material disposal areas, and borrow areas) that are directly related to a construction site that is required to have permit coverage and is not a commercial operation serving unrelated different sites (DEQ 2022). Stormwater discharges occur only during or immediately following periods of rainfall and elevated flow conditions when the turbidity criteria do not apply. Therefore, stormwater is not considered possible contributor to turbidity impairment. The permits for construction projects that were active during the time period that samples were taken are summarized in **Table 3-3** and shown in **Figure 3-1**.

Table 3-3 Construction Permits Summary

Watershed	Facility	County	Permit ID	Date Issued	Receiving Water (Permit)	Estimated Acres
Poteau River (OK220100010010_00)	Choctaw Travel Plaza	Le Flore	OKR1030642	11/27/2019	Unnamed tributary to Cedar Creek	3.83
	Intersection Modification	Le Flore	OKR1031424	9/8/2020	Unnamed tributary to Poteau River; Cedar Creek	1.28
Poteau River (OK220100020010_10)	Hodgen, OK	Le Flore	OKR1031609	11/17/2020	Big Creek; Tributary to Big Creek; Cedar Creek; Poteau River, Black Fork; Poteau River; Oil Branch; and Tributary Oil Branch	2.06
Mill Creek (OK220600010100_20)	ODOT JP 28973 04	McIntosh	OKR1030936	3/13/2020	Mill Creek	10.36
Brushy Creek (OK220600030010_00)	ODOT JP 29246 04	Pittsburg	OKR1031985	3/31/2021	Blue Creek	2.34
North Boggy Creek (OK410400080010_00)	ODOT JP 28947 04	Atoka	OKR1031022	4/2/2020	Buck Creek	2.64

3.2.3 No-Discharge Facilities

Some facilities are classified as no-discharge. These facilities are required to sign an affidavit of no discharge. For the purposes of these TMDLs, it is assumed that no-discharge facilities do not contribute indicator bacterial or TSS loading. While no-discharge facilities do not discharge wastewater directly to a waterbody, it is possible that the collection systems associated with each facility may be a source of bacterial loading to surface waters. For example, discharges from the wastewater facility may occur during large rainfall events that exceed the systems' storage capacities.

There are no municipal no-discharge facilities in the TMDL Study Area.

3.2.4 Sanitary Sewer Overflows

Sanitary sewer overflow (SSO) from wastewater collection systems, although infrequent, can be a major source of indicator bacterial loading to streams. SSOs have existed since the introduction of separate sanitary sewers, and most are caused by blockage of sewer pipes by grease, tree roots, and other debris that clog sewer lines, by sewer line breaks and leaks, cross connections with storm sewers, and inflow and infiltration of groundwater into sanitary sewers. SSOs are permit violations that must be addressed by the responsible NPDES permittee. The reporting of SSOs has been strongly encouraged by EPA, primarily through enforcement and fines. While not all sewer overflows are reported, DEQ has some data on SSOs reported between 1990 and 2021. During that period 272 overflows were reported ranging from a minimal quantity to 10 million gallons.

Table 3-4 summarizes the SSO occurrences by NPDES facilities. Historical data of reported SSOs were not provided in the appendix due to the large number of reports, however the information can be provided upon request.

Table 3-4 Sanitary Sewer Overflow Summary (1990-2021)

Facility Name	OPDES Permit No.	Waterbody Name and Waterbody ID	Facility ID	Number of Occurrences	Date Range		Amount (Gallons)	
					From	To	Min	Max
Town of Pocola	OK0034134	Poteau River OK220100010010_00	S-20102	161	1994	2020	0	2 million
Heavener	OK0038407	Poteau River OK220100020010_10	S-20119	109	1990	2021	0	10 million
Jim Hamilton Correctional Facility	OK0022951	Poteau River OK220100020010_10	S-20112	1	2011	2011	NA	NA
Grant RWD #1	OK0037826	Red River OK410400010010_20	S-10421	1	2003	2003	NA	NA

NA = not available

3.2.5 Animal Feeding Operations

The [Agricultural Environmental Management Services \(AEMS\)](#) of the Oklahoma Department of Agriculture, Food and Forestry (ODAFF) was created to help develop, coordinate, and oversee environmental policies and programs aimed at protecting the Oklahoma environment from pollutants associated with agricultural animals and their waste. ODAFF is the NPDES-permitting authority for animal feeding operations in Oklahoma under what ODAFF calls the [Agriculture Pollutant Discharge Elimination System \(AgPDES\)](#). Through regulations (rules) established by the [Oklahoma Concentrated Animal Feeding Operation \(CAFO\) Act](#) (Title 2, Chapter 1, Article 20 – 40 to Article 20 – 64 of the State Statutes), [Swine Feeding Operation \(SFO\) Act](#) (Title 2, Chapter 1, Article 20 – 1 to Article 20 – 29 of the State Statutes), and [Poultry Feeding Operation \(PFO\) Registration Act](#) (Title 2, Chapter 10-9.1 to 10-9.12 of the State Statutes), AEMS works with producers and concerned citizens to ensure that animal waste does not impact the waters of the State.

All of these [animal feeding operations \(AFO\)](#) require an Animal Waste Management Plan (AWMP) to prevent animal waste from entering any Oklahoma waterbody. These plans outline how the animal feeding operator will prevent direct discharges of animal waste into waterbodies as well as any runoff of waste into waterbodies. The rules for all of these AFOs recommend using the [USDA NRCS' Agricultural Waste Management Field Handbook](#) to develop their Plan. NRCS has developed [Animal Waste Management software](#) to develop this Plan.

3.2.5.1 CAFO

A CAFO is an animal feeding operation that confines and feeds at least 1,000 animal units for 45 days or more in a 12-month period (ODAFF 2017). [AWMP](#) (Section 35:17-4-12), as specified in Oklahoma's CAFO regulations are designed to protect water quality through the use of structures such as dikes, berms, terraces, ditches, to isolate animal waste from outside surface drainage, except for a 25-year, 24-hour rainfall event.¹ AWMPs may include, but are not limited to, a [NRCS Geospatial Nutrient Tool](#) or [Nutrient Management Plan per EPA guidance](#).

CAFOs are considered no-discharge facilities for the purpose of the TMDL calculations in this report, they are not considered a source of TSS loading, and runoff of animal waste into surface waterbodies or groundwater is prohibited. CAFOs are designated by EPA as significant sources of pollution and may have the potential to cause serious impacts to water quality if not managed properly. Potential problems for CAFOs can include animal waste discharges to waters of the State and failure to properly operate wastewater lagoons.

¹ CAFO Animal Waste Management Plan Requirements [Title 35 (ODAFAFF), Chapter 17 (Water Quality), Subchapter 4 (Concentrated Animal Feeding Operations)] can be found in [35:17-4-12](#).

Oklahoma CAFO Rules require CAFOs to submit a *Documentation of No Hydrologic Connection* ([OAC 35:17-4-10](#)²) for all retention structures designed to prevent any leakage of wastewater into waterbodies. Thus, the potential for pollutant loading from CAFOs to a receiving stream is almost non-existent.

Per data provided by ODAFF in April 2014, there are no CAFOs located in this Study Area.

3.2.5.2 SFO

The purpose of the SFO Act is to provide for environmentally responsible construction and expansion of swine feeding operations and to protect the safety, welfare and quality of life of persons who live in the vicinity of a swine feeding operation.³ According to the SFO Act, a "concentrated swine feeding operation" is a lot or facility where swine kept for at least ninety (90) consecutive days or more in any twelve-month period and where crops, vegetation, forage growth or post-harvest residues are not grown during the normal growing season on any part of the lot.

SFOs are required to develop a [Swine Waste Management Plan](#)⁴, to prevent swine waste from being discharged into surface or groundwaters. This Plan includes the [BMPs](#) being used to prevent runoff & erosion. The Swine Waste Management Plan may include, but is not limited to, a Comprehensive Nutrient Management Plan (CNMP) per NRCS guidance or Nutrient Management Plan (NMP) per EPA guidance. SFOs are required to store wastewater in Waste Retention Structures (WRS) and either to land apply wastewater or make the WRS large enough to be total retention lagoons. SFOs are not allowed to discharge to State waterbodies.

For large SFOs with more than 1,000 animal units, monitoring wells or a leakage detection system for waste retention structures must be installed in order to monitor and control seepage/leakage [OAC 35:17-3-11(e)(6)]. Oklahoma Rules requires SFOs to submit a *Documentation of No Hydrologic Connection* (OAC 35:17-3-12) for all retention structures in order to prevent any leaking of wastewater to waterbodies.

² USDA NRCS design specifications in the [USDA NRCS Agricultural Waste Management Field Handbook Chapter 10](#) shall satisfy documentation of no hydrologic connection so long as the facility is designed by USDA NRCS and does not exceed one thousand (1,000) animal units.

³ A [concentrated swine feeding operation](#) has at least 750 swine that each weighs over 25 kilograms (about 55 pounds), 3,000 weaned swine weighing under 25 kilograms, or 300 swine animal units. A swine animal unit is a unit of measurement for any swine feeding operation calculated by adding the following numbers: The number of swine weighing over twenty-five (25) kilograms, multiplied by four-tenths (0.4), plus the number of weaned swine weighing under twenty-five (25) kilograms multiplied by one-tenth (0.1)

⁴ [Swine Animal Waste Management Plan Requirements](#) [Title 35 (ODAFF), Chapter 17 (Water Quality), Subchapter 3 (Swine Feeding Operations)] can be found in 35:17-3-14.

Thus, the potential for loading from SFOs to the receiving stream is almost non-existent.

There are no SFOs in this Study Area.

3.2.5.3 PFO

Poultry feeding operations not licensed under the Oklahoma Concentrated Animal Feeding Operation Act must register with the State Board of Agriculture. A registered PFO is an animal feeding operation which raises poultry and generates more than 10 tons of poultry waste (litter) per year. According to [PFO regulations](#), PFOs are required to develop an AWMP or an equivalent [nutrient management plan \(NMP\)](#) such as the [ODAFF Nutrient Management Plan](#) or [EPA Nutrient Management Plan](#). These plans describe how litter will be stored and applied properly in order to protect water quality of streams and lakes located in the watershed. A PFO AWMP must address both nitrogen and phosphorus. In order to comply with this TMDL, the registered PFOs in the watershed and their associated management plans must be reviewed. Further actions to reduce bacterial loads and achieve progress toward meeting the specified reduction goals must be implemented.

According to the [PFO rules \(Title 35, Chapter 17, Subchapter 5\)](#), runoff of poultry waste from the application site is prohibited. BMPs and practices must be used to minimize movement of poultry waste to waterbodies. Grassed strips at the edge of the field must be used to prevent runoff from carrying eroded soil and poultry waste into the waterbodies. Poultry waste is not allowed to be applied to land when the ground is saturated or while it is raining; and poultry waste application is prohibited on land with excessive erosion.⁵

PFOs located in nutrient limited watersheds should have a nutrient sample analysis from that year to make available.⁶ PFOs in non-nutrient limited watersheds perform nutrient sample analysis at least once every three years and must have available the most recent record of the analysis.

Per data provided by ODAFF in June 2014, the PFOs are located in the watershed as shown in **Table 3-5**. PFOs in the Study Area are shown in **Figure 3-1**. These PFOs are small animal feeding operations and are not required to get NPDES permits; they are required only to register with ODAFF. They generate dry litter and do not have any significant impact on the watershed.

⁵ PFO Animal Waste Management Plan Requirements [Title 35 (ODAFF), Chapter 17 (Water Quality), Subchapter 5 (Registered Poultry Feeding Operations)] can be found in 35:17-5-5.

⁶ Nutrient limited watersheds are defined in the Oklahoma Water Quality Standards (Title 252, Chapter 730). Nutrient limited watersheds can be found in Appendix A of the OWQS. They are the ones designated "NLW" in the "Remarks" column.

Table 3-5 Registered PFOs in Study Area

Waterbody Name	Company Name	Poultry ID	County	Type	Total Birds
Poteau River (OK220100010010_00)	OK Farms	1602	Le Flore	Broilers	48,200
	OK Farms	1511	Le Flore	Broilers	48,200
	OK Farms	152	Le Flore	Broilers	48,200
	OK Farms	1516	Le Flore	Broilers	72,300
	OK Farms	1400	Le Flore	Broilers	75,000
	OK Farms	515	Le Flore	Broilers	100,000
	OK Farms	974	Le Flore	Broilers	211,200
	OK Farms	1518	Le Flore	Broilers	79,200
	OK Farms	422	Le Flore	Broilers	50,000
	OK Farms	1049	Le Flore	Broilers	48,000
	OK Farms	1522	Le Flore	Broilers	346,400
	OK Farms	1424	Le Flore	Broilers	75,000
	OK Farms	1060	Le Flore	Broilers	75,000
	OK Farms	1502	Le Flore	Broilers	103,560
	OK Farms	1658	Le Flore	Broilers	150,000
	OK Farms	1472	Le Flore	Broilers	79,200
	OK Farms	665	Le Flore	Broilers	100,000
	OK Farms	141	Le Flore	Broilers	50,000
	OK Farms	411	Le Flore	Broilers	48,200
	OK Farms	825	Le Flore	Broilers	75,000
	OK Farms	87	Le Flore	Broilers	90,000
	OK Farms	1055	Le Flore	Broilers	119,200
	OK Farms	887	Le Flore	Broilers	48,000
	OK Farms	1473	Le Flore	Broilers	50,000
	OK Farms	250	Le Flore	Broilers	151,500
	OK Farms	27	Le Flore	Broilers	75,000
	OK Farms	28	Le Flore	Broilers	100,000
	OK Farms	1758	Le Flore	Broilers	20,000
	OK Farms	308	Le Flore	Broilers	50,000
Poteau River (OK220100020010_10)	OK Farms	1597	Le Flore	Layers	18,000
	Tyson Foods	186	Le Flore	Broilers	75,000
	OK Farms	523	Le Flore	Broilers	100,200
	Tyson Foods	1398	Le Flore	Broilers	48,200
	OK Farms	1288	Le Flore	Broilers	95,000
	OK Farms	1289	Le Flore	Broilers	40,000
	OK Farms	380	Le Flore	Broilers	40,000
	OK Farms	1464	Le Flore	Broilers	153,800
	OK Farms	240	Le Flore	Broilers	80,000
	OK Farms	1469	Le Flore	Broilers	60,000
	Tyson Foods	766	Le Flore	Broilers	100,000
	OK Farms	173	Le Flore	Broilers	52,000

Waterbody Name	Company Name	Poultry ID	County	Type	Total Birds
	OK Farms	156	Le Flore	Broilers	40,000
	OK Farms	651	Le Flore	Broilers	47,800
	OK Farms	568	Le Flore	Broilers	90,000
	OK Farms	567	Le Flore	Broilers	100,000
	OK Farms	876	Le Flore	Broilers	60,000
	OK Farms	641	Le Flore	Layers	10,000
	OK Farms	1621	Le Flore	Broilers	48,600
	OK Farms	653	Le Flore	Broilers	21,900
	OK Farms	1427	Le Flore	Broilers	82,300
	Tyson Foods	1445	Le Flore	Broilers	48,000
	OK Farms	1478	Le Flore	Broilers	40,000
	Tyson Foods	1752	Le Flore	Broilers	23,000
	OK Farms	970	Le Flore	Broilers	70,000
	OK Farms	602	Le Flore	Broilers	112,000
	OK Farms	1148	Le Flore	Layers	19,600
	OK Farms	658	Le Flore	Broilers	40,000
	OK Farms	643	Le Flore	Broilers	50,000
	Tyson Foods	1749	Le Flore	Broilers	69,000
	OK Farms	741	Le Flore	Broilers	50,000
	OK Farms	1156	Le Flore	Broilers	70,000
	OK Farms	113	Le Flore	Broilers	40,000
	OK Farms	1216	Le Flore	Broilers	40,000
	OK Farms	245	Le Flore	Broilers	78,000
	OK Farms	721	Le Flore	Broilers	50,000
	OK Farms	816	Le Flore	Broilers	50,000

3.2.6 Section 404 Permits

Section 404 (aka Section 1344) of the CWA establishes a program to regulate the discharge of dredged or fill material into waters of the United States, including wetlands. Activities in waters of the United States regulated under this program include fill for development, water resource projects (such as dams and levees), infrastructure development (such as highways and airports) and mining projects. Section 404 requires a permit before dredged or fill material may be discharged into waters of the United States, unless the activity is exempt from Section 404 regulation (e.g. certain farming and forestry activities).

Section 404 Permits are administrated by the U.S. Army Corps of Engineers (USACE). EPA reviews and provides comments on each permit application to make sure it adequately protects water quality and complies with applicable guidelines. Both USACE and EPA can take enforcement actions for violations of Section 404.

Discharge of dredged or fill material in waters can be a significant source of turbidity/TSS. The federal CWA requires that a permit be issued for activities which discharge dredged or fill materials into the waters of the United States, including wetlands. The State of Oklahoma will use its Section 401 Certification authority to ensure Section 404 Permits protect Oklahoma WQS.

3.3 Nonpoint Sources

Nonpoint sources include those sources that cannot be identified as entering the waterbody at a specific location. The relatively homogeneous land use/land cover categories throughout the Study Area associated with rural agricultural, forest and range management activities has an influence on the origin and pathways of pollutant sources to surface water. Bacteria originate from warm-blooded animals in rural, suburban, and urban areas. These sources include wildlife, various agricultural activities and domesticated animals, land application fields, urban runoff, failing OSD systems and domestic pets. Water quality data collected from streams draining urban communities often show existing concentrations of fecal coliform bacteria at levels greater than a state's water quality standards. A study under EPA's National Urban Runoff Project indicated that the average fecal coliform concentration from 14 watersheds in different areas within the United States was approximately 15,000/100 mL in stormwater runoff (EPA 1983). Runoff from urban areas not permitted under the MS4 program can be a significant source of fecal coliform bacteria. Water quality data collected from streams draining many of the non-permitted communities show a high level of fecal coliform bacteria.

Various potential nonpoint sources of TSS as indicated in the 2022 Integrated Report include sediments originating from grazing in riparian corridors of streams and creeks, highway/road/bridge runoff, non-irrigated crop production, rangeland grazing, petroleum/natural gas activities, on-site treatment systems, and other sources of sediment loading (DEQ 2022). Elevated turbidity measurements can be caused by stream bank erosion processes, stormwater runoff events and other channel disturbances.

The following sections provide general information on nonpoint sources contributing bacterial and/or TSS loading within the Study Area.

3.3.1 Wildlife

Fecal coliform bacteria are produced by all warm-blooded animals, including wildlife such as mammals and birds. In developing bacterial TMDLs it is important to identify the potential for bacterial contributions from wildlife by watershed. Wildlife is naturally attracted to riparian corridors of streams and rivers due to habitat and resource availability. With direct access to the stream channel, wildlife can be a concentrated source of bacterial loading to a waterbody. Fecal coliform bacteria from wildlife are also deposited onto land surfaces, where it may be washed into nearby streams by rainfall runoff. Currently there are insufficient data available to estimate populations of wildlife and avian species by watershed. Consequently, it is difficult to assess the magnitude of bacterial contributions from wildlife species as a general category.

However, adequate data are available by county to estimate the number of deer by watershed. This report assumes that deer habitat includes forests, croplands, and

pastures. Using Oklahoma Department of Wildlife and Conservation (ODWC) county data, the population of deer can be roughly estimated from the actual number of deer harvested and harvest rate estimates. Because harvest success varies from year to year based on weather and other factors, the average harvest from 2014 to 2020 was combined with an estimated annual harvest rate of 20% to predict deer population by county. Using the estimated deer population by county and the percentage of the watershed area within each county, a wild deer population can be calculated for each watershed.

According to a study conducted by the American Society of Agricultural Engineers (ASAE), deer release approximately 5×10^8 fecal coliform units per animal per day (ASAE 1999). Although only a fraction of the total fecal coliform loading produced by the deer population may actually enter a waterbody, the estimated fecal coliform production based on the estimated deer population provided in **Table 3-6** in counts/day provides a relative magnitude of loading in each of the TMDL watersheds impaired for bacteria.

Table 3-6 Estimated Population and Fecal Coliform Production for Deer

Waterbody ID	Waterbody Name	Watershed Area (acres)	Wild Deer Population	Estimated Wild Deer per Acre	Fecal Production of Deer Population (x 10^9 counts/day)
OK220100010010_00	Poteau River	92,117	906	0.010	453
OK220100020010_10	Poteau River	151,366	1,485	0.010	742
OK220600010100_20	Mill Creek	50,319	501	0.010	250
OK220600030010_00	Brushy Creek	19,111	346	0.018	173
OK220600040030_00	Beaver Creek	10,232	128	0.013	64
OK410210020150_00	Terrapin Creek	36,136	428	0.012	214
OK410400010010_20	Red River	3,451	53	0.015	26
OK410400020200_00	Caney Creek	20,160	407	0.020	204
OK410400080010_00	North Boggy Creek	77,592	1,486	0.019	743

3.3.2 Non-Permitted Agricultural Activities and Domesticated Animals

There are a number of non-permitted agricultural activities that can also be sources of bacterial or TSS loading. Agricultural activities of greatest concern are typically those associated with livestock operations (Drapcho and Hubbs 2002). Examples of commercially raised farm animal activities that can contribute to stream pollutants include:

- Processed commercially raised farm animal manure is often applied to fields as fertilizer, and can contribute to fecal bacterial loading to waterbodies if washed into streams by runoff.
- Animals grazing in pastures deposit manure containing fecal bacteria onto land surfaces. These bacteria may be washed into waterbodies by runoff.

- Animals often have direct access to waterbodies and can provide a concentrated source of fecal bacterial loading directly into streams or can cause unstable stream banks which can contribute TSS.

Table 3-10 provides estimated numbers of commercially raised farm animals and estimated acreage where manure was applied by watershed. This was calculated using the 2017 U.S. Department of Agriculture (USDA) county agricultural census data (USDA 2017) and the percentage of the watershed within each county. Because the watersheds are generally much smaller than the counties, and commercially raised farm animals are not evenly distributed across counties or constant with time, these are rough estimates only. According to **Table 3-10**, cattle are clearly the most abundant species of commercially raised farm animals in the Study Area and often have direct access to the waterbodies and their tributaries.

Detailed information is not available to describe or quantify the relationship between in-stream concentrations of bacteria and land application or direct deposition of manure from commercially raised farm animals. There is also not sufficient information available to describe or quantify the contributions of sediment loading caused by commercially raised farm animals responsible for destabilizing stream banks or erosion in pasture fields. Despite the lack of specific data, for the purpose of these TMDLs, land application of commercially raised farm animal manure is considered a potential source of bacterial loading to the watersheds in the Study Area. **Table 3-7** gives the daily fecal coliform production rates by animal species:

Table 3-7 Daily Fecal Coliform Production Rates by Animal Species

Animal	Daily Fecal Coliform Production Rate (counts per animal per day)
Beef cattle*	1.04E+11
Dairy cattle*	1.01E+11
Horses*	4.20E+08
Goats	1.20E+10
Sheep*	1.20E+10
Swine*	1.08E+10
Ducks*	2.43E+09
Geese*	4.90E+10
Chickens*	1.36E+08
Turkey*	9.30E+07
Deer*	5x10 ⁸
Dogs*	3.3x10 ⁹
Cats*	5.4x10 ⁸
* According to a livestock study conducted by the ASAE (1999)	
* Schueler 2000	

Using the estimated animal populations and the fecal coliform production rates from **Table 3-7**, an estimate of fecal coliform production from each group of commercially raised farm animal was calculated in each watershed of the Study Area. These estimates are presented in **Table 3-11**. Note that only a small fraction

of these fecal coliform are expected to represent loading into waterbodies, either washed into streams by runoff or by direct deposition from wading animals. Because of their numbers, cattle again appear to represent the most likely commercially raised farm animal source of fecal bacteria.

3.3.3 Domestic Pets

Fecal matter from dogs and cats, which can be transported to streams by runoff from urban and suburban areas, is a potential source of bacterial loading. On average 36.5% of the nation's households own dogs and 30.4% own cats. In 2012, the average number of pets per household was 1.6 dogs and 2.1 cats (American Veterinary Medical Association 2012). Using the U.S. Census data at the block level (U.S. Census Bureau 2020), dog and cat populations can be estimated for each watershed. **Table 3-8** summarizes the estimated number of dogs and cats for the watersheds of the Study Area.

Table 3-8 Estimated Numbers of Pets

Waterbody ID	Waterbody Name	Dogs	Cats
OK220100010010_00	Poteau River	1,101	1,204
OK220100020010_10	Poteau River	1,806	1,975
OK220600010100_20	Mill Creek	712	778
OK220600030010_00	Brushy Creek	279	305
OK220600040030_00	Beaver Creek	60	65
OK410210020150_00	Terrapin Creek	194	212
OK410400010010_20	Red River	28	30
OK410400020200_00	Caney Creek	111	122
OK410400080010_00	North Boggy Creek	784	857

Table 3-9 provides an estimate of the fecal coliform production from pets. These estimates are based on estimated fecal coliform production rates from **Table 3-7**.

Table 3-9 Estimated Fecal Coliform Daily Production by Pets
(x10⁹ counts/day)

Waterbody ID	Waterbody Name	Dogs	Cats	Total
OK220100010010_00	Poteau River	3,634	650	4,284
OK220100020010_10	Poteau River	5,961	1,066	7,027
OK220600010100_20	Mill Creek	2,350	420	2,770
OK220600030010_00	Brushy Creek	920	165	1,085
OK220600040030_00	Beaver Creek	197	35	233
OK410210020150_00	Terrapin Creek	641	115	755

Waterbody ID	Waterbody Name	Dogs	Cats	Total
OK410400010010_20	Red River	92	16	108
OK410400020200_00	Caney Creek	367	66	432
OK410400080010_00	North Boggy Creek	2,587	463	3,050

Table 3-10 Commercially Raised Farm Animals and Manure Application Area Estimates by Watershed

Waterbody ID	Waterbody Name	Cattle	Dairy Cows	Horses	Goats	Sheep	Hogs & Pigs	Ducks & Geese	Acres of Manure Application
OK220100010010_00	Poteau River	6,766	5	209	151	35	246	17	2,375
OK220100020010_10	Poteau River	11,114	7	342	248	58	404	28	3,906
OK220600010100_20	Mill Creek	5,336	1	173	72	43	2,482	19	486
OK220600030010_00	Brushy Creek	1,848	7	49	32	4	6	8	105
OK220600040030_00	Beaver Creek	926	1	22	23	9	6	7	51
OK410210020150_00	Terrapin Creek	1,843	0	66	56	6	10	11	418
OK410400010010_20	Red River	498	0	15	1	2	1	0	47
OK410400020200_00	Caney Creek	2,191	1	36	45	69	5	11	87
OK410400080010_00	North Boggy Creek	7,964	16	169	152	140	21	38	382

Table 3-11 Fecal Coliform Production Estimates for Commercially Raised Farm Animals (x10⁹ counts/day)

Waterbody ID	Waterbody Name	Cattle	Dairy Cows	Horses	Goats	Sheep	Hogs & Pigs	Ducks & Geese	Total
OK220100010010_00	Poteau River	703,664	505	88	1,812	420	2,657	181	709,327
OK220100020010_10	Poteau River	1,155,856	707	144	2,976	696	4,363	301	1,165,043
OK220600010100_20	Mill Creek	554,944	101	73	864	516	26,806	46	583,349
OK220600030010_00	Brushy Creek	192,192	707	21	384	48	65	113	193,529
OK220600040030_00	Beaver Creek	96,304	101	9	276	108	65	64	96,927
OK410210020150_00	Terrapin Creek	191,672	0	28	672	72	108	120	192,672
OK410400010010_20	Red River	51,792	0	6	12	24	11	0	51,845
OK410400020200_00	Caney Creek	227,864	101	15	540	828	54	27	229,429
OK410400080010_00	North Boggy Creek	828,256	1,616	71	1,824	1,680	227	279	833,952

3.3.4 Failing Onsite Wastewater Disposal Systems and Illicit Discharges

DEQ is responsible for implementing the regulations of Title 252, Chapter 641 of the Oklahoma Administrative Code, which defines design standards for individual and small public onsite sewage disposal systems (DEQ 2021). OSD systems and illicit discharges can be a source of bacterial loading to streams and rivers. Bacterial loading from failing OSD systems can be transported to streams in a variety of ways, including runoff from surface ponding or through groundwater. Fecal coliform-contaminated groundwater may discharge to creeks through springs and seeps.

To estimate the potential magnitude of OSDs fecal bacterial loading, the number of OSD systems was estimated for each watershed. The estimate of OSD systems was derived by using data from the 1990 U.S. Census which was the last year in which there were Census questions about plumbing facilities (U.S. Department of Commerce, Bureau of the Census 1990). The density of OSD systems within each watershed was estimated by dividing the number of OSD systems in each census block by the number of acres in each census block. This density was then applied to the number of acres of each census block within a WQM station watershed. Census blocks crossing a watershed boundary required additional calculation to estimate the number of OSD systems based on the proportion of the census block falling within each watershed. This step involved adding all OSD systems for each whole or partial census block.

Over time, most OSD systems operating at full capacity will fail. OSD system failures are proportional to the adequacy of a state's minimum design criteria (Hall 2002). The 1990 American Housing Survey for Oklahoma conducted by the U.S. Census Bureau estimates that, nationwide, 10% of occupied homes with OSD systems experience malfunctions during the year (U.S. Department of Commerce, Bureau of the Census 1990). A study conducted by Reed, Stowe & Yanke, LLC (2001) reported that approximately 12% of the OSD systems in east Texas and 8% in the Texas Panhandle were chronically malfunctioning. Most studies estimate that the minimum lot size necessary to ensure against contamination is roughly one-half to one acre (Hall 2002). Some studies, however, found that lot sizes in this range or even larger could still cause contamination of ground or surface water (University of Florida 1987). It is estimated that areas with more than 40 OSD systems per square mile (6.25 septic systems per 100 acres) can be considered to have potential contamination problems (Canter and Knox 1984). **Table 3-12** summarizes estimates of sewer and unsewered households and the average number of septic tanks per square mile for each watershed in the Study Area.

For the purpose of estimating fecal coliform loading in watersheds, an OSD failure rate of 12% was used in the calculations made to characterize fecal coliform loads in each watershed.

Fecal coliform loads were estimated using the following equation (EPA 2001):

$$\# \frac{\text{counts}}{\text{day}} = (\# \text{ Failing_systems}) \times \left(\frac{10^6 \text{ counts}}{100 \text{ ml}} \right) \times \left(\frac{70 \text{ gal}}{\text{person day}} \right) \times \left(\# \frac{\text{person}}{\text{household}} \right) \times \left(3785.2 \frac{\text{ml}}{\text{gal}} \right)$$

Table 3-12 Estimates of Sewered and Unsewered Households

Waterbody ID	Waterbody Name	Public Sewer	Septic Tank	Other Means	Housing Units	# of Septic Tanks / Mile ²
OK220100010010_00	Poteau River	801	796	19	1,616	5.5
OK220100020010_10	Poteau River	1,315	1,305	31	2,651	5.5
OK220600010100_20	Mill Creek	326	765	27	1,118	9.7
OK220600030010_00	Brushy Creek	247	167	6	420	5.6
OK220600040030_00	Beaver Creek	39	53	2	94	3.3
OK410210020150_00	Terrapin Creek	119	189	16	324	3.3
OK410400010010_20	Red River	24	21	1	46	3.9
OK410400020200_00	Caney Creek	59	99	5	163	3.1
OK410400080010_00	North Boggy Creek	620	531	22	1,173	4.4

The average number of people per household was calculated to be from 1.7 to 2.4 for counties in the Study Area (U.S. Census Bureau 2020). Approximately 70 gallons of wastewater were estimated to be produced on average per person per day (Metcalf and Eddy 1991). The fecal coliform concentration in septic tank effluent was estimated to be 10⁶ per 100 mL of effluent based on reported concentrations from a number of publications (Metcalf and Eddy 1991; Canter and Knox 1984; Cogger and Carlile 1984). Using this information, the estimated load from failing septic systems within the watersheds was summarized in **Table 3-13**.

Table 3-13 Estimated Fecal Coliform Load from OSD Systems

Waterbody ID	Waterbody Name	Acres	Septic Tank	# of Failing Septic Tanks	Estimated Loads from Septic Tanks (x 10 ⁹ counts/day)
OK220100010010_00	Poteau River	92,117	796	95	579
OK220100020010_10	Poteau River	151,366	1,305	157	949
OK220600010100_20	Mill Creek	50,319	765	92	410
OK220600030010_00	Brushy Creek	19,111	167	20	106

Waterbody ID	Waterbody Name	Acres	Septic Tank	# of Failing Septic Tanks	Estimated Loads from Septic Tanks (x 10 ⁹ counts/day)
OK220600040030_00	Beaver Creek	10,232	53	6	36
OK410210020150_00	Terrapin Creek	36,136	189	23	125
OK410400010010_20	Red River	3,451	21	3	14
OK410400020200_00	Caney Creek	20,160	99	12	74
OK410400080010_00	North Boggy Creek	77,952	531	64	367

3.4 Summary of Sources of Impairment

3.4.1 Bacteria

Both Poteau River segments (OK220100010010_00 and OK220100020010_10) have four continuous point source dischargers (two each) that may contribute bacteria. These point sources have numerous SSOs that contribute to bacterial loadings. There are no CAFOs or SFOs in the Study Area. In the Poteau River segment watersheds, there are 66 PFOs which could possibly contribute bacterial loading into their watersheds. But PFOs are not allowed to discharge or allow the runoff of animal waste so they are not considered to be major sources of bacteria as long as they are in compliance with their Nutrient Management Plans and Animal Waste Management Plans as outlined in the ODAFF PFO Rules. Therefore, in the Poteau River segment watersheds, the various point and nonpoint sources are considered to be the major source of bacterial loadings.

Table 3-14 provides a summary of the estimated percentage of fecal coliform loads in counts/day from the four major nonpoint source categories (commercially raised farm animals, pets, deer, and septic tanks) that contribute to the elevated bacterial concentrations in each bacterial TMDL watershed. Because of their numbers and animal unit production of bacteria, livestock are estimated to be the largest contributors of fecal coliform loading to land surfaces. It must be noted that while no data are available to estimate populations and fecal loading of wildlife other than deer, a number of bacterial source tracking studies around the nation demonstrate that wild birds and mammals represent a major source of the fecal bacteria found in streams.

Table 3-14 Percentage Contribution of Fecal Coliform Load Estimates from Nonpoint Sources to Land Surfaces

Waterbody ID	Waterbody Name	Commercially Raised Farm Animals	Pets	Deer	Estimated Loads from Septic Tanks
OK220100010010_00	Poteau River	99.26	0.60	0.06	0.08
OK220100020010_10	Poteau River	99.26	0.60	0.06	0.08

The magnitude of loading to a stream may not reflect the magnitude of loading to land surfaces. While no studies have quantified these effects, bacteria may die off or survive at different rates depending on the manure characteristics and a number of other environmental conditions. Also, the structural properties of some manure, such as cow patties, may limit their washoff into streams by runoff. In contrast, malfunctioning septic tank effluent may be present in standing water on the surface, or in shallow groundwater, which may enhance its conveyance to streams.

3.4.2 Turbidity

Eight waterbodies in the Study Area are impaired for turbidity (**Table 2-5**). The Poteau River segment (OK220100010010_00) had the turbidity TMDL completed in a previous TMDL report, and therefore will not be repeated in this report. There are no permitted sources of TSS that will necessitate a WLA. Therefore, nonsupport of WWAC or CWAC uses in these turbidity impaired watersheds are likely caused primarily by nonpoint sources of TSS. Sediment loading of streams can originate from natural erosion processes, including the weathering of soil, rocks, and uncultivated land; geological abrasion; and other natural phenomena. There is insufficient data available to quantify contributions of TSS from these natural processes. TSS or sediment loading can also occur under non-runoff conditions as a result of anthropogenic activities in riparian corridors which cause erosive conditions. Given the lack of data to establish the background conditions for TSS/turbidity, separating background loading from nonpoint sources whether it is from natural or anthropogenic processes is not feasible in this TMDL development.

SECTION 4 TECHNICAL APPROACH AND METHODS

4.1 Pollutant Loads and TMDLs

The objective of a TMDL is to estimate allowable pollutant loads and to allocate these loads to the known pollutant sources in the watershed so appropriate control measures can be implemented and the WQS achieved. A TMDL is expressed as the sum of three elements (WLA, LA, and MOS) as described in the following mathematical equation:

$$TMDL = WLA_{WWTF} + WLA_{MS4} + WLA_{Growth} + LA + MOS$$

The WLA is the portion of the TMDL allocated to existing and future point sources. The LA is the portion of the TMDL allocated to nonpoint sources, including natural background sources. The MOS is intended to ensure that WQSs will be met.

For *E. coli* or Enterococci bacteria, TMDLs are expressed as colony-forming units per day, and represent the maximum one-day load the stream can assimilate while still attaining the WQS. Percent reduction goals are also calculated to aid in characterizing the possible magnitude of the effort to restore the segment to meeting water quality criterion. Turbidity TMDLs will be derived from TSS calculations and expressed in pounds (lbs) per day which will represent the maximum one-day load the stream can assimilate while still attaining the WQS, as well as a PRG.

4.2 Determine a Surrogate Target for Turbidity

Turbidity is a commonly measured indicator of the suspended solids load in streams. However, turbidity is an optical property of water, which measures scattering of light by suspended solids and colloidal matter. To develop TMDLs, a gravimetric (mass-based) measure of solids loading is required to express loads. There is often a strong relationship between the total suspended solids concentration and turbidity. Therefore, the TSS load, which is expressed as mass per time, is used as a surrogate for turbidity. To determine the relationship between turbidity and TSS, a linear regression between TSS and turbidity was developed using data collected from 1998-2021 at stations within the Study Area.

4.2.1 Steps Prior to Regression

Prior to developing the regression, the following steps are taken to refine the dataset:

- Remove data collected under high flow conditions exceeding the base-flow criterion. This means that measurements corresponding to flow exceedance percentiles lower than 25th are not to be used in the regression,
- Check rainfall data on the day when samples were collected and on the previous two days if stream conditions were not available. If there was a significant rainfall event (≥ 1.0 inch) in any of these days, the sample is excluded from regression analysis with one exception. If the significant rainfall happened on the sampling day and the turbidity reading was less

than 25 NTUs (half of turbidity standard for streams), the sample will not be excluded from analysis because most likely the rainfall occurred after the sample was taken,

- Check the non-detect rate. Non-detects (censored data) are TSS sample observations less than the detection limit (10 mg/L). If the percent of non-detects is $\leq 15\%$, follow the steps outlined in Section 4.2.2. If the percent of non-detects is $> 15\%$, follow the steps outlined in Section 4.2.3.

4.2.2 Non-Detect Rate Less Than or Equal to ($\leq$) 15%

For observed data where the non-detect rate is less than or equal to ($\leq$) 15%, [EPA \(2006\)](#) recommends using substitution. When ordinary least squares (OLS) regression is applied to ascertain the best relationship between two variables (i.e., X and Y), one variable (Y) is considered “dependent” on the other variable (X), but X must be considered “independent” of the other, and known without measurement error. OLS minimizes the differences, or residuals, between measured Y values and Y values predicted based on the X variable.

For current purposes, a relationship is necessary to predict TSS concentrations from measured turbidity values, but also to translate the TSS-based TMDL back to in-stream turbidity values. For this purpose, an alternate regression fitting procedure known as the line of organic correlation (LOC) was applied. To apply LOC, TSS samples of less than 10 were replaced with 9.99 and then both turbidity and TSS data were log-transformed to minimize effects of their non-linear data distribution. The LOC has three advantages over OLS (Helsel and Hirsch 2002):

- LOC minimizes fitted residuals in both the X and Y directions
- It provides a unique best-fit line regardless of which parameter is used as the independent variable
- Regression-fitted values have the same variance as the original data

The LOC minimizes the areas of the right triangles formed by horizontal and vertical lines drawn from observations to the fitted line. The slope of the LOC line equals the geometric mean of the Y on X (TSS on turbidity) and X on Y (turbidity on TSS) OLS slopes, and is calculated as:

$$m1 = \sqrt{m \cdot m'} = \text{sign}[r] \cdot \frac{s_y}{s_x}$$

$m1$ is the slope of the LOC line

m is the TSS on turbidity OLS slope

m' is the turbidity on TSS OLS slope

r is the TSS-turbidity correlation coefficient

s_y is the standard deviation of the TSS measurements


s_x is the standard deviation of the turbidity measurements

The r can range from -1 to 1 with 0 indicating no correlation, and negative r indicating an inverse correlation. Correlation values of 0 to 0.5 indicate a weaker correlation whereas values greater than 0.5 indicate a strong correlation. As a result, correlations of approximately 0.5 or greater are commonly used in TMDL studies (Christensen, Jian, and Ziegler; 2000). This Study considered an R-square (R^2 or coefficient of determination) value of approximately 0.5 or greater to represent a satisfactory relationship between turbidity and TSS, if based on at least 10 observations.

The intercept of the LOC (b_1) is subsequently found by fitting the line with the LOC slope through the point (mean turbidity, mean TSS). **Figure 4-1** shows an example of the correlation between TSS and turbidity, along with the LOC and the OLS lines.

The NRMSE and R-square (r^2) were used as the primary measures of goodness-of-fit. As shown in **Figure 4-1**, the LOC yields a NRMSE value of 10.8% which means the root mean square error (RMSE) is 10.8% of the average of the measured TSS values. The R-square (R^2) value indicates the fraction of the total variance in TSS or turbidity observations that is explained by the LOC. The regression equation can be used to convert the turbidity standard of 50 NTUs to TSS goals.

Figure 4-1 Linear Regression for TSS-Turbidity for the Red River (OK410400010010_20)

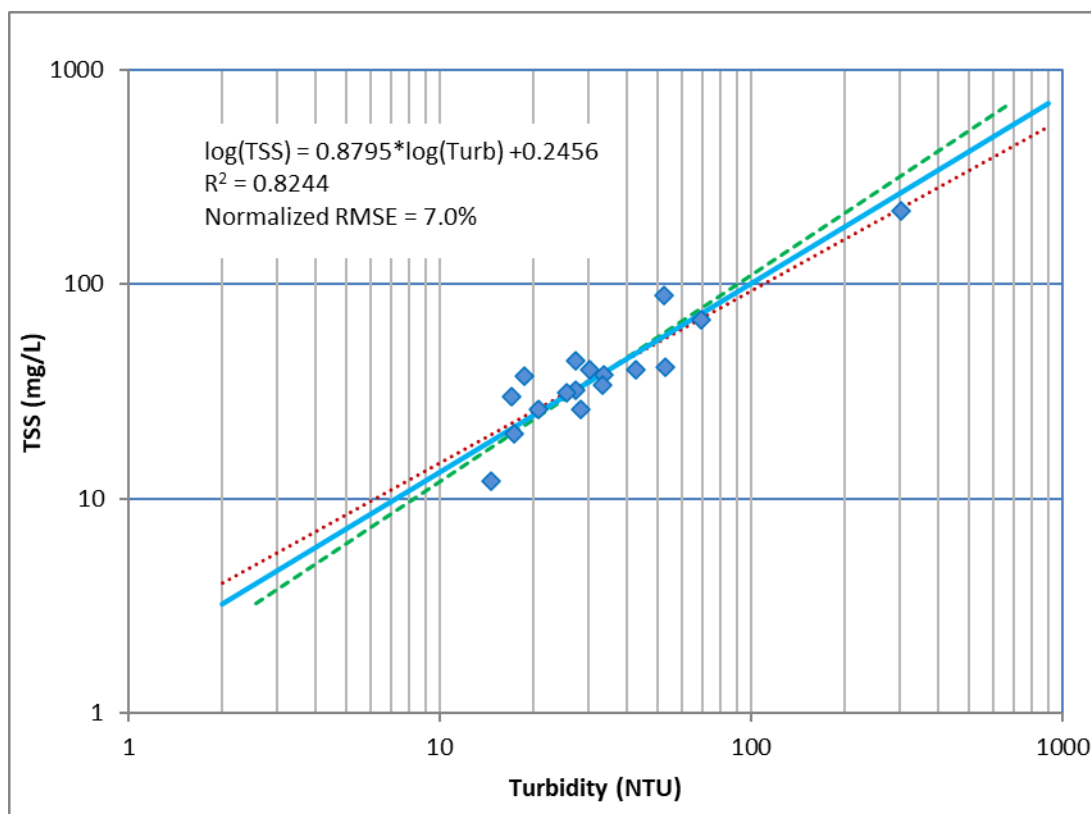

It was noted that there were a few outliers that exerted undue influence on the regression relationship. These outliers were identified by applying the Tukey's Boxplot method (Tukey 1977) to the dataset of the distances from observed points to the regression line. The Tukey Method is based on the interquartile range (IQR), the difference between the 75th percentile (Q_3) and 25th percentile (Q_1) of distances between observed points and the LOC. Using the Tukey method, any point with an error greater than $Q_3 + 1.5 * IQR$ or less than $Q_1 - 1.5 * IQR$ was identified as an outlier and removed from the regression dataset. The above regressions were calculated using the dataset with outliers removed.

The Tukey Method is equivalent to using three times the standard deviation to identify outliers if the residuals (observed - predicted) follow a normal distribution. The probability of sampling results being within three standard deviations of the mean is 99.73% while the probability for the Tukey Method is 99.65%. If three times the standard deviation is used to identify outliers, it is necessary to first confirm that the residuals are indeed normally distributed. This is difficult to do because of the size limitations of the existing turbidity and TSS dataset. Tukey's method does not rely on any assumption about the distribution of the residuals. It can be used regardless of the shape of distribution.

Outliers were removed from the dataset only for calculating the turbidity-TSS relationship, not from the dataset used to develop the TMDL.

4.2.3 Non-Detect Rate is Greater Than 15%

For observed data where the non-detect rate is greater than 15%, follow these steps:


- If the number of samples is less than 25 (Helsel and Hirsch, 2002; p. 360), combine sample data based on their ecoregion, geological area, and beneficial use.
- Log-transform both turbidity and TSS data to minimize effects of their non-linear data distributions.
- Use methods for estimating summary statistics of data which include non-detects: simple substitution, distributional, and robust methods (Helsel and Hirsch, 2002).
- Compare results for the mean and the variance for desirable methods. Extrapolated values are not considered as estimates for specific samples, but only used collectively to estimate summary statistics.
- Choose regression methods for data-sets containing non-detects depend on distribution of data. If the data are linear and normally distributed without outliers, parametric methods may be used. Non-parametric methods may be used regardless of whether or not they are linear (Huston and Juarez-Colunga, 2009).
- Use statistical software (such as Excel, JMP, R, Minitab, or SAS) to calculate the turbidity-TSS relationship. Then, the TSS goal is computed based on regression coefficients.

- Replace less-thans with their detection limits for percentage reduction goal (PRG) calculation. Detection limit substitution may not be the best estimation method, but it is the best conservative method for calculating PRG.

If a small proportion of the observations are not detected, these may be substituted with a value (EPA 2006), the detection limit (dl) in this study. However, substituting for non-detects may incorrectly alter the mean and the variance (Appendix D). Therefore, censored data regression was issued for the data set of censoring greater than 15%. Before determining the relationship between turbidity and TSS, censored data were set as a range from one (TSS=1¹ mg/L) to detection limit (TSS=10 mg/L). Then, turbidity and TSS data were log-transformed and statistical software R determined regression relationships.

With statistical software R, maximum likelihood estimation (MLE) or non-parametric approaches can estimate correlation and regression coefficients as shown in **Figure 4-2**. If extreme outliers were not present in the sample data and the distributions of points were close to trend line (Appendix E), parametric method (MLE) performed similar or slightly better than non-parametric method (Kendall's tau).

Figure 4-2 Regression Estimates by Parametric and Non-parametric Method

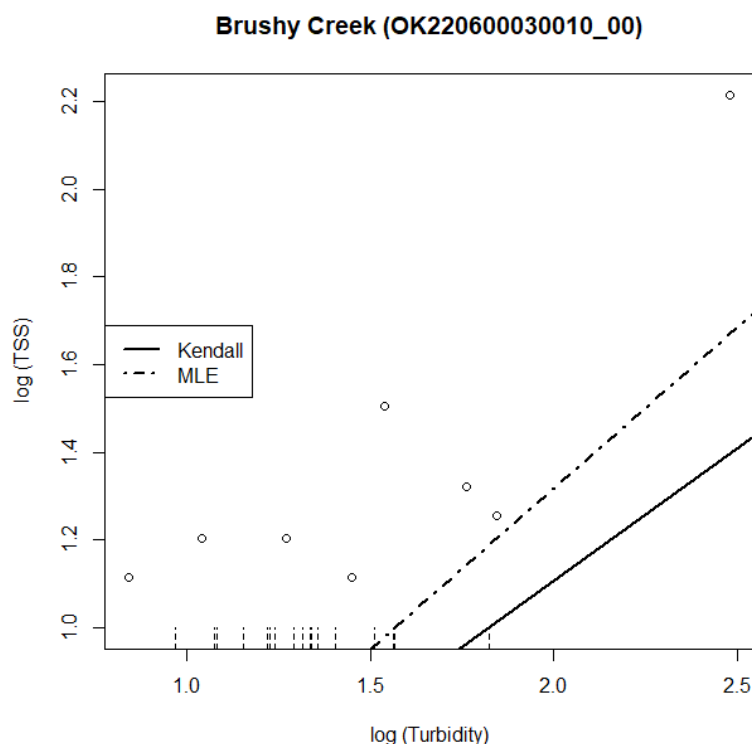

¹ Having a TSS of "0" would be almost impossible because there is always some sediment in the background. Consequently, "1" is used as the lowest amount of TSS.

After computing TSS goal with estimated regression, censored data were replaced with their detection limit (dl). This simple substitution is the most conservative to calculate PRG among estimation methods for censored data. Then, NRMSE and R-square (R^2) were computed as:

$$RMSE = (\text{Standard Error of Slope}) \cdot \sqrt{\sum_{i=1}^n (x_i - \bar{x})^2}$$

$$NRMSE = \frac{RMSE}{\bar{y}}$$

$$R^2 = 1 - \left[\frac{\exp(\loglik_{intercept})}{\exp(\loglik_{model})} \right]^{\frac{2}{n}}$$

Where: $x_i = \log(\text{turbidity})_i$, $y_i = \log(\text{TSS})_i$, $i = 1 \dots n$, $\bar{x}$ = average of x_i , $\bar{y}$ = average of y_i , and n = number of observations.

The regression between TSS and turbidity and statistics for each turbidity impaired stream segment is provided in Section 5-1.

4.3 Steps to Calculating TMDLs

The TMDL calculations presented in this report are derived from load duration curves (LDC). LDCs facilitate rapid development of TMDLs, and as a TMDL development tool can help identify whether impairments are associated with point or nonpoint sources. The technical approach for using LDCs for TMDL development includes the following steps that are described in Subsections 4.3:

1. Prepare flow duration curves for gaged and ungaged WQM stations.
2. Estimate existing loading in the waterbody using ambient bacterial water quality data.
3. Estimate loading in the waterbody using measured TSS water quality data and turbidity-converted data.
4. Use LDCs to identify if there is a critical condition.

Historically, in developing WLAs for pollutants from point sources, it was customary to designate a critical low flow condition (*e.g.*, 7Q2) at which the maximum permissible loading was calculated. As water quality management efforts expanded in scope to quantitatively address nonpoint sources of pollution and types of pollutants, it became clear that this single critical low flow condition was inadequate to ensure adequate water quality across a range of flow conditions. Use of the LDC obviates the need to determine a design storm or selected flow recurrence interval with which to characterize the appropriate flow level for the assessment of critical conditions. For waterbodies impacted by both point and nonpoint sources, the “nonpoint source critical condition” would typically occur during high flows, when rainfall runoff would contribute the bulk of the pollutant load, while the “point source critical condition” would typically occur during low flows, when WWTF

effluents would dominate the base flow of the impaired water. However, flow range is only a general indicator of the relative proportion of point/nonpoint contributions. It is not used in this report to quantify point source or nonpoint source contributions. Violations that occur during low flows may not be caused exclusively by point sources. Violations during low flows have been noted in some watersheds that contain no point sources.

LDCs display the maximum allowable load over the complete range of flow conditions by a line using the calculation of flow multiplied by a water quality criterion. The TMDL can be expressed as a continuous function of flow, equal to the line, or as a discrete value derived from a specific flow condition.

4.3.1 Development of Flow Duration Curves

Flow duration curves (FDC) serve as the foundation of LDCs and are graphical representations of the flow characteristics of a stream at a given site. Flow duration curves utilize the historical hydrologic record from stream gages to forecast future recurrence frequencies. Many WQM stations throughout Oklahoma do not have long-term flow data and therefore, flow frequencies must be estimated. Eight of the ten waterbodies in the Study Area do not have USGS gage stations. The default approach used to develop flow frequencies necessary to establish flow duration curves considers watershed differences in rainfall, land use, and the hydrologic properties of soil that govern runoff and retention. A detailed explanation of the methods for estimating flow for ungaged streams is provided in **Appendix C**.

To estimate flows at an ungaged site:

- Identify an upstream or downstream flow gage.
- Calculate the contributing drainage areas of the ungaged sites and the flow gage.
- Calculate daily flows at the ungaged site by using the flow at the gaged site multiplied by the drainage area ratio.

Flow duration curves are a type of cumulative distribution function. The flow duration curve represents the fraction of flow observations that exceed a given flow at the site of interest. The observed flow values are first ranked from highest to lowest, then, for each observation, the percentage of observations exceeding that flow is calculated. The flow value is read from the ordinate (y-axis), which is typically on a logarithmic scale since the high flows would otherwise overwhelm the low flows. The flow exceedance frequency is read from the abscissa (x-axis), which is numbered from 0% to 100%, and may or may not be logarithmic. The lowest measured flow occurs at an exceedance frequency of 100% indicating that flow has equaled or exceeded this value 100% of the time, while the highest measured flow is found at an exceedance frequency of 0%. The median flow occurs at a flow exceedance frequency of 50%. The flow exceedance percentiles for each waterbody addressed in this report are provided in **Appendix Table C-1**.


Some instantaneous flow measurements were available from various agencies. These were not combined with the daily average flows or used in calculating flow percentiles, but were matched turbidity, or TSS grab measurements collected at the

same site and time. When available, these instantaneous flow measurements were used in lieu of projected flows to calculate pollutant loads.

A typical semi-log flow duration curve exhibits a sigmoidal shape, bending upward near a flow exceedance frequency value of 0% and downward at a frequency near 100%, often with a relatively constant slope in between. For sites that on occasion exhibit no flow, the curve will intersect the abscissa at a frequency less than 100%. As the number of observations at a site increases, the line of the LDC tends to appear smoother. However, at extreme low and high flow values, flow duration curves may exhibit a “stair step” effect due to the USGS flow data rounding conventions near the limits of quantization. An example of a typical flow duration curve is shown in **Figure 4-3**.

Flow duration curves for each impaired waterbody in the Study Area are provided in Section 5.2.

**Figure 4-3 Flow Duration Curve for the Red River
(OK410400010010_20)**

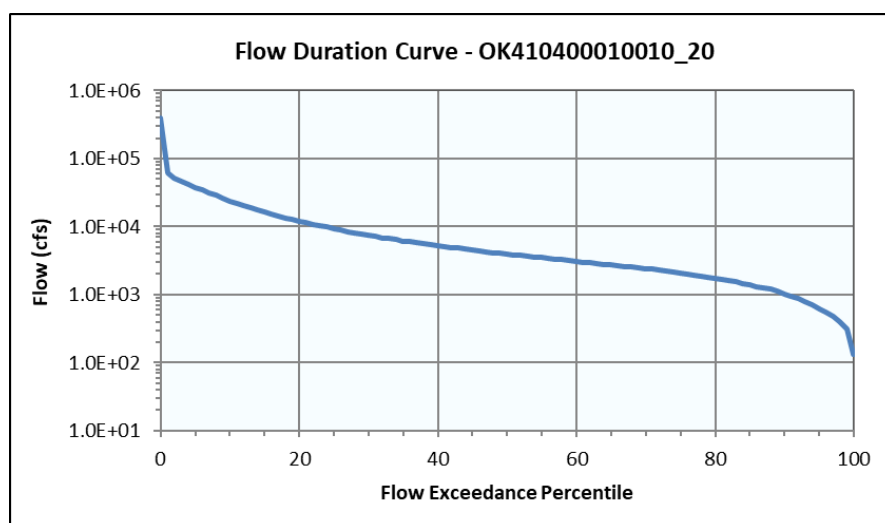

4.3.2 Using Flow Duration Curves to Calculate Load Duration Curves

4.3.2.1 Bacteria

Existing in-stream loads can be calculated using FDCs. For bacteria:

- Calculate the geometric mean of all water quality observations from the period of record selected for the waterbody.
- Convert the geometric mean concentration value to loads by multiplying the flow duration curve by the geometric mean of the ambient water quality data for each bacterial indicator.

4.3.2.2 TSS

- Match the water quality observations with the flow data from the same date.
- Convert measured concentration values to loads by multiplying the flow at the time the sample was collected by the water quality parameter concentration (for sampling events with both TSS and turbidity data, the measured TSS value is used; if only turbidity was measured, the value was converted to TSS using the regression equations described); or multiplying the flow by the bacterial indicator concentration to calculate daily loads.

4.3.3 Using Load Duration Curves to Develop TMDLs

The final step in the TMDL calculation process involves a group of additional computations derived from the preparation of LDCs. These computations are necessary to derive a PRG (which is one method of presenting how much pollutant loads must be reduced to meet WQs in the impaired watershed).

4.3.3.1 Step 1 - Generate LDCs

LDCs are similar in appearance to flow duration curves.

For bacteria, the ordinate is expressed in terms of a bacterial load in colonies/day. The bacterial curve represents the geometric mean water quality criterion for *E. coli* or Enterococci bacteria expressed in terms of a load through multiplication by the continuum of flows historically observed at the site. Bacterial TMDLs are not easily expressed in mass per day. The equation in Section 4.3.3.1.1 calculates a load in the units of colonies per day. The colonies are a total for the day at a specific flow for bacteria, which is the best equivalent to a mass per day of a pollutant such as sulfate. Expressing bacterial TMDLs as colonies per day is consistent with EPA's *Protocol for Developing Pathogen TMDLs* (EPA 2001).

For TSS, the ordinate is expressed in terms of a load in lbs/day. The curve represents the water quality target for TSS from **Table 5-2** expressed in terms of a load obtained through multiplication of the TSS goal by the continuum of flows historically observed at the site.

The following are the basic steps in developing an LDC:

1. Obtain daily flow data for the site of interest from the USGS.
2. Sort the flow data and calculate flow exceedance percentiles.

3. For bacteria, obtain water quality data for the primary contact recreation season (May 1 through September 30).
4. Obtain available turbidity and TSS water quality data.
5. Display a curve on a plot that represents the allowable load determined by multiplying the actual or estimated flow by the WQS numerical criterion for each parameter (geometric mean standard for bacteria and TSS goal for turbidity).
6. For bacterial TMDLs, display another curve derived by plotting the geometric mean of all existing bacterial samples continuously along the full spectrum of flow exceedance percentiles which represents the LDC (See SECTION 5).
7. For turbidity TMDLs, match the water quality observations with the flow data from the same date and determine the corresponding exceedance percentile (See SECTION 5).

The flow exceedance frequency (x-value of each point) is obtained by looking up the historical exceedance frequency of the measured or estimated flow, in other words, the percent of historical observations that are equal to or exceed the measured or estimated flow.

As noted earlier, runoff has a strong influence on loading of nonpoint pollution. Flows do not always correspond directly to runoff. High flows may occur in dry weather (e.g., lake release to provide water downstream) and runoff influence may be observed with low or moderate flows (e.g., persistent high turbidity due to previous storm).

4.3.3.1.1 Bacterial LDC

For bacterial TMDLs, the culmination of these steps is expressed in the following formula which is displayed on the LDC as the TMDL curve:

$$\textbf{TMDL (colonies/day) = WQS * flow (cfs) * unit conversion factor}$$

Where:

$$\textbf{WQS = 126 colonies/100 mL (E. coli); or 33 colonies/100 mL (Enterococci)}$$

$$\textbf{Unit conversion factor = 24,465,525}$$

Historical observations of bacteria were plotted as a separate LDC based on the geometric mean of all samples. It is noted that the LDCs for bacteria were based on the geometric mean standards or geometric mean of all samples. It is inappropriate to compare single

sample bacterial observations to a geometric mean water quality criterion in the LDC; therefore individual bacterial samples are not plotted on the LDCs.

4.3.3.1.2 Turbidity LDC

For turbidity (TSS) TMDLs, the culmination of these steps is expressed in the following formula which is displayed on the LDC as the TMDL curve:

$$\text{TMDL (lb/day)} = WQ_{\text{goal}} * \text{flow (cfs)} * \text{unit conversion factor}$$

Where:

WQ_{goal} = waterbody specific TSS concentration derived from regression analysis results presented in Table 5-2

Unit conversion factor = 5.39377

Historical observations of TSS and/or turbidity concentrations are paired with flow data and are plotted on the LDC for a stream. TSS loads representing exceedance of water quality criteria fall above the TMDL line.

4.3.3.2 Step 2 - Define MOS

The MOS may be defined explicitly or implicitly. A typical explicit approach would reserve some specific fraction of the TMDL as the MOS. In an implicit approach, conservative assumptions used in developing the TMDL are relied upon to provide an MOS to assure that WQs are attained. For bacterial TMDLs in this report, an explicit MOS of 10% was selected. The 10% MOS has been used in other approved bacterial TMDLs.

For turbidity (TSS) TMDLs an explicit MOS is derived from the NRMSE established by the turbidity/TSS regression analysis conducted for each waterbody. This approach for setting an explicit MOS has been used in other approved turbidity TMDLs. MOS is set to be the next percentile (count by 5%) greater than the NRMSE. For example, for any NRMSE greater than 10% but less than 15%, MOS will be 15%.

4.3.3.3 Step 3 - Calculate WLA

As previously stated, the pollutant load allocation for point sources is defined by the WLA. For bacterial TMDLs a point source can be either a wastewater (continuous) or stormwater (MS4) discharge. Stormwater point sources are typically associated with urban and industrialized areas. Recent EPA guidance includes OPDES-permitted stormwater discharges as point source discharges and, therefore, part of the WLA.

For TMDL development purposes when addressing turbidity or TSS, a WLA will be established for wastewater (continuous) discharges in

impaired watersheds that do not have a BOD or CBOD permit limit but do have a TSS limit. These point source discharges of inorganic suspended solids will be assigned a TSS WLA as part of turbidity TMDLs to ensure WQS can be maintained. As discussed in Section 3.1, a WLA for TSS is not necessary for MS4s.

The LDC approach recognizes that the assimilative capacity of a waterbody depends on the flow, and that maximum allowable loading will vary with flow condition. WLAs can be expressed in terms of a single load, or as different loads allowable under different flows. WLAs may be set to zero in cases of watersheds with no existing or planned continuous permitted point sources. For turbidity (TSS) TMDLs a load-based approach also meets the requirements of 40 CFR § Part 130.2(i) for expressing TMDLs “in terms of mass per time, toxicity, or other appropriate measures.”

WLA for WWTF

For watersheds with permitted point sources discharging the pollutant of concern, OPDES permit limits are used to derive WLAs for evaluation as appropriate for use in the TMDL. The permitted flow rate used for each point source discharge and the water quality concentration defined in a permit are used to estimate the WLA for each wastewater facility. In cases where a permitted flow rate is not available for a WWTF, then the average of monthly flow rates derived from DMRs can be used. WLA values for each OPDES wastewater discharger are then summed to represent the total WLA for a given segment. Using this information, WLAs can be calculated using the approach as shown in the equations below.

4.3.3.3.1 WLA for Bacteria

$$WLA = WQS * flow * unit\ conversion\ factor\ (colonies/day)$$

Where:

$$WQS = 126\ colonies/100\ mL\ (E.\ coli); \text{ or } 33\ colonies/100\ mL\ (Enterococci)$$

$$Flow\ (mgd) = \text{permitted flow}$$

$$Unit\ conversion\ factor = 37,854,120$$

4.3.3.3.2 WLA for TSS

$$WLA = WQ\ goal * flow * unit\ conversion\ factor\ (lb/day)$$

Where:

$$WQ\ goal = \text{Waterbody specific water quality goal provided in Table 5-2, or monthly TSS limit in the current permit, whichever is smaller}$$

$$Flow\ (mgd) = \text{permitted flow or average monthly flow}$$

$$\text{Unit conversion factor} = 8.3445$$

4.3.3.3 WLA for Future Growth

Future growth allowances in TMDLs account for increased pollutant loadings and can be included as an allocation of pollutant loads from new sources expected in the future. For bacterial TMDLs, 10% of TMDL was reserved for future sources. For turbidity TMDLs, 1% of TMDL was reserved for future point sources because the turbidity criteria are not applied for high flow conditions including stormwater.

4.3.3.4 Step 4 - Calculate LA and WLA for MS4s

Given the lack of data and the variability of storm events and discharges from storm sewer system discharges, it is difficult to establish numeric limits on stormwater discharges that accurately address projected loadings. As a result, EPA regulations and guidance recommend expressing OPDES permit limits for MS4s as BMPs.

LAs can be calculated under different flow conditions. The LA at any particular flow exceedance is calculated as shown in the equation below.

$$\text{LA} = \text{TMDL} - \text{WLA}_{\text{WWTF}} - \text{WLA}_{\text{MS4}} - \text{WLA}_{\text{Growth}} - \text{MOS}$$

4.3.3.4.1 Bacterial WLAs for MS4s

For bacterial TMDLs, if there are no permitted MS4s in the Study Area, WLA_{MS4} is set to zero. When there are permitted MS4s in a watershed, first calculate the sum of $\text{LA} + \text{WLA}_{\text{MS4}}$ using the above formula, then separate WLA for MS4s from the sum based on the percentage of a watershed that is under a MS4 jurisdiction. This WLA for MS4s may not be the total load allocated for permitted MS4s unless the whole MS4 area is located within the study watershed boundary. However, in most cases the study watershed intersects only a portion of the permitted MS4 coverage areas.

4.3.3.4.2 Turbidity WLA for MS4s

For turbidity TMDLs, WLAs for permitted stormwater such as MS4s, construction, and multi-sector general permits are not calculated since these discharges occur under high flow conditions when the turbidity criteria do not apply.

4.3.3.5 Step 5 - Estimate Percent Load Reduction

Percent load reductions are not required items and are provided for informational purposes when making inferences about individual TMDLs or between TMDLs usually in regard to implementation of the TMDL.

The LDC approach recognizes that the assimilative capacity of a waterbody depends on stream flow and that the maximum allowable

loading varies with flow condition. Existing loading and load reductions required to meet the TMDL can also be calculated under different flow conditions. The difference between existing loading and the TMDL is used to calculate the loading reductions required. Percent reduction goals (PRG) are calculated through an iterative process of taking a series of percent reduction values applying each value uniformly to the measured concentrations of samples and verifying:

1. If the geometric mean of the reduced values of all samples is less than the geometric mean standards (for bacteria) or
2. If no more than 10% of the reduced values of the samples under flow-base conditions exceed the TMDL (for turbidity).

4.3.3.5.1 WLA Load Reduction

The WLA load reduction for bacteria was not calculated as it was assumed that continuous dischargers (OPDES-permitted WWTFs) are adequately regulated under existing permits to achieve WQS at the end-of-pipe and, therefore, no WLA reduction would be required. Currently, bacterial limits are not required for lagoon systems. Lagoon systems located within a sub-watershed of bacterially-impaired stream segment will be required to meet *E. coli* standards at the discharge when the permits are renewed.

MS4s are classified as point sources, but they are nonpoint sources in nature. Therefore, the percent reduction goal calculated for LA will also apply to the MS4 area within the bacterially-impaired sub-watershed. If there are no MS4s located within the Study Area requiring a TMDL, then there is no need to establish a PRG for permitted stormwater.

The WLA load reduction for TSS for dischargers without BOD/CBOD limits can be determined as follows:

- If permitted TSS limit is less than TSS goal for the receiving stream, there will be no reductions
- If permitted TSS limit is greater than TSS goal for the receiving stream, the permit limit will be set at the TSS goal.

4.3.3.5.2 LA Load Reduction

After existing loading estimates are computed for each pollutant, nonpoint load reduction estimates for each segment are calculated by using the difference between the estimate of existing loading and the allowable loading (TMDL) under all flow conditions. This difference is expressed as the overall PRG for the impaired waterbody. The PRG serves as a guide for the amount of pollutant reduction necessary to meet the TMDL.

E. coli and Enterococci: WQSs are considered to be met if the geometric mean of all future data is maintained below the geometric mean criteria (TMDL).

Turbidity: The PRG is the load reduction that ensures that no more than 10% of the samples under flow-base conditions exceed the TMDL.

SECTION 5 TMDL CALCULATIONS

5.1 Surrogate TMDL Target for Turbidity

Regression methods used in this report depend on the percentage of censored data. When censored data are less than or equal to 15%, the line of organic correlation (LOC) is applied with simple substitution of detection limit for censored data. When censored data are greater than 15%, maximum likelihood estimation (MLE) is applied for the data set without extreme outliers. Therefore, MLE was used for all waterbodies in **Table 5-1**.

Table 5-1 Censored TSS Data in Base Flow

Waterbody ID	Waterbody Name	Total Number of TSS Data	Number of Censored Data (# of samples falling below the 10 mg/L detection limit)	Percent of Censored Data (% of samples falling below the 10 mg/L detection limit)
OK220600010100_20	Mill Creek	26	23	88.5%
^a OK220600030010_10	Brushy Creek	11	9	81.8%
OK410210020150_00	Terrapin Creek	51	48	94.1%
OK410210020300_00	Cloudy Creek	18	15	83.3%
OK410400020200_00	Caney Creek	14	7	50.0%
OK410400080010_00	North Boggy Creek	16	12	75.0%
OK410400030490_00	Goose Creek	17	13	76.4%

TMDL was not developed for Goose Creek, but its turbidity and TSS relationship was used for Caney Creek.

^a Due to no TSS data in Brushy Creek (OK220600030010_00), the TSS data from Brushy Creek (OK220600030010_10) were used.

Using the line of organic correlation (LOC) and maximum likelihood estimation (MLE) methods described in Section 4.2, correlations between TSS and turbidity were developed for establishing the statistics of the regressions and the resulting TSS goals were provided in **Table 5-2**. The regression analyses for each impaired waterbody in the Study Area using the LOC method are displayed in **Figure 5-1** through **Figure 5-6**.

Beaver Creek (OK220600040030_00) has eleven paired TSS-turbidity data from 2000 to 2001. With three outliers removed from the LOC, R-square greater than 0.87 had achieved (R-square greater than or equal to 0.5 is considered as an acceptable regression relationship). An acceptable regression relationship (R^2 value of approximately 0.5 or higher) could not be developed for Mill Creek (OK220600010100_20), Terrapin Creek (OK410210020150_00), Caney Creek (OK410400020200_00), or North Boggy Creek (OK410400080010_00) using either data from the assessment period or considering all available data. Therefore, the regression statistics for these waterbodies were derived from nearby waterbodies with similar watershed characteristics.

The Mill Creek (OK220600010100_20) and North Boggy Creek (OK410400080010_00) regression statistics were derived from the nearby waterbody of Brushy Creek (OK220600030010_10) using the MLE method. Brushy Creek (OK220600030010_10) is considered a good alternative because the waterbody has similar landuse area percentage and is located in same ecoregion (Arkansas Valley).

For Terrapin Creek (OK410210020150_00), all 13 TSS data from 2015 to 2017 was reported as below the detection limit, and using all available paired TSS-turbidity data (from 2005 to 2017) did not achieve an acceptable regression relationship either (see [Appendix Table E-1](#)). Therefore, the regression statistics for Terrapin Creek was derived from a nearby Cool Water Aquatic Community designated waterbody, Cloudy Creek (OK410210020300_00). The Cloudy Creek's regression completed in the 2014 Bacterial and Turbidity Total Maximum Daily Loads for the Oklahoma Lower Red River – Little River Basin Study Area Report was used for Terrapin Creek's regression.

Caney Creek (OK410400020200_00) was derived from Goose Creek (OK410400030490_00). MLE method was used for Goose Creek in this report, instead of LOC in the 2012 Bacterial and Turbidity Total Maximum Daily Loads for the Muddy Boggy Creek Area, Oklahoma TMDLs Report. The regression statistics of these waterbodies completed in other turbidity TMDL reports or using most recent data are highlighted in orange and included in **Table 5-2** for reference.

Table 5-2 Regression Statistics and TSS Goals

Waterbody ID	Waterbody Name	R-square	NRMSE	TSS Goal (mg/L) ^a	MOS ^b
OK220600010100_20	Mill Creek	0.47	19.4%	13	20%
OK220600030010_00	Brushy Creek	0.65	14.8%	34	15%
^c OK220600030010_10	Brushy Creek	0.47	19.4%	13	20%
OK220600040030_00	Beaver Creek	0.87	9.3%	49	10%
OK410210020150_00	Terrapin Creek	0.74	12.0%	6	15%
^d OK410210020300_00	Cloudy Creek	0.74	12.0%	6	15%
OK410400010010_20	Red River	0.82	7.0%	54	10%
OK410400020200_00	Caney Creek	0.66	24.3%	22	25%
^e OK410400030490_00	Goose Creek	0.66	24.3%	22	25%
OK410400080010_00	North Boggy Creek	0.47	19.4%	13	20%

^a Calculated using the regression equation and the turbidity standard (50 NTU for WWAC or 10 NTU for CWAC)

^b Based on the goodness-of-fit of the turbidity-TSS regression (NRMSE)

^c Stream not included in this TMDL report, it is shown here for reference.

^d Stream not included in this TMDL report, it is shown here for reference. See "2014 Bacterial and Turbidity Total Maximum Daily Loads for the Oklahoma Lower Red River – Little River Basin Study Area".

^e Streams not included in this TMDL report, it is shown here for reference. See "2012 Bacterial and Turbidity Total Maximum Daily Loads for the Muddy Boggy Creek Area, Oklahoma".

Figure 5-1 TSS-Turbidity Regression Estimates of Brushy Creek (OK220600030010_00) for Mill Creek (OK220600010100_20) and North Boggy Creek (OK410400080010_00)

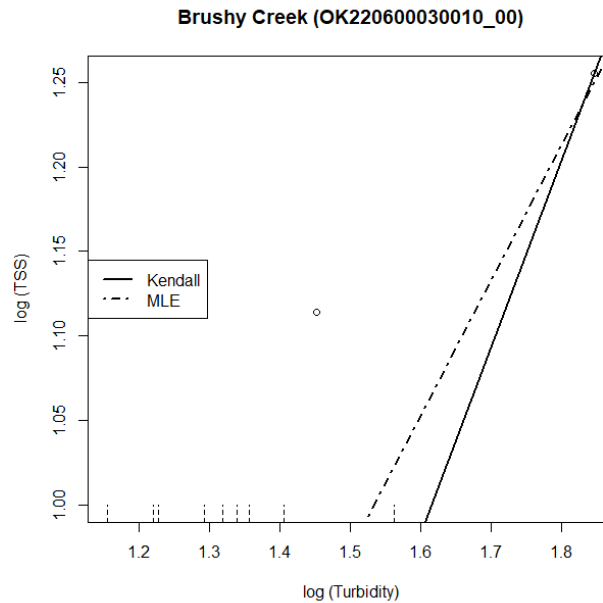


Figure 5-2 TSS-Turbidity Linear Regression for Brushy Creek (OK220600030010_00)

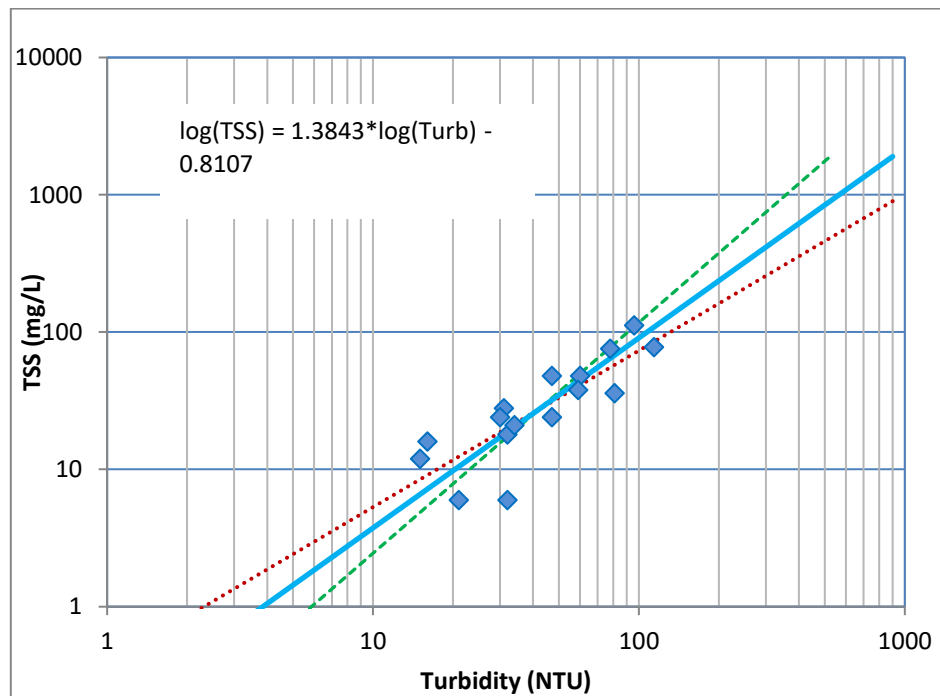


Figure 5-3 TSS-Turbidity Linear Regression for Beaver Creek (OK220600040030_00)

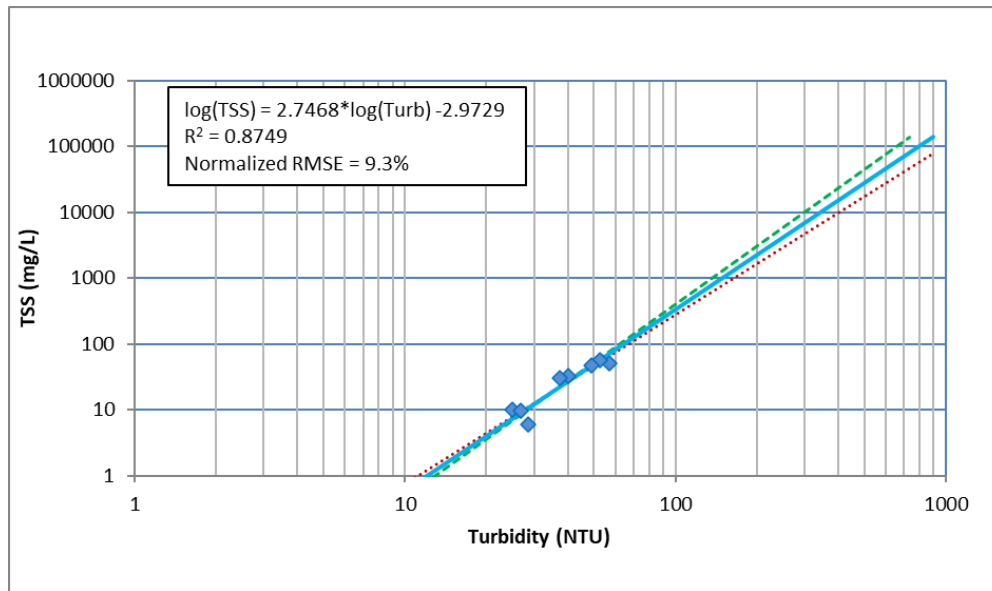


Figure 5-4 TSS-Turbidity Regression Estimates of Cloudy Creek (OK410210020150_00) for Terrapin Creek (OK410210020150_00)

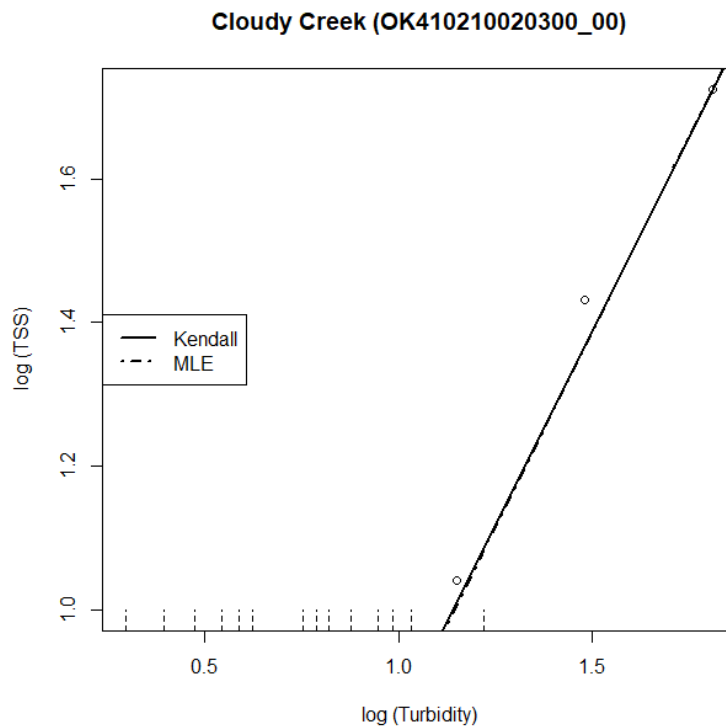


Figure 5-5 Linear Regression for TSS-Turbidity for the Red River (OK410400010010_20)


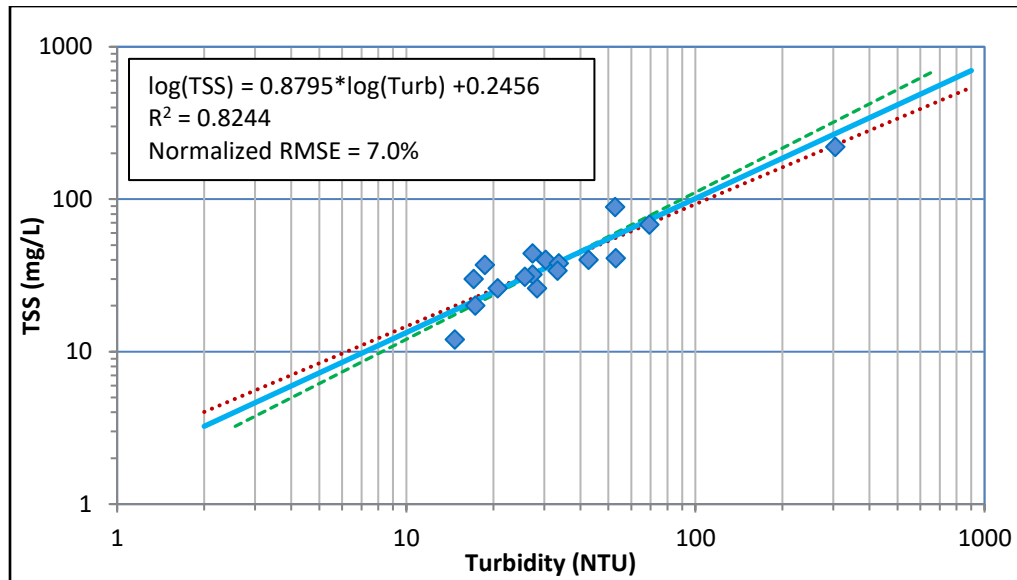


Figure 5-6 TSS-Turbidity Regression Estimates of Goose Creek (OK410400030490_00) for Caney Creek (OK410400020200_00)

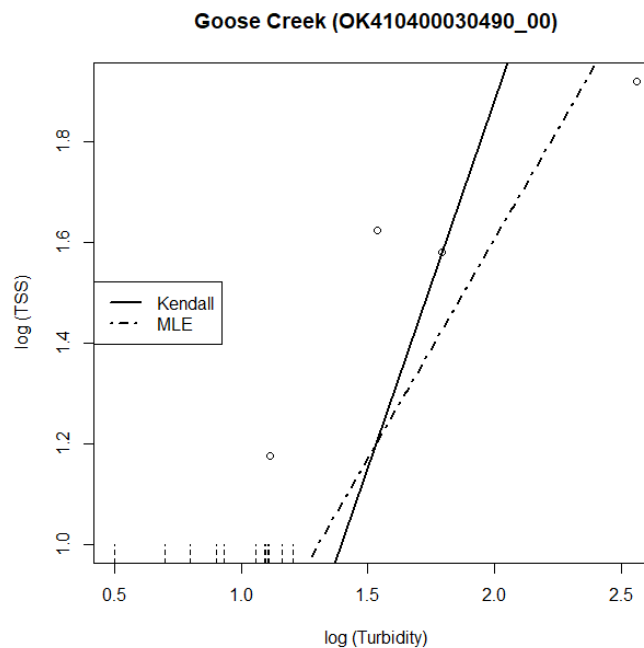


5.2 Flow Duration Curve

Following the same procedures described in Section 4.3, a flow duration curve for each stream segment requiring a TMDL in the Study Area was developed. These are shown in **Figure 5-7** through **Figure 5-15**.


No flow gage exists on the Poteau River segment (OK220100010010_00). However, on the next upstream segment of the Poteau River (OK220100010010_05), there is the USGS gage station 07249413 near Panama. The flow duration curve was based on measured flows from 1989 to 2021.

Figure 5-7 Flow Duration Curve for the Poteau River (OK220100010010_00)

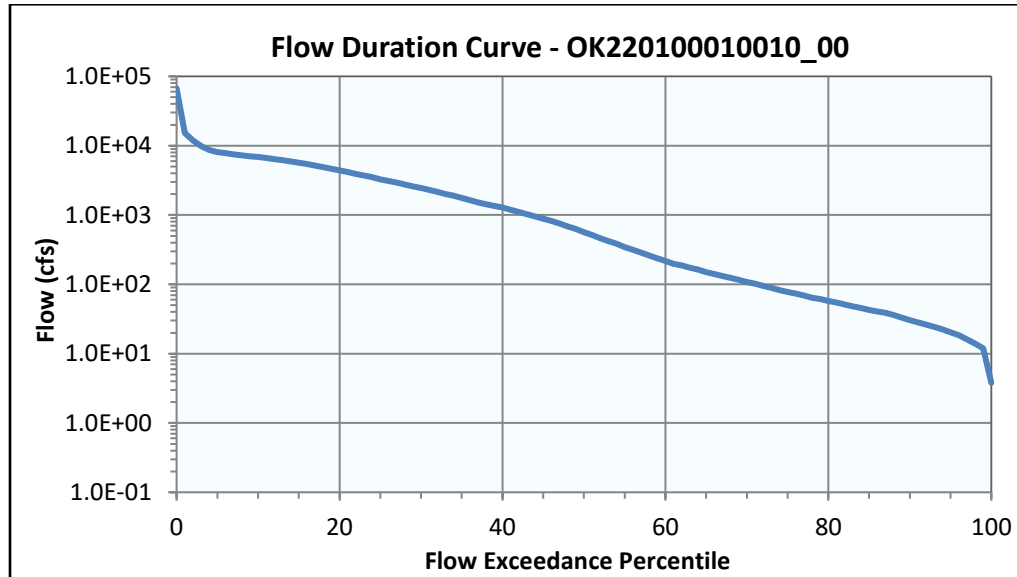


The flow duration curve for Poteau River (OK220100020010_10) was developed based on the flow data from 1992 to 2021 at USGS gage station 07247015.

Figure 5-8 Flow Duration Curve for Poteau River (OK220100020010_10)

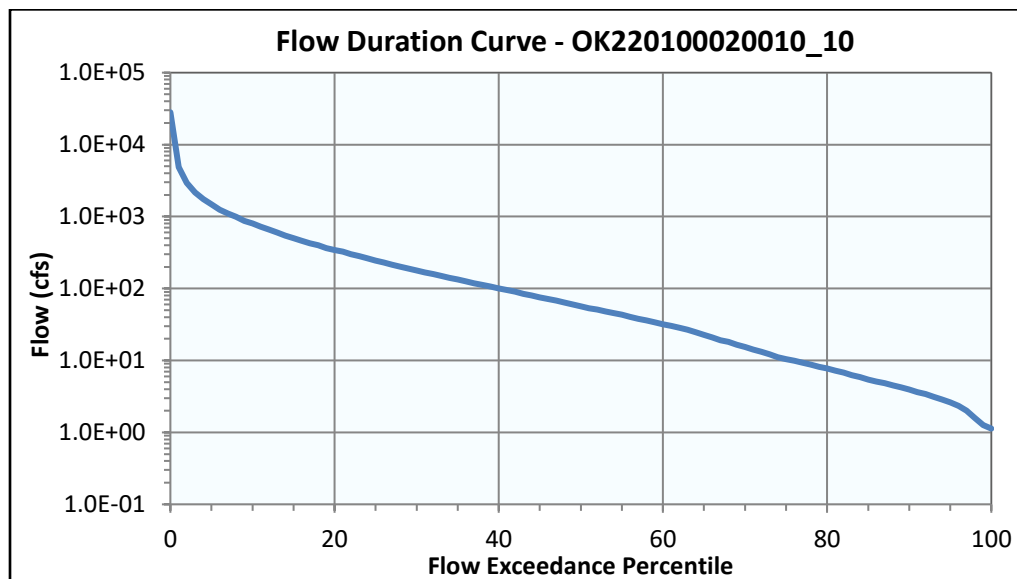


No flow gage exists on Mill Creek (OK220600010100_20). Therefore, flows for this waterbody was estimated using the watershed area ratio method based on measured flows for the North Canadian River (OK520510000010_00) at USGS gage station 07242000. The flow duration curves were based on measured flows from 1937 to 2021.

Figure 5-9 Flow Duration Curve for Mill Creek (OK220600010100_20)

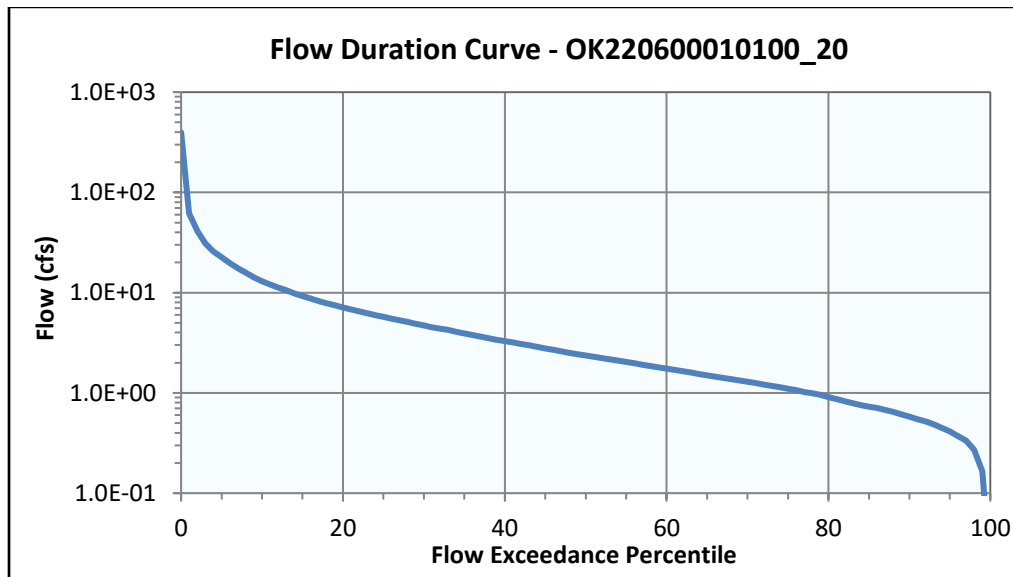


No flow gage exists on this segment of Brushy Creek (OK220600030010_00). Upstream of the segment of interest, on Brushy Creek, is an USGS station but only with daily flow data from 1978 to 1983. Therefore, flows for this waterbody was estimated using the watershed area ratio method based on measured flows from the Muddy Boggy Creek near Farris, OK (OK410400050270_00) at USGS gage station 07334000 which is both geographically close and has similar land uses. The flow duration curve was based on measured flows from 1937 to 2021.

**Figure 5-10 Flow Duration Curve for Brushy Creek
(OK220600030010_00)**

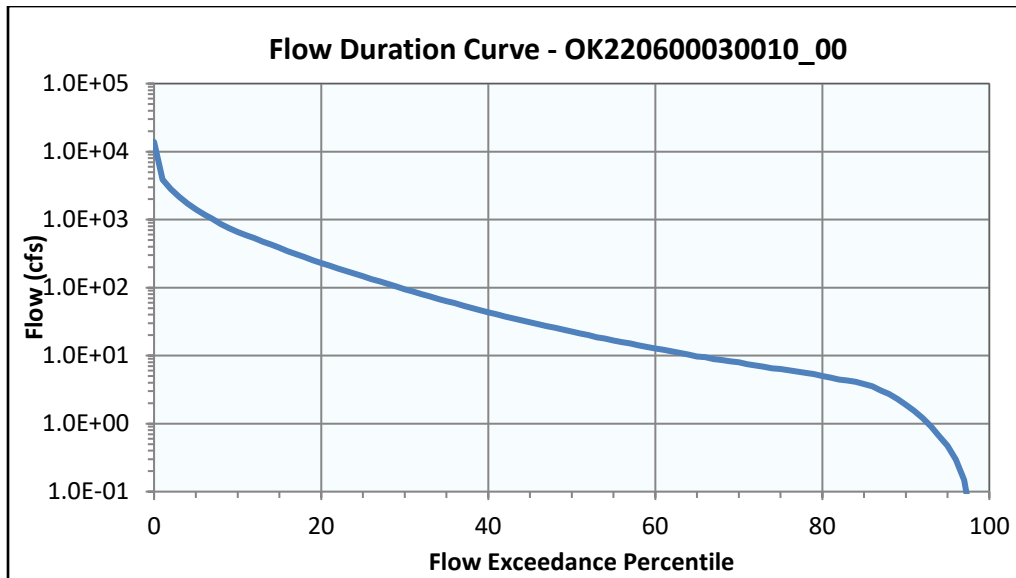


No flow gage exists on Beaver Creek (OK220600040030_00). Therefore, flows for this waterbody were estimated using the watershed area ratio method based on measured flows from the Fourche Maline Creek (OK220100040020_00) at USGS gage station 07247500 which is both geographically close and has similar land uses. The flow duration curve was based on measured flows from 1991 to 2021. There is mean daily flow data going back to October 1, 1938 but there is a gap of missing data from May 1, 1991 then starts recording mean daily flow data again in October 1, 1991. Because of this gap in the data, the flow data considered, started October 1, 1991 and ended December 31, 2021.

Figure 5-11 Flow Duration Curve for the Beaver Creek (OK220600040030_00)

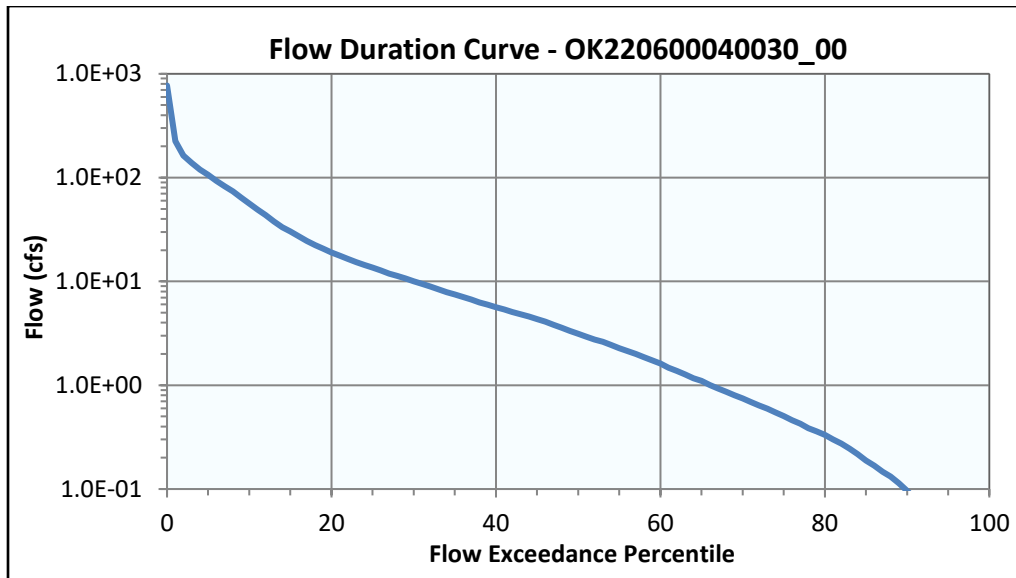


No flow gage exists on Terrapin Creek (OK410210020150_00). Therefore, flows for this waterbody were estimated using the watershed area ratio method based on measured flows at USGS gage station 07337900 (Glover River, near Glover, Oklahoma) since they are geographically close and have similar land uses. The flow duration curve was based on measured flows from 1961 to 2021.

Figure 5-12 Flow Duration Curve for the Terrapin Creek (OK410210020150_00)

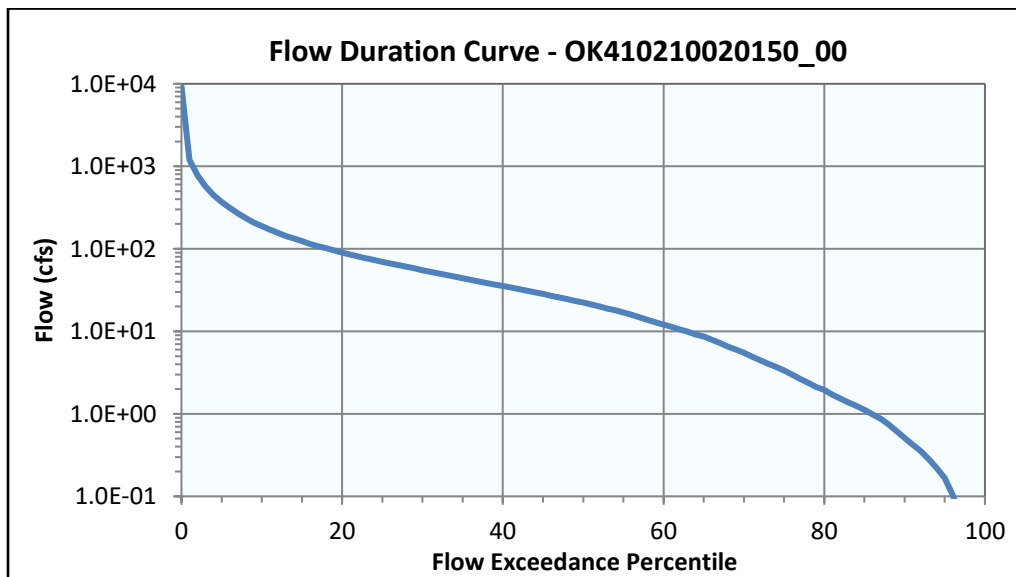


The flow duration curve for Red River (OK410400010010_20) was developed based on the flow data from 1905 to 2021 at USGS gage station 07335500.

Figure 5-13 Flow Duration Curve for the Red River (OK410400010010_20)

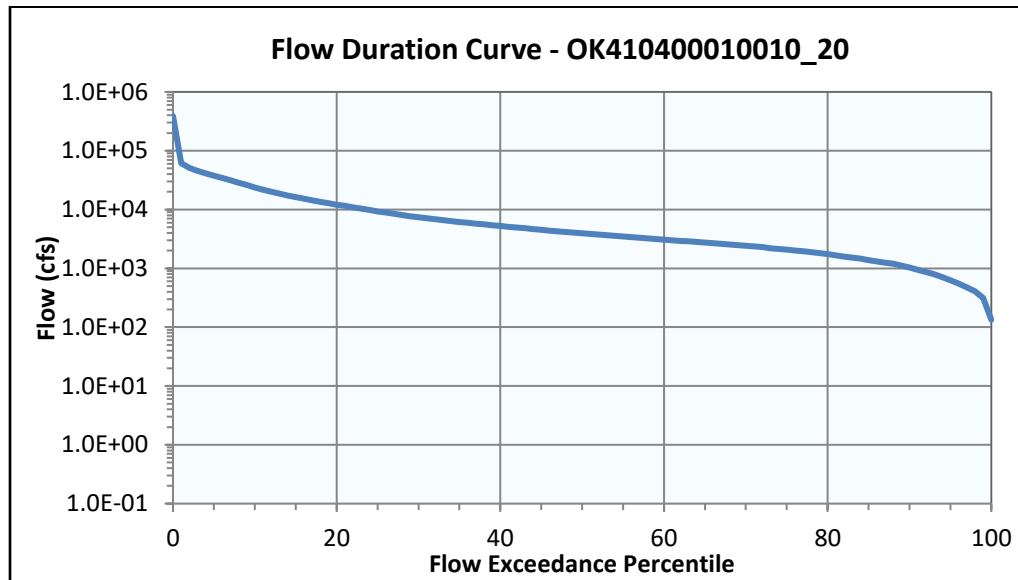


No flow gage exists on Caney Creek (OK410400020200_00). Therefore, flows for this waterbody was estimated using the watershed area ratio method based on measured flows for Clear Boggy Creek (OK410400030010_00) at USGS gage station 07334800. The flow duration curves were based on measured flows from 2012 to 2021.

Figure 5-14 Flow Duration Curve for the Caney Creek (OK410400020200_00)

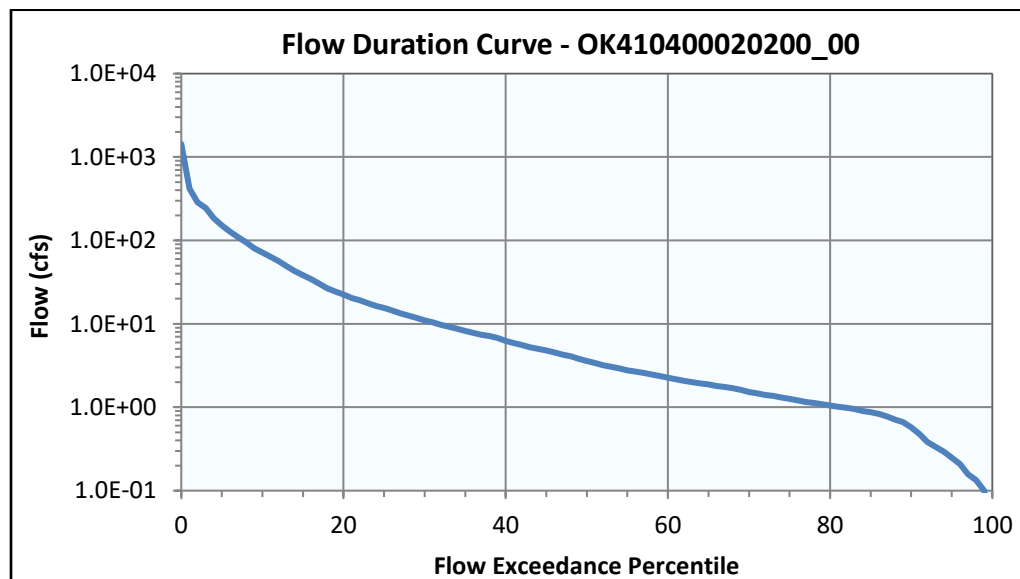

No flow gage exists on North Boggy Creek (OK410400080010_00). Therefore, flows for this waterbody was estimated using the watershed area ratio method based on measured flows for Muddy Boggy Creek (OK410400050270_00) at USGS gage station 07334000. The flow duration curves were based on measured flows from 1937 to 2021.

Figure 5-15 Flow Duration Curve for the North Boggy Creek (OK410400080010_00)

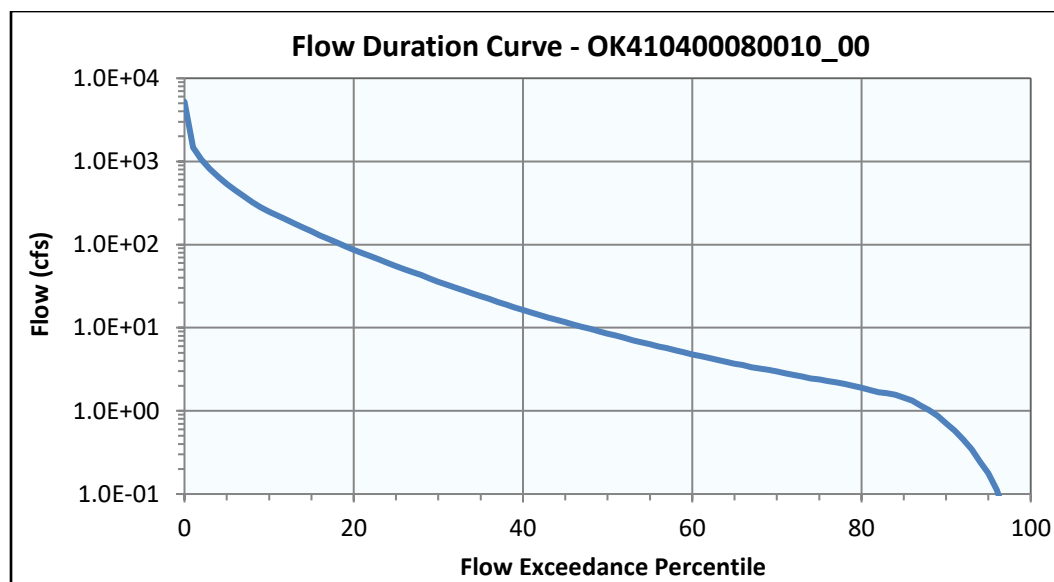

5.3 Estimated Loading and Critical Conditions

EPA regulations [40 CFR § Part 130.7(c)(1)] require TMDLs to take into account critical conditions for stream flow, loading, and all applicable WQS. To accomplish this, available in-stream WQM data were evaluated with respect to flows and magnitude of water quality criteria exceedance using LDCs.

5.3.1 Bacterial LDCs

To calculate the allowable bacterial load, the flow rate at each flow exceedance percentile is multiplied by a unit conversion factor (24,465,525) and the geometric mean water quality criterion for each bacterial indicator. This calculation produces the maximum bacterial load in the stream over the range of flow conditions. The allowable bacterial (*E. coli* or Enterococci) loads at the WQS establish the TMDL and are plotted versus flow exceedance percentile as a LDC. The x-axis indicates the flow exceedance percentile, while the y-axis is expressed in terms of a bacterial load.


To estimate existing loading, the geometric mean of all bacterial observations (concentrations) for the primary contact recreation season (May 1st through September 30th) from 2011 to 2014 are paired with the flows measured or estimated in that waterbody. Pollutant loads are then calculated by multiplying the measured

bacterial concentration by the flow rate and the unit conversion factor of 24,465,525. The bacterial LDCs developed for each impaired waterbody are shown in **Figure 5-16** through

Figure 5-18.

The LDC for Poteau River (OK220100010010_00) (**Figure 5-16**) is based on Enterococci bacterial measurements collected during primary contact recreation season at WQM station 220100010010-001AT.

Figure 5-16 Load Duration Curve for Enterococci in Poteau River (OK220100010010_00)

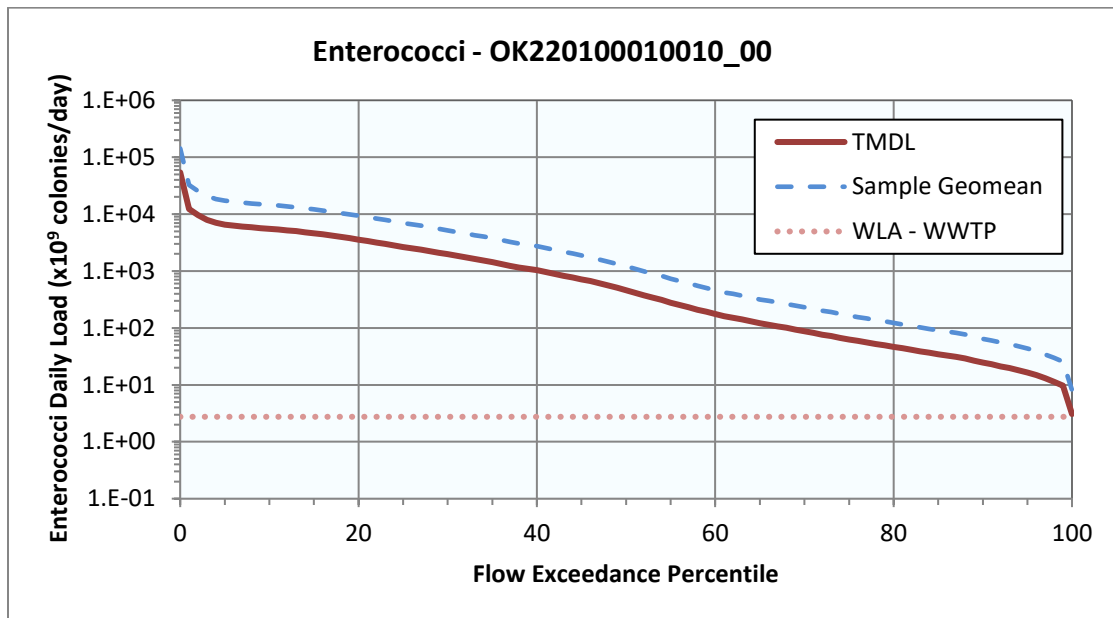

The LDCs for Poteau River segment OK220100020010_10 are based on Enterococci (**Figure 5-17**) and *E. coli* (**Figure 5-18**) bacterial measurements collected during primary contact recreation season at USGS 07247350 and USGS 07247015.

Figure 5-17 Load Duration Curve for Enterococci in Poteau River
(OK220100020010_10)


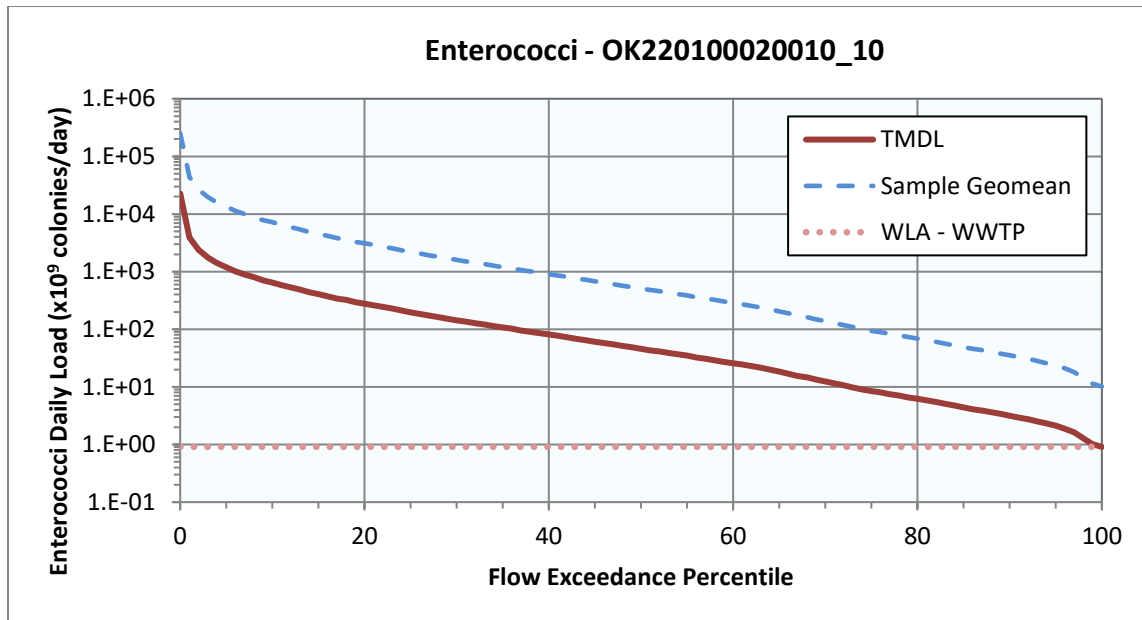


Figure 5-18 Load Duration Curve for *E. coli* in Poteau River
(OK220100020010_10)

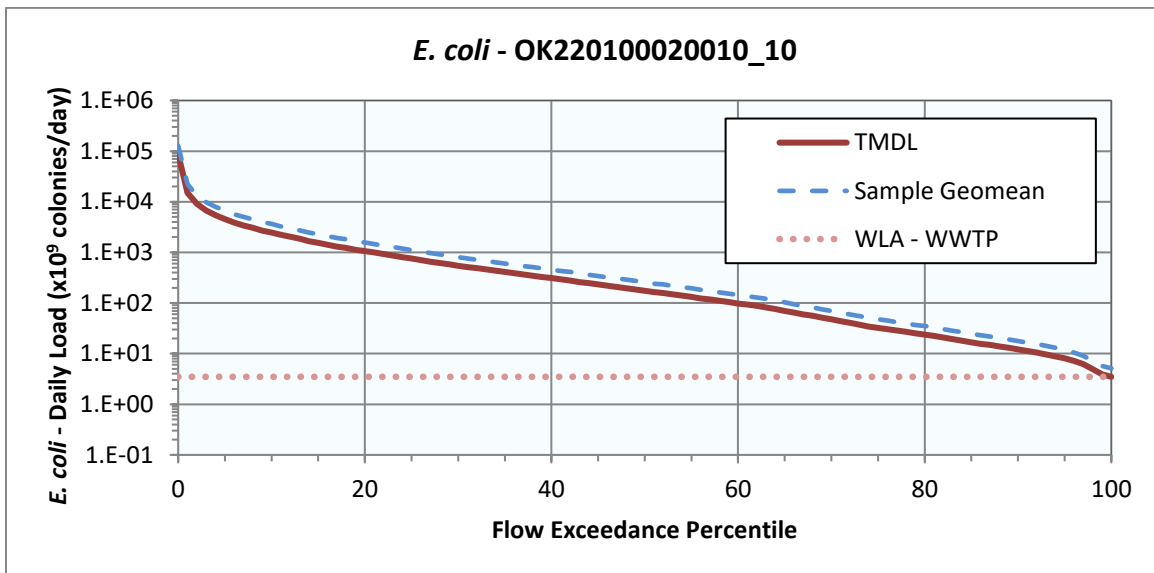

5.3.2 TSS LDCs

To calculate the TSS load at the WQ target, the flow rate (cfs) at each flow exceedance percentile is multiplied by a unit conversion factor (5.39377) and the TSS goal (mg/L) for each waterbody. This calculation produces the maximum TSS load in the waterbody that will result in attainment of the 50 NTU target for turbidity. The allowable TSS loads at the WQS establish the TMDL and are plotted versus flow exceedance percentile as a LDC. The x-axis indicates the flow exceedance percentile, while the y-axis is expressed in terms of a TSS load in pounds per day.

To estimate existing loading, TSS and turbidity observations from 1998 to 2021 are paired with the flows measured or projected on the same date for the waterbody. For sampling events with both TSS and turbidity data, the measured TSS value is used. Pollutant loads are then calculated by multiplying the TSS concentration by the flow rate and the unit conversion factor. The associated flow exceedance percentile is then matched with the flow from the tables provided in **Appendix Table C-1**. The observed TSS or converted turbidity loads are then added to the LDC plot as points. These points represent individual ambient water quality samples of TSS. Points above the LDC indicate the TSS goal was exceeded at the time of sampling. Conversely, points under the LDC indicate the sample did not exceed the TSS goal.

Figure 5-19 through **Figure 5-25** show the TSS LDCs developed for the waterbodies addressed in this TMDL report. Data in the figures indicate that for most waterbodies, TSS levels exceed the water quality target during all flow conditions, indicating water quality impairments due to nonpoint sources or a combination of point and nonpoint sources. Wet weather influenced samples found during low flow conditions can be caused by an isolated rainfall event during dry weather conditions. It is noted that the LDC plots include data under all flow conditions to show the overall condition of the waterbody. However, the turbidity standard only applies to base-flow conditions. Thus, when interpreting the LDC to derive TMDLs for TSS, only the portion of the graph corresponding to flows above the 25th flow exceedance percentile should be used. WLAs for point sources discharges (continuous) of inorganic TSS are shown on a LDC as a horizontal line which represents the sum of all WLAs for TSS in a given watershed.

Figure 5-19 Load Duration Curve for Total Suspended Solids in the Mill Creek (OK220600010100_20)

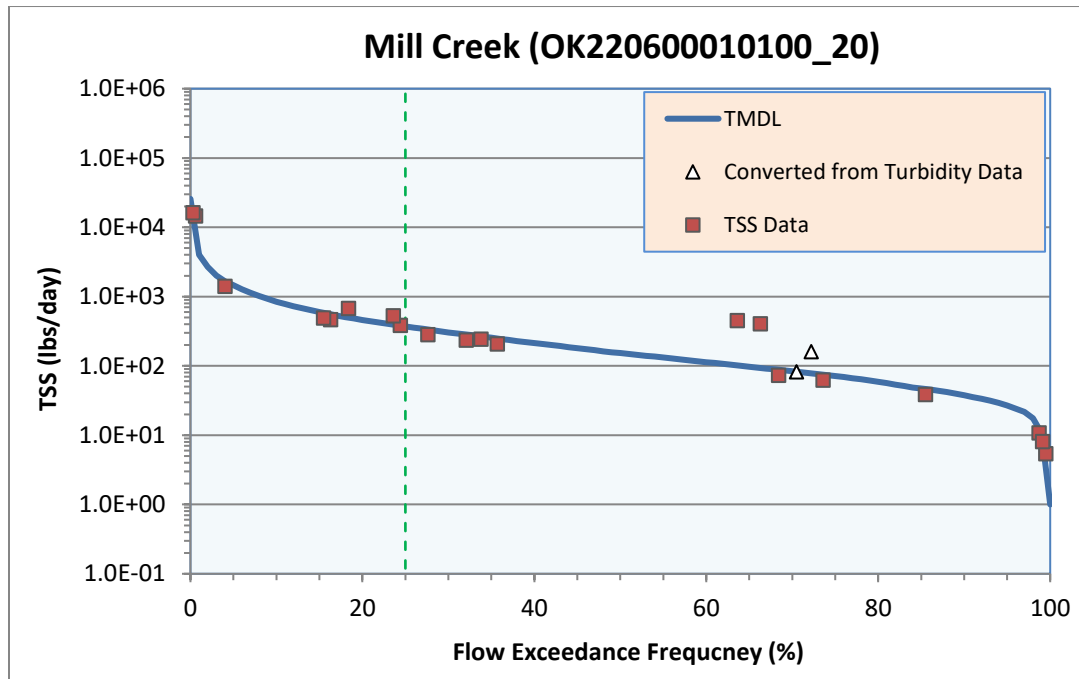


Figure 5-20 Load Duration Curve for Total Suspended Solids in the Brushy Creek (OK220600030010_00)

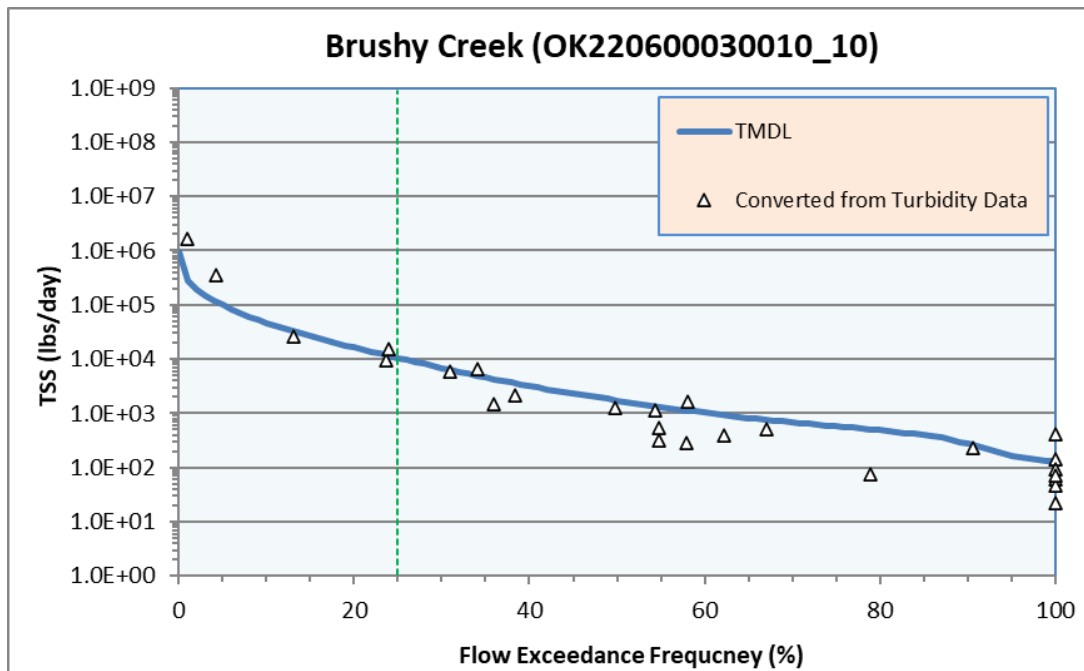


Figure 5-21 Load Duration Curve for Total Suspended Solids in the Beaver Creek (OK220600040030_00)

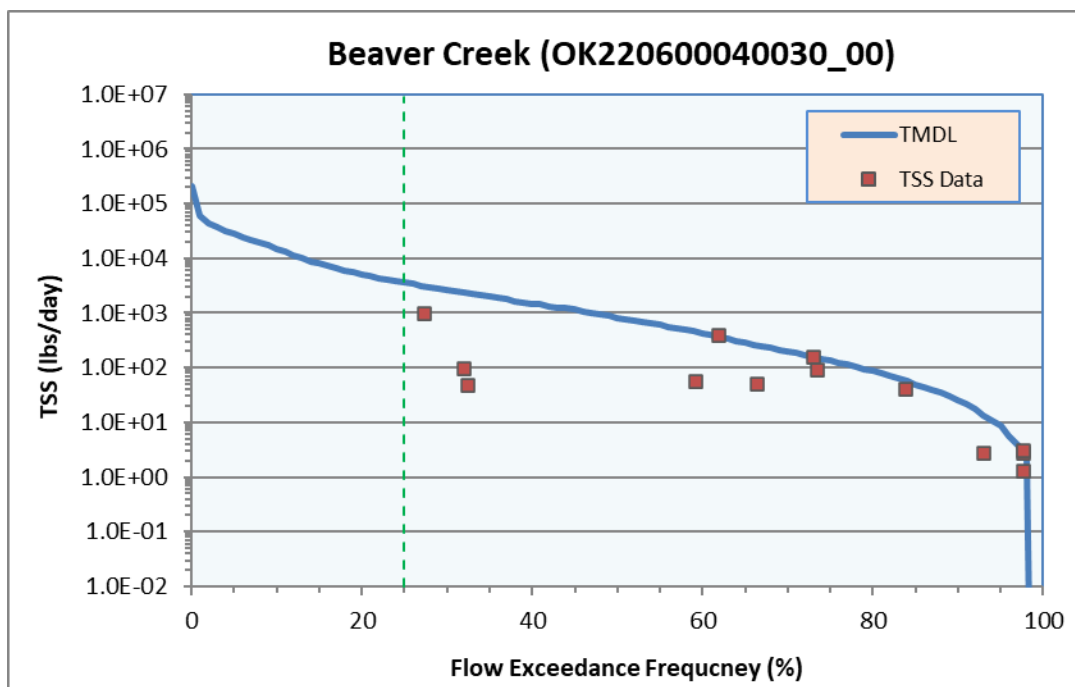


Figure 5-22 Load Duration Curve for Total Suspended Solids in the Terrapin Creek (OK410210020150_00)

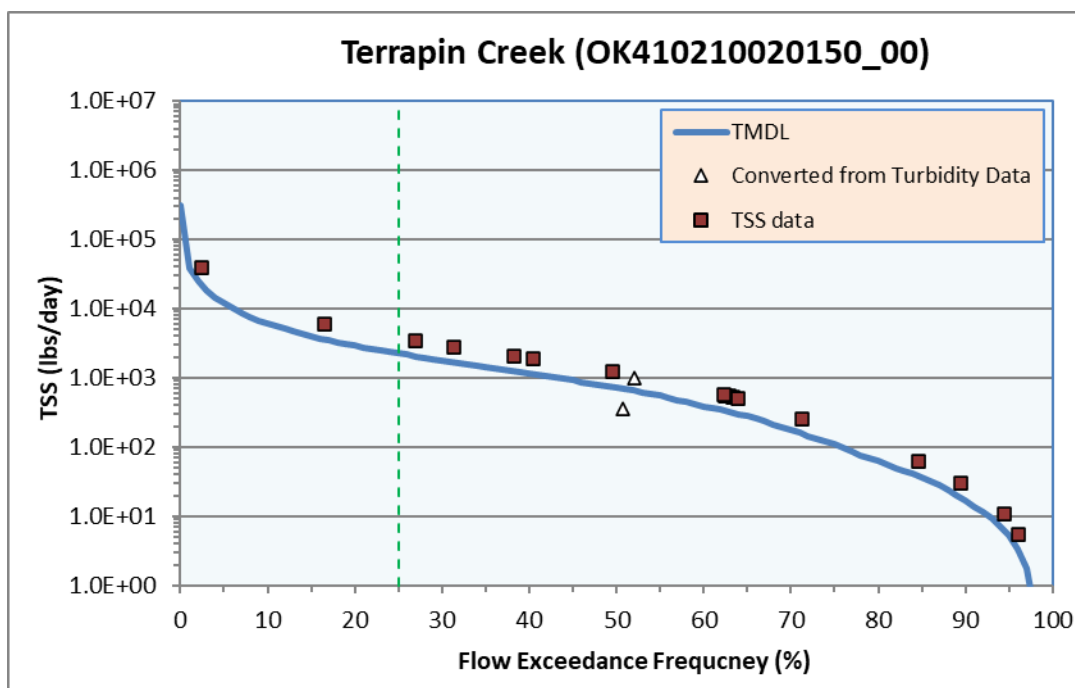


Figure 5-23 Load Duration Curve for Total Suspended Solids in the Red River (OK410400010010_20)

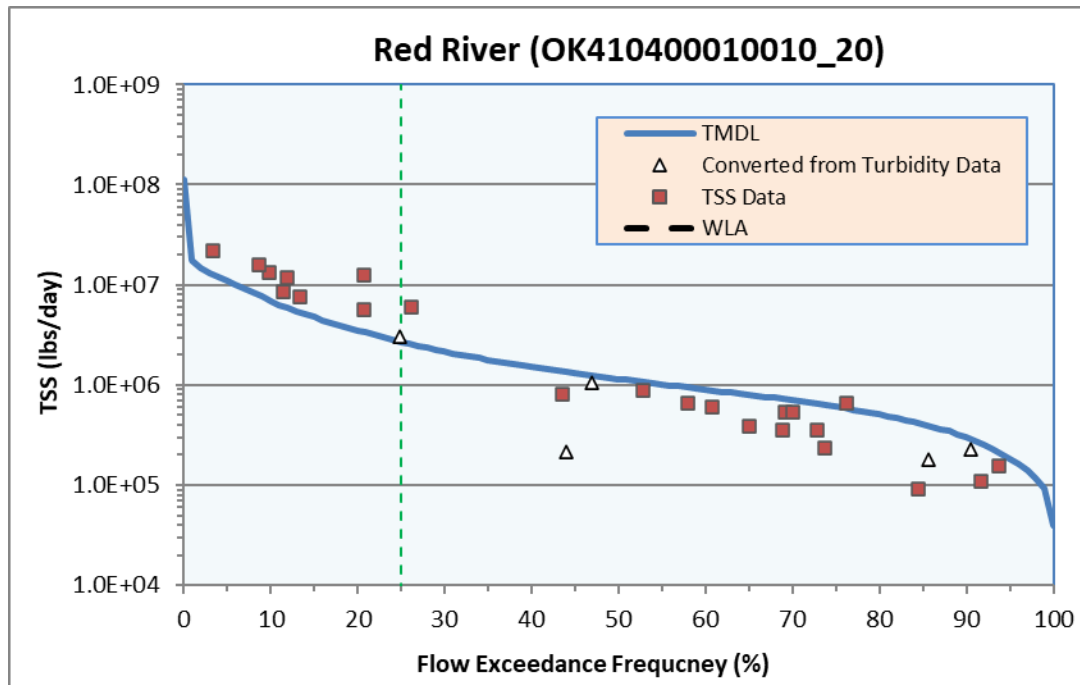


Figure 5-24 Load Duration Curve for Total Suspended Solids in the Caney Creek (OK410400020200_00)


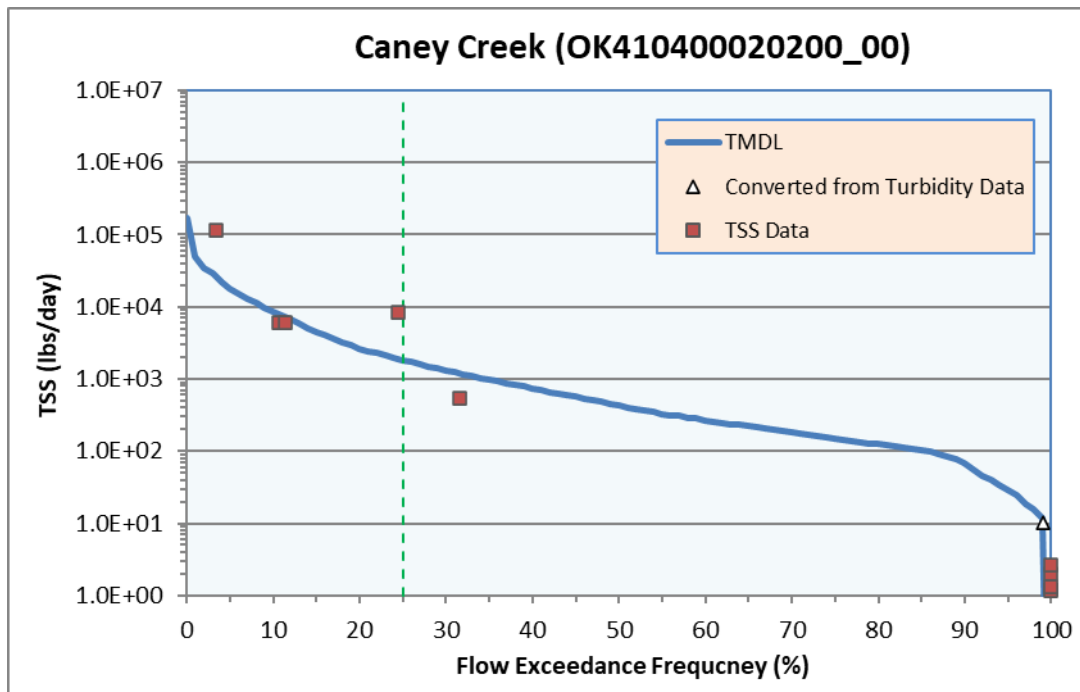


Figure 5-25 Load Duration Curve for Total Suspended Solids in the North Boggy Creek (OK410400080010_00)

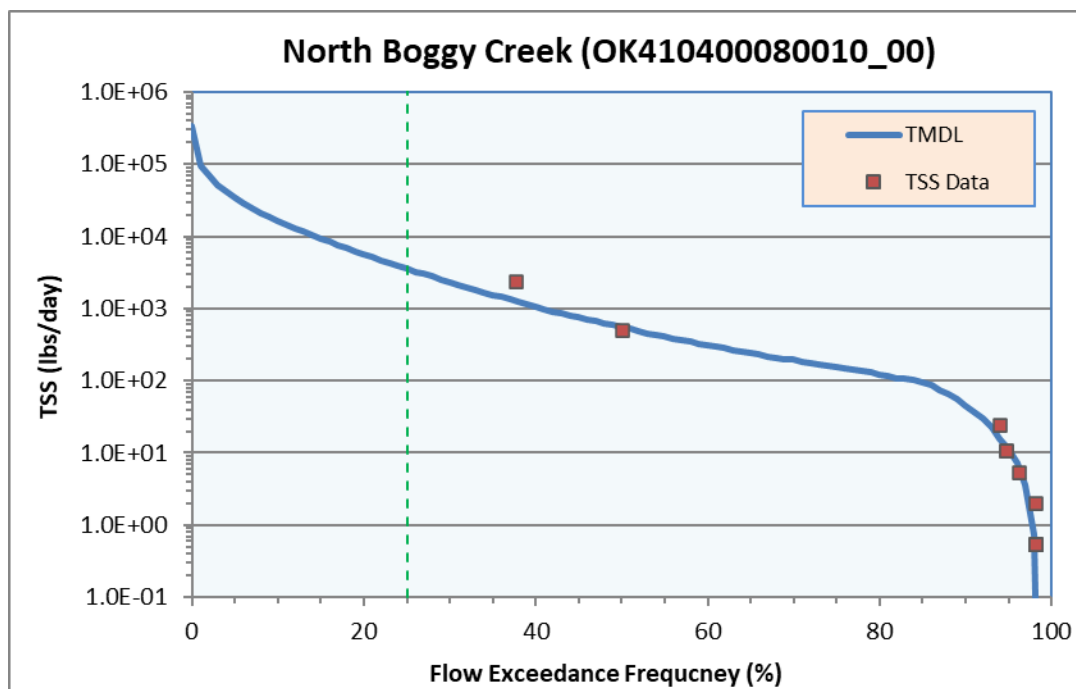

5.3.3 Establish Percent Reduction Goals

The LDC approach recognizes that the assimilative capacity of a waterbody depends on the flow, and that maximum allowable loading varies with flow condition. Existing loading and load reductions required to meet the TMDL can also be calculated under different flow conditions. The difference between existing loading and the TMDL is used to calculate the loading reductions required.

5.3.3.1 Bacterial PRGs

PRGs for bacteria are calculated through an iterative process of taking a series of percent reduction values, applying each value uniformly to the concentrations of samples and verifying if the geometric mean of the reduced values of all samples is less than the WQS geometric mean. **Table 5-3** represents the percent reductions necessary to meet the TMDL water quality target for each bacterial indicator in each of the impaired waterbodies in the Study Area. The PRGs range from 38.8% to 91.9%.

Table 5-3 TMDL Percent Reductions Required to Meet Water Quality Standards for Indicator Bacteria

Waterbody ID	Waterbody Name	Required Reduction Rate	
		EC	ENT
OK220100010010_00	Poteau River	-	65.8%
OK220100020010_10	Poteau River	38.8%	91.9%

5.3.3.2 TSS PRGs

PRGs for TSS are calculated as the required overall reduction so that no more than 10% of the samples exceed the water quality target for TSS. The PRGs for the six waterbodies included in this TMDL report are summarized in **Table 5-4** and range from 15.2% to 80.1%.

Table 5-4 TMDL Percent Reductions Required to Meet Water Quality Targets for Total Suspended Solids

Waterbody ID	Waterbody Name	Required Reduction Rate
OK220600010100_20	Mill Creek	80.1%
OK220600030010_00	Brushy Creek	53.7%
OK220600040030_00	Beaver Creek	15.2%
OK410210020150_00	Terrapin Creek	49.1%
OK410400010010_20	Red River	18.3%
OK410400020200_00	Caney Creek	55.5%
OK410400080010_00	North Boggy Creek	52.8%

5.4 Wasteload Allocation**5.4.1 Bacterial WLA**

For bacterial TMDLs, OPDES-permitted facilities are allocated a daily wasteload calculated as their permitted flow rate multiplied by the in-stream geometric mean water quality criterion. In other words, the facilities are required to meet in-stream criteria in their discharge. **Table 5-5** summarizes the WLA for the OPDES-permitted facilities within the Study Area. The WLA for each facility discharging to a bacterially-impaired waterbody is derived from the following equation:

$$WLA = WQS * flow * unit\ conversion\ factor\ (colonies/day)$$

Where:

WQS = 33 and 126 colonies/100 mL for Enterococci and *E. coli* respectively

Flow (mgd) = permitted flow

Unit conversion factor = 37,854,120

When multiple OPDES facilities occur within a watershed, individual WLAs are summed and the total WLA for continuous point sources is included in the TMDL calculation for the corresponding waterbody. When there are no OPDES WWTFs discharging into the contributing watershed of a stream segment, then the WLA is zero. Compliance with the WLA will be achieved by adhering to *E. coli* limits and disinfection requirements of OPDES permits. These discharges or any other discharges with a bacterial WLA will be required to monitor for *E. coli* as their permits are renewed.

Table 5-5 indicates which point source dischargers within the Study Area currently have a disinfection requirement in their permit. Certain facilities that utilize lagoons for treatment have not been required to provide disinfection since storage time and exposure to ultraviolet radiation from sunlight should reduce bacterial levels. In the future, all point source dischargers which are assigned a wasteload allocation but do not currently have a bacterial limit in their permit will receive a permit limit consistent with the wasteload allocation as their permits are reissued. Regardless of the magnitude of the WLA calculated in these TMDLs, future new discharges of bacteria or increased bacterial load from existing discharges will be considered consistent with the TMDL provided that the OPDES permit requires in-stream criteria to be met.

Permitted stormwater discharges are considered point sources. MS4 WLAs are shown in Section 5.8.

Table 5-5 Bacterial Wasteload Allocations for OPDES-Permitted Facilities

WBID and Waterbody Name	Facility Name	OPDES Permit No.	Dis-infection?	Design Flow (mg/d)	Wasteload Allocation (x10 ⁸ colonies/day)	
					ENT	<i>E. coli</i>
OK220100010010_00 Poteau River	OG&E River Valley Generating Station	OK0040169	Yes	1.65	20.6	-
OK220100010010_00 Poteau River	Town of Pocola	OK0034134	Yes	0.55	6.9	-
OK220100020010_10 Poteau River	Heavener Utilities Authority	OK0038407	Yes	0.65	8.1	31.0
OK220100020010_10 Poteau River	Jim E. Hamilton Correctional Center	OK0022951	No	0.08	1.0	3.8

5.4.2 Total Suspended Solids WLA

As discussed in Section 3.2.1, OPDES-permitted facilities discharging primarily inorganic TSS are allocated a daily wasteload calculated by using the average of self-reported monthly flow¹ multiplied by the water quality target. In other words, the facilities are required to meet in-stream criteria in their discharge. If the current monthly TSS limits of a facility are greater than in-stream TSS criteria, the new limits equal to in-stream criteria will be applied to the facility as their permit is renewed. There are no facilities given TSS WLA.

By definition, any stormwater discharge occurs during periods of rainfall and elevated flow conditions. Elevated turbidity levels may be expected during, and for several days after, a runoff event. However, Oklahoma's Water Quality Standards specify that the criteria for turbidity "apply only to seasonal base flow conditions" [OAC 252:730-5-12(f)(7)]. Therefore, Oklahoma Water Quality Standard for turbidity does not apply to stormwater runoff from the watershed, including MS4. As mentioned above, development for future growth will affect turbidity levels in the watershed, but stormwater runoff from development sites are not covered by the WQSSs. To accommodate the potential for future growth in the watersheds of turbidity impaired stream segments, 1% of TSS loading is reserved as part of the WLA.

5.4.3 WLA for Future Growth

Future growth allowances account for increased pollutant loadings and can be included as an allocation of pollutant loads from new sources expected in the future. In this report, 10% of bacteria loading and 1% of TSS loading were reserved for future growth.

5.4.4 Permit Implication

5.4.4.1 Bacterial Permit Limitations

All point source dischargers except MS4s which are assigned a wasteload allocation in **Table 5-5** will receive a permit limit equal to the water quality standard as their permits are reissued and are required to meet water quality standard at the end of pipe. MS4s are considered as point sources and will be assigned a wasteload allocation. However, due the nature of storm water discharges and the typical lack of information on which to base numeric water quality-based effluent limitations, the TMDL requirements are implemented through establishing a comprehensive stormwater management program (SWMP) or storm water pollution prevention plan (SWPPP).

Regardless of the magnitude of the WLA calculated in these TMDLs, future new discharges of bacteria or increased bacterial load from

¹ OAC 252:740-5-2. Regulatory flow determination.

existing discharges will be considered consistent with the TMDL provided that the OPDES permit requires in-stream criteria to be met.

5.4.4.2 TSS Permit Limitations

Stormwater discharges from MS4, industrial facilities, constructions occur only during or immediately following periods of rainfall and elevated flow conditions when the turbidity criteria do not apply and therefore are not considered potential contributors of turbidity impairment in this TMDL report.

The general permit for rock, sand and gravel quarries (OKG950000) does not allow existing facilities to discharge of wastewater to waterbodies included in Oklahoma's 303(d) list of impaired waterbodies listed for turbidity for which a TMDL result indicates that discharge limits more stringent than 45 mg/L for TSS are required. For a new facility, no discharge is allowed into waterbodies listed as impaired for turbidity in Oklahoma's 303(d) list. Also, if a facility discharges to a stream segment that is not included in Oklahoma's 303(d) list, but is within one mile upstream of an impaired segment, then the discharge will be treated as though it were to be to an impaired segment (DEQ 2018).

The TSS limits for water treatment plant with backwash discharge, mines with dewatering operations or any other facilities with TSS limits but without BOD or CBOD limitations can be determined as follows:

- If the corresponding TSS target in **Table 5-2** is equal to or greater than the daily maximum limit in the current permit when a permit comes for renewal, the permit TSS limits will stay the same and the TMDL will have no impact on the permit limits.
- If the corresponding TSS target in **Table 5-2** is less than the daily maximum limit in the current permit when a permit comes for renewal, the corresponding TSS target in **Table 5-2** will become the daily maximum limit in the renewed permit.
- The TMDLs do not place specific requirements for monthly average limit. Permit authority will determine the proper monthly average limit.
- However, under no circumstances, will the monthly average limit in the renewed permit be greater than the monthly average limit in the current permit (anti-backsliding rule).

5.4.5 Section 404 permits

No TSS WLAs were set aside for Section 404 Permits. The State will use its Section 401 Certification authority to ensure Section 404 Permits protect Oklahoma WQS and comply with TSS TMDLs in this report. Section 401 Certification will be conditioned to meet one of the following two conditions to be certified by the State:

- Include TSS limits in the certificate and establish a monitoring requirement to ensure compliance with turbidity standards and TSS TMDLs, or
- Submit to DEQ a BMP turbidity reduction plan which should include all practicable turbidity control techniques. The turbidity reduction plan must be approved first before a Section 401 Certification can be issued.

Compliance with the Section 401 Certification condition will be considered compliance with this TMDL.

5.5 Load Allocation

As discussed in Section 3.3, nonpoint source loading to each waterbody emanates from a number of different sources. The data analysis and the LDCs indicate that exceedances for each waterbody are the result of a variety of nonpoint source loading. The LAs for each bacterial indicator in waterbodies not supporting the PBCR use are calculated as the difference between the TMDL, MOS, and WLA, as follows:

$$LA = TMDL - WLA_{WWTF} - WLA_{MS4} - WLA_{Growth} - MOS$$

The following equation is used to calculate the LA for TSS:

$$LA = TMDL - WLA_{WWTF} - WLA_{MS4} - WLA_{Growth} - MOS$$

5.6 Seasonal Variability

Federal regulations (40 CFR § Part 130.7(c)(1)) require that TMDLs account for seasonal variation in watershed conditions and pollutant loading. The bacterial TMDLs established in this report adhere to the seasonal application of the Oklahoma WQS which limits the PBCR use to the period of May 1st through September 30th. The turbidity TMDLs established in this report adhere to the seasonal application of the Oklahoma WQS for turbidity, which applies to seasonal base flow conditions only. Seasonal variation was also accounted for in these TMDLs by using five years of water quality data and by using the longest period of USGS flow records when estimating flows to develop flow exceedance percentiles.

5.7 Margin of Safety

Federal regulations (40 CFR § Part 130.7(c)(1)) require that TMDLs include an MOS. The MOS is a conservative measure incorporated into the TMDL equation that accounts for the lack of knowledge associated with calculating the allowable pollutant loading to ensure

WQSs are attained. EPA guidance allows for use of implicit or explicit expressions of the MOS, or both. For bacterial TMDLs, an explicit MOS was set at 10%.

For turbidity, the TMDLs are calculated for TSS instead of turbidity. Thus, the quality of the regression has a direct impact on confidence of the TMDL calculations. The better the regression is, the more confidence there is in the TMDL targets. As a result, it leads to a smaller MOS. The selection of MOS is based on the NRMSE for each waterbody. The explicit MOS ranged from 10% to 25%. **Table 5-2** shows the MOS for each waterbody.

5.8 TMDL Calculations

The TMDLs for the 303(d)-listed waterbodies covered in this report were derived using LDCs. A TMDL is expressed as the sum of all WLAs (point source loads), LAs (nonpoint source loads), and an appropriate MOS, which attempts to account for the lack of knowledge concerning the relationship between pollutant loading and water quality.

This definition can be expressed by the following equation:

$$TMDL = \Sigma WLA + LA + MOS$$

The TMDL represents a continuum of desired load over all flow conditions, rather than fixed at a single value, because loading capacity varies as a function of the flow present in the stream. The higher the flow is, the more wasteload the stream can handle without violating WQS. Regardless of the magnitude of the WLA calculated in these TMDLs, future new discharges or increased load from existing discharges will be considered consistent with the TMDL provided the OPDES permit requires in-stream criteria to be met.

The TMDL, WLA, LA, and MOS will vary with flow condition, and are calculated at every 5th flow interval percentile. **Table 5-6** and **Table 5-7** summarize the TMDL, WLA, LA and MOS loadings at the 50% flow percentile. **Table 5-8** through **Table 5-10** summarize the allocations for indicator bacteria. The bacterial TMDLs calculated in these tables apply to the recreation season (May 1 through September 30) only. **Table 5-11** to **Table 5-17** present the allocations for total suspended solids.

Table 5-6 Summaries of Bacterial TMDLs

Stream Name	Waterbody ID	Pollutant	TMDL (colonies /day)	WLA _{WWTF} (colonies /day)	WLA _{MS4} (colonies /day)	WLA _{Growth} (colonies /day)	LA (colonies /day)	MOS (colonies /day)
Poteau River	OK220100010010_00	ENT	4.58E+11	2.75E+09	3.86E+09	4.58E+10	3.60E+11	4.58E+10
Poteau River	OK220100020010_10	ENT	4.57E+10	9.12E+08	0.00E+00	4.57E+09	4.02E+10	4.57E+09
Poteau River	OK220100020010_10	EC	1.75E+11	3.48E+09	0.00E+00	1.75E+10	1.36E+11	1.75E+10

Table 5-7 Summaries of TSS TMDLs

Waterbody ID and Waterbody Name	Pollutant	TMDL (lbs/day)	WLA _{WWTF} (lbs/day)	WLA _{MS4} (lbs/day)	WLA _{Growth} (lbs/day)	LA (lbs/day)	MOS (lbs/day)
OK220600010100_20 Mill Creek	TSS	152.9	0	0	1.5	120.8	30.6
OK220600030010_00 Brushy Creek	TSS	1,728.2	0	0	17.3	1,365.3	345.6
OK220600040030_00 Beaver Creek	TSS	824.6	0	0	8.2	733.9	82.5
OK410210020150_00 Terrapin Creek	TSS	719.1	0	0	7.2	604.1	107.9
OK410400010010_20 Red River	TSS	1,149,183.6	0	0	11,491.8	1,022,773.4	114,918.4
OK410400020200_00 Caney Creek	TSS	425.7	0	0	4.3	315.0	106.4
OK410400080010_00 North Boggy Creek	TSS	549.7	0	0	5.5	434.3	109.9

**Table 5-8 Enterococci TMDL Calculations for Poteau River
(OK220100010010_00)**

Percentile	Flow (cfs)	TMDL (colonies /day)	WLA _{WWTF} (colonies /day)	WLA _{MS4} (colonies /day)	WLA _{Growth} (colonies /day)	LA (colonies /day)	MOS (colonies /day)
				Arkoma			
0	67,003.4	5.41E+13	2.75E+09	4.59E+11	5.41E+12	4.28E+13	5.41E+12
5	8,103.4	6.54E+12	2.75E+09	5.55E+10	6.54E+11	5.18E+12	6.54E+11
10	6,843.4	5.53E+12	2.75E+09	4.68E+10	5.53E+11	4.37E+12	5.53E+11
15	5,683.9	4.59E+12	2.75E+09	3.89E+10	4.59E+11	3.63E+12	4.59E+11
20	4,407.4	3.56E+12	2.75E+09	3.01E+10	3.56E+11	2.81E+12	3.56E+11
25	3,273.4	2.64E+12	2.75E+09	2.24E+10	2.64E+11	2.09E+12	2.64E+11
30	2,443.4	1.97E+12	2.75E+09	1.67E+10	1.97E+11	1.56E+12	1.97E+11
35	1,773.4	1.43E+12	2.75E+09	1.21E+10	1.43E+11	1.13E+12	1.43E+11
40	1,283.4	1.04E+12	2.75E+09	8.76E+09	1.04E+11	8.17E+11	1.04E+11
45	888.4	7.17E+11	2.75E+09	6.05E+09	7.17E+10	5.65E+11	7.17E+10
50	567.4	4.58E+11	2.75E+09	3.86E+09	4.58E+10	3.60E+11	4.58E+10
55	344.3	2.78E+11	2.75E+09	2.33E+09	2.78E+10	2.17E+11	2.78E+10
60	217.4	1.76E+11	2.75E+09	1.46E+09	1.76E+10	1.36E+11	1.76E+10
65	149.4	1.21E+11	2.75E+09	9.94E+08	1.21E+10	9.28E+10	1.21E+10
70	108.4	8.75E+10	2.75E+09	7.13E+08	8.75E+09	6.66E+10	8.75E+09
75	77.4	6.25E+10	2.75E+09	5.01E+08	6.25E+09	4.67E+10	6.25E+09
80	57.4	4.63E+10	2.75E+09	3.64E+08	4.63E+09	3.40E+10	4.63E+09
85	42.7	3.45E+10	2.75E+09	2.63E+08	3.45E+09	2.46E+10	3.45E+09
90	30.4	2.45E+10	2.75E+09	1.79E+08	2.45E+09	1.67E+10	2.45E+09
95	20.4	1.65E+10	2.75E+09	1.11E+08	1.65E+09	1.03E+10	1.65E+09
100	3.8	3.07E+09	2.75E+09	0.00E+00	1.45E+07	0.00E+00	3.07E+08

**Table 5-9 Enterococci TMDL Calculations for Poteau River
(OK220100020010_10)**

Percentile	Flow (cfs)	TMDL (colonies /day)	WLA _{WWTF} (colonies /day)	WLA _{MS4} (colonies /day)	WLA _{Growth} (colonies /day)	LA (colonies /day)	MOS (colonies /day)
0	28,101.1	2.27E+13	9.12E+08	0.00E+00	2.27E+12	2.04E+13	2.27E+12
5	1,481.1	1.20E+12	9.12E+08	0.00E+00	1.20E+11	1.08E+12	1.20E+11
10	799.5	6.46E+11	9.12E+08	0.00E+00	6.46E+10	5.80E+11	6.46E+10
15	502.1	4.05E+11	9.12E+08	0.00E+00	4.05E+10	3.64E+11	4.05E+10
20	344.1	2.78E+11	9.12E+08	0.00E+00	2.78E+10	2.49E+11	2.78E+10
25	244.6	1.98E+11	9.12E+08	0.00E+00	1.98E+10	1.77E+11	1.98E+10
30	177.1	1.43E+11	9.12E+08	0.00E+00	1.43E+10	1.28E+11	1.43E+10
35	133.1	1.07E+11	9.12E+08	0.00E+00	1.07E+10	9.58E+10	1.07E+10
40	100.6	8.12E+10	9.12E+08	0.00E+00	8.12E+09	7.22E+10	8.12E+09
45	75.1	6.07E+10	9.12E+08	0.00E+00	6.07E+09	5.37E+10	6.07E+09
50	56.6	4.57E+10	9.12E+08	0.00E+00	4.57E+09	4.02E+10	4.57E+09
55	43.1	3.48E+10	9.12E+08	0.00E+00	3.48E+09	3.04E+10	3.48E+09
60	31.7	2.56E+10	9.12E+08	0.00E+00	2.56E+09	2.21E+10	2.56E+09
65	22.7	1.84E+10	9.12E+08	0.00E+00	1.84E+09	1.56E+10	1.84E+09
70	15.4	1.25E+10	9.12E+08	0.00E+00	1.25E+09	1.03E+10	1.25E+09
75	10.5	8.45E+09	9.12E+08	0.00E+00	8.45E+08	6.69E+09	8.45E+08
80	7.7	6.22E+09	9.12E+08	0.00E+00	6.22E+08	4.69E+09	6.22E+08
85	5.4	4.38E+09	9.12E+08	0.00E+00	4.38E+08	3.03E+09	4.38E+08
90	3.9	3.17E+09	9.12E+08	0.00E+00	3.17E+08	1.94E+09	3.17E+08
95	2.6	2.12E+09	9.12E+08	0.00E+00	2.12E+08	9.98E+08	2.12E+08
100	1.1	9.12E+08	9.12E+08	0.00E+00	0.00E+00	0.00E+00	0.00E+00

**Table 5-10 *E. coli* TMDL Calculations for the Poteau River
(OK220100020010_10)**

Percentile	Flow (cfs)	TMDL (colonies /day)	WLA _{WWTF} (colonies /day)	WLA _{MS4} (colonies /day)	WLA _{Growth} (colonies /day)	LA (colonies /day)	MOS (colonies /day)
0	28,101.1	8.66E+13	3.48E+09	0.00E+00	8.66E+12	6.93E+13	8.66E+12
5	1,481.1	4.57E+12	3.48E+09	0.00E+00	4.57E+11	3.65E+12	4.57E+11
10	799.5	2.46E+12	3.48E+09	0.00E+00	2.46E+11	1.97E+12	2.46E+11
15	502.1	1.55E+12	3.48E+09	0.00E+00	1.55E+11	1.23E+12	1.55E+11
20	344.1	1.06E+12	3.48E+09	0.00E+00	1.06E+11	8.45E+11	1.06E+11
25	244.6	7.54E+11	3.48E+09	0.00E+00	7.54E+10	6.00E+11	7.54E+10
30	177.1	5.46E+11	3.48E+09	0.00E+00	5.46E+10	4.33E+11	5.46E+10
35	133.1	4.10E+11	3.48E+09	0.00E+00	4.10E+10	3.25E+11	4.10E+10
40	100.6	3.10E+11	3.48E+09	0.00E+00	3.10E+10	2.45E+11	3.10E+10
45	75.1	2.32E+11	3.48E+09	0.00E+00	2.32E+10	1.82E+11	2.32E+10
50	56.6	1.75E+11	3.48E+09	0.00E+00	1.75E+10	1.36E+11	1.75E+10
55	43.1	1.33E+11	3.48E+09	0.00E+00	1.33E+10	1.03E+11	1.33E+10
60	31.7	9.78E+10	3.48E+09	0.00E+00	9.78E+09	7.48E+10	9.78E+09
65	22.7	7.01E+10	3.48E+09	0.00E+00	7.01E+09	5.26E+10	7.01E+09
70	15.4	4.76E+10	3.48E+09	0.00E+00	4.76E+09	3.46E+10	4.76E+09
75	10.5	3.23E+10	3.48E+09	0.00E+00	3.23E+09	2.23E+10	3.23E+09
80	7.7	2.38E+10	3.48E+09	0.00E+00	2.38E+09	1.55E+10	2.38E+09
85	5.4	1.67E+10	3.48E+09	0.00E+00	1.67E+09	9.91E+09	1.67E+09
90	3.9	1.21E+10	3.48E+09	0.00E+00	1.21E+09	6.21E+09	1.21E+09
95	2.6	8.11E+09	3.48E+09	0.00E+00	8.11E+08	3.00E+09	8.11E+08
100	1.1	3.48E+09	3.48E+09	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 5-11 Total Suspended Solids TMDL Calculations for the Mill Creek (OK220600010100_20)

Percentile	Flow (cfs)	TMDL (lb/day)	WLA (lb/day)			LA (lb/day)	MOS (lb/day)
			WWTF	MS4	Future Growth		
0	396.9	NA	0.0	0.0	NA	NA	NA
5	22.6	NA	0.0	0.0	NA	NA	NA
10	13.0	NA	0.0	0.0	NA	NA	NA
15	9.3	NA	0.0	0.0	NA	NA	NA
20	7.1	NA	0.0	0.0	NA	NA	NA
25	5.7	371.6	0.0	0.0	3.7	293.5	74.3
30	4.7	304.3	0.0	0.0	3.0	240.4	60.9
35	3.9	254.6	0.0	0.0	2.5	201.2	50.9
40	3.3	212.7	0.0	0.0	2.1	168.1	42.5
45	2.8	179.6	0.0	0.0	1.8	141.9	35.9
50	2.4	152.9	0.0	0.0	1.5	120.8	30.6
55	2.0	131.7	0.0	0.0	1.3	104.1	26.3
60	1.7	112.9	0.0	0.0	1.1	89.2	22.6
65	1.5	96.7	0.0	0.0	1.0	76.4	19.3
70	1.3	83.9	0.0	0.0	0.8	66.2	16.8
75	1.1	71.4	0.0	0.0	0.7	56.4	14.3
80	0.9	59.0	0.0	0.0	0.6	46.6	11.8
85	0.7	47.0	0.0	0.0	0.5	37.2	9.4
90	0.6	37.6	0.0	0.0	0.4	29.7	7.5
95	0.4	26.8	0.0	0.0	0.3	21.2	5.4
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0

NA = Not Applicable

Table 5-12 Total Suspended Solids TMDL Calculations for the Brushy Creek (OK220600030010_00)

Percentile	Flow (cfs)	TMDL (lb/day)	WLA (lb/day)			LA (lb/day)	MOS (lb/day)
			WWTF	MS4	Future Growth		
0	13,856.6	NA	0.0	0.0	NA	NA	NA
5	1,422.8	NA	0.0	0.0	NA	NA	NA
10	660.7	NA	0.0	0.0	NA	NA	NA
15	385.9	NA	0.0	0.0	NA	NA	NA
20	233.2	NA	0.0	0.0	NA	NA	NA
25	149.0	10,448.7	0.0	0.0	104.5	8,254.5	2,089.7
30	96.9	6,792.7	0.0	0.0	67.9	5,366.2	1,358.5
35	65.4	4,586.7	0.0	0.0	45.9	3,623.5	917.3
40	45.6	3,198.9	0.0	0.0	32.0	2,527.1	639.8
45	32.9	2,308.2	0.0	0.0	23.1	1,823.5	461.6
50	24.6	1,728.2	0.0	0.0	17.3	1,365.3	345.6
55	18.7	1,313.9	0.0	0.0	13.1	1,038.0	262.8
60	14.6	1,023.9	0.0	0.0	10.2	808.9	204.8
65	11.7	820.9	0.0	0.0	8.2	648.5	164.2
70	9.9	692.5	0.0	0.0	6.9	547.1	138.5
75	8.3	580.6	0.0	0.0	5.8	458.7	116.1
80	6.9	485.4	0.0	0.0	4.9	383.4	97.1
85	5.7	402.5	0.0	0.0	4.0	318.0	80.5
90	3.9	272.0	0.0	0.0	2.7	214.9	54.4
95	2.4	166.4	0.0	0.0	1.7	131.4	33.3
100	1.9	133.2	0.0	0.0	1.3	105.2	26.6

NA = Not Applicable

Table 5-13 Total Suspended Solids TMDL Calculations for the Beaver Creek (OK220600040030_00)

Percentile	Flow (cfs)	TMDL (lb/day)	WLA (lb/day)			LA (lb/day)	MOS (lb/day)
			WWTF	MS4	Future Growth		
0	772.0	NA	0.0	0.0	NA	NA	NA
5	106.7	NA	0.0	0.0	NA	NA	NA
10	56.4	NA	0.0	0.0	NA	NA	NA
15	30.3	NA	0.0	0.0	NA	NA	NA
20	18.9	NA	0.0	0.0	NA	NA	NA
25	13.6	3,594.4	0.0	0.0	35.9	3,199.0	359.4
30	10.0	2,642.9	0.0	0.0	26.4	2,352.2	264.3
35	7.5	1,987.5	0.0	0.0	19.9	1,768.9	198.7
40	5.6	1,492.0	0.0	0.0	14.9	1,327.9	149.2
45	4.3	1,145.3	0.0	0.0	11.5	1,019.3	114.5
50	3.1	824.6	0.0	0.0	8.2	733.9	82.5
55	2.3	599.1	0.0	0.0	6.0	533.2	59.9
60	1.6	426.4	0.0	0.0	4.3	379.5	42.6
65	1.1	290.8	0.0	0.0	2.9	258.8	29.1
70	0.7	197.3	0.0	0.0	2.0	175.6	19.7
75	0.5	133.2	0.0	0.0	1.3	118.6	13.3
80	0.3	87.7	0.0	0.0	0.9	78.1	8.8
85	0.2	49.7	0.0	0.0	0.5	44.2	5.0
90	0.1	25.4	0.0	0.0	0.3	22.6	2.5
95	0.03	8.5	0.0	0.0	0.1	7.5	0.8
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0

NA = Not Applicable

Table 5-14 Total Suspended Solids TMDL Calculations for the Terrapin Creek (OK410210020150_00)

Percentile	Flow (cfs)	TMDL (lb/day)	WLA (lb/day)			LA (lb/day)	MOS (lb/day)
			WWTF	MS4	Future Growth		
0	9,375.5	NA	0.0	0.0	NA	NA	NA
5	367.3	NA	0.0	0.0	NA	NA	NA
10	188.9	NA	0.0	0.0	NA	NA	NA
15	123.6	NA	0.0	0.0	NA	NA	NA
20	89.9	NA	0.0	0.0	NA	NA	NA
25	69.2	2,237.4	0.0	0.0	22.4	1,879.4	335.6
30	55.3	1,786.5	0.0	0.0	17.9	1,500.6	268.0
35	44.0	1,421.2	0.0	0.0	14.2	1,193.8	213.2
40	35.5	1,147.2	0.0	0.0	11.5	963.7	172.1
45	28.4	918.9	0.0	0.0	9.2	771.9	137.8
50	22.2	719.1	0.0	0.0	7.2	604.1	107.9
55	17.0	547.9	0.0	0.0	5.5	460.3	82.2
60	12.0	388.1	0.0	0.0	3.9	326.0	58.2
65	8.7	279.7	0.0	0.0	2.8	234.9	42.0
70	5.5	176.9	0.0	0.0	1.8	148.6	26.5
75	3.4	108.4	0.0	0.0	1.1	91.1	16.3
80	1.9	62.8	0.0	0.0	0.6	52.7	9.4
85	1.1	36.2	0.0	0.0	0.4	30.4	5.4
90	0.5	16.6	0.0	0.0	0.2	13.9	2.5
95	0.2	5.4	0.0	0.0	0.1	4.6	0.8
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0

NA = Not Applicable

Table 5-15 Total Suspended Solids TMDL Calculations for the Red River (OK410400010010_20)

Percentile	Flow (cfs)	TMDL (lb/day)	WLA (lb/day)			LA (lb/day)	MOS (lb/day)
			WWTF	MS4	Future Growth		
0	388,000.0	NA	0.0	0.0	NA	NA	NA
5	37,700.0	NA	0.0	0.0	NA	NA	NA
10	23,620.0	NA	0.0	0.0	NA	NA	NA
15	16,300.0	NA	0.0	0.0	NA	NA	NA
20	12,100.0	NA	0.0	0.0	NA	NA	NA
25	9,290.0	2,702,763.5	0.0	0.0	27,027.6	2,405,459.5	270,276.3
30	7,390.0	2,149,991.6	0.0	0.0	21,499.9	1,913,492.5	214,999.2
35	6,150.0	1,789,235.2	0.0	0.0	17,892.4	1,592,419.4	178,923.5
40	5,240.0	1,524,486.6	0.0	0.0	15,244.9	1,356,793.1	152,448.7
45	4,530.0	1,317,924.5	0.0	0.0	13,179.2	1,172,952.8	131,792.4
50	3,950.0	1,149,183.6	0.0	0.0	11,491.8	1,022,773.4	114,918.4
55	3,490.0	1,015,354.6	0.0	0.0	10,153.5	903,665.6	101,535.5
60	3,080.0	896,072.3	0.0	0.0	8,960.7	797,504.3	89,607.2
65	2,740.0	797,155.2	0.0	0.0	7,971.6	709,468.1	79,715.5
70	2,420.0	704,056.8	0.0	0.0	7,040.6	626,610.5	70,405.7
75	2,080.0	605,139.7	0.0	0.0	6,051.4	538,574.4	60,514.0
80	1,740.0	506,222.7	0.0	0.0	5,062.2	450,538.2	50,622.3
85	1,380.0	401,486.9	0.0	0.0	4,014.9	357,323.4	40,148.7
90	1,030.0	299,660.5	0.0	0.0	2,996.6	266,697.9	29,966.1
95	624.0	181,541.9	0.0	0.0	1,815.4	161,572.3	18,154.2
100	134.0	38,985.0	0.0	0.0	389.8	34,696.6	3,898.5

NA = Not Applicable

Table 5-16 Total Suspended Solids TMDL Calculations for the Caney Creek (OK410400020200_00)

Percentile	Flow (cfs)	TMDL (lb/day)	WLA (lb/day)			LA (lb/day)	MOS (lb/day)
			WWTF	MS4	Future Growth		
0	1,431.8	NA	0.0	0.0	NA	NA	NA
5	151.8	NA	0.0	0.0	NA	NA	NA
10	71.5	NA	0.0	0.0	NA	NA	NA
15	38.1	NA	0.0	0.0	NA	NA	NA
20	22.4	NA	0.0	0.0	NA	NA	NA
25	15.5	1,840.9	0.0	0.0	18.4	1,362.3	460.2
30	11.0	1,307.1	0.0	0.0	13.1	967.2	326.8
35	8.2	972.2	0.0	0.0	9.7	719.5	243.1
40	6.3	742.1	0.0	0.0	7.4	549.2	185.5
45	4.8	569.4	0.0	0.0	5.7	421.4	142.4
50	3.6	425.7	0.0	0.0	4.3	315.0	106.4
55	2.8	327.9	0.0	0.0	3.3	242.7	82.0
60	2.3	269.2	0.0	0.0	2.7	199.2	67.3
65	1.9	222.6	0.0	0.0	2.2	164.8	55.7
70	1.5	180.4	0.0	0.0	1.8	133.5	45.1
75	1.3	149.0	0.0	0.0	1.5	110.3	37.3
80	1.1	124.8	0.0	0.0	1.2	92.4	31.2
85	0.9	103.6	0.0	0.0	1.0	76.6	25.9
90	0.6	68.5	0.0	0.0	0.7	50.7	17.1
95	0.2	29.5	0.0	0.0	0.3	21.8	7.4
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0

NA = Not Applicable

Table 5-17 Total Suspended Solids TMDL Calculations for the North Boggy Creek (OK410400080010_00)

Percentile	Flow (cfs)	TMDL (lb/day)	WLA (lb/day)			LA (lb/day)	MOS (lb/day)
			WWTF	MS4	Future Growth		
0	5,219.7	NA	0.0	0.0	NA	NA	NA
5	536.4	NA	0.0	0.0	NA	NA	NA
10	248.2	NA	0.0	0.0	NA	NA	NA
15	144.7	NA	0.0	0.0	NA	NA	NA
20	86.8	NA	0.0	0.0	NA	NA	NA
25	55.2	3,568.9	0.0	0.0	35.7	2,819.4	713.8
30	35.7	2,309.7	0.0	0.0	23.1	1,824.7	461.9
35	23.9	1,547.0	0.0	0.0	15.5	1,222.1	309.4
40	16.4	1,057.7	0.0	0.0	10.6	835.6	211.5
45	11.7	755.5	0.0	0.0	7.6	596.9	151.1
50	8.5	549.7	0.0	0.0	5.5	434.3	109.9
55	6.3	408.0	0.0	0.0	4.1	322.3	81.6
60	4.8	309.4	0.0	0.0	3.1	244.4	61.9
65	3.7	237.4	0.0	0.0	2.4	187.6	47.5
70	3.0	193.6	0.0	0.0	1.9	152.9	38.7
75	2.4	154.7	0.0	0.0	1.5	122.2	30.9
80	1.9	122.3	0.0	0.0	1.2	96.6	24.5
85	1.4	93.5	0.0	0.0	0.9	73.9	18.7
90	0.7	46.1	0.0	0.0	0.5	36.4	9.2
95	0.2	11.5	0.0	0.0	0.1	9.1	2.3
100	0.0	0.0	0.0	0.0	0.0	0.0	0.0

NA = Not Applicable

5.9 Strength and Weakness

Strength: The LDC is a simple and efficient method to show the relationship between flow and pollutant load. Therefore, it facilitates rapid development of TMDLs and provides some information for identifying whether impairments are associated with point or nonpoint sources. The low cost of the LDC method allows accelerated development of TMDL plans on more waterbodies and the evaluation of the implementation of WLAs and BMPs.

Weakness: LDCs graphically display the changing water quality over changing flows that may not be apparent when visualizing raw data. Flow range is only a general indicator of the relative proportion of point/nonpoint contributions. LDCs cannot identify nonpoint sources as entering a waterbody at a specific location. Therefore, the specific control actions cannot be stipulated.

5.10 TMDL Implementation

DEQ will collaborate with a host of other state agencies and local governments working within the boundaries of state and local regulations to target available funding and technical assistance to support implementation of pollution controls and management measures. Various water quality management programs and funding sources will be utilized so that the pollutant reductions as required by these TMDLs can be achieved and water quality can be restored to maintain designated uses. DEQ's Continuing Planning Process (CPP), required by the CWA §303(e)(3) and 40 CFR § Part 130.5, summarizes Oklahoma's commitments and programs aimed at restoring and protecting water quality throughout the State (DEQ 2012). The CPP can be viewed at DEQ's website: <https://www.deq.ok.gov/wp-content/uploads/water-division/2012-OK-CPP.pdf>. **Table 5-18** provides a partial list of the state partner agencies. DEQ will collaborate with to address point and nonpoint source reduction goals established by TMDLs.

Table 5-18 Partial List of Oklahoma Water Quality Management Agencies

Agency	Web Link
Oklahoma Conservation Commission	https://conservation.ok.gov/water-quality-division/
Oklahoma Department of Wildlife Conservation	https://www.wildlifedepartment.com/hunting/research
Oklahoma Department of Agriculture, Food, and Forestry	https://ag.ok.gov/divisions/agricultural-environmental-management/
Oklahoma Water Resources Board	https://oklahoma.gov/owrb/data-and-maps/monitoring-data.html

5.9.1 Point Sources

Point source WLAs are outlined in the Oklahoma Water Quality Management Plan (aka the 208 Plan) under the OPDES program.

5.9.2 Nonpoint Sources

Nonpoint source pollution in Oklahoma is managed by the Oklahoma Conservation Commission. The Oklahoma Conservation Commission works with other agencies that collect water monitoring information and/or address water quality problems associated with nonpoint source pollution. These agencies at the State level are DEQ, OWRB, Corporation Commission (for oil & gas activities), and ODAFF [they are the NPDES-permitting authority for CAFOs and SFOs in Oklahoma under what ODAFF calls the [Agriculture Pollutant Discharge Elimination System \(AgPDES\)](#)]. The agencies at the Federal level are EPA, USGS, U.S. Army Corps of Engineers (USACE) & the National Resources Conservation Service (NRCS) of the U.S. Department of Agriculture (USDA). The primary mechanisms used for management of nonpoint source pollution are incentive-based programs that support the installation of BMPs and public education and outreach.

The reduction rates called for in this TMDL report are as high as 91.9% for bacteria and 80.1% for TSS. DEQ recognizes that achieving such high reductions will be a challenge, especially since unregulated nonpoint sources are a major cause of bacterial and TSS loadings. The high reduction rates are not uncommon for pathogen- or TSS-impaired waters. Similar reduction rates are often found in other pathogen and TSS TMDLs around the nation. The suitability of the current criteria for pathogens and the beneficial uses of a waterbody should be reviewed. For example, the Kansas Department of Health and Environment proposed to exclude certain high flow conditions during which pathogen standards will not apply though that exclusion was not approved by the EPA. Additionally, EPA has been conducting new epidemiology studies and may develop new recommendations for pathogen criteria in the future.

Revisions to the current pathogen provisions of Oklahoma's WQSs should be considered. There are some basic approaches that may apply to such revisions.

- **Remove the PBCR use:** This revision would require documentation in a Use Attainability Analysis that the use is not an existing use and cannot be attained. It is unlikely that this approach would be successful since there is evidence that people swim in bacterially-impaired waterbodies, thus constituting an existing use. Existing uses cannot be removed.
- **Modify application of the existing criteria:** This approach would include considerations such as an exemption under certain high flow conditions, an allowance for wildlife or "natural conditions," a sub-category of the use or other special provision for urban areas, or other special provisions for storm flows. Since large bacterial violations occur over all flow ranges, it is likely that large reductions would still be necessary. However, this approach may have merit and should be considered.
- **Revise the existing numeric criteria:** Oklahoma's current pathogen criteria, revised in 2011, are based on EPA guidelines (See the *2012 Draft Recreational Water Quality Criteria*, December 2011; Implementation Guidance for

Ambient Water Quality Criteria for Bacteria, May 2002 Draft; and Ambient Water Quality Criteria for Bacteria-1986, January 1986). However, those guidelines have received much criticism and EPA studies that could result in revisions to their recommendations are ongoing. The numeric criteria values should also be evaluated using a risk-based method such as that found in EPA guidance.

Unless or until the WQSs are revised and approved by EPA, federal rules require that the TMDLs in this report must be based on attainment of the current standards. If revisions to the pathogen standards are approved in the future, reductions specified in these TMDLs will be re-evaluated.

5.11 Reasonable Assurances

Reasonable assurance is required by the EPA guidance for a TMDL to be approvable only when a waterbody is impaired by both point and nonpoint sources and where a point source is given a less stringent wasteload allocation based on an assumption that nonpoint source load reductions will occur. In such a case, “reasonable assurance” that the NPS load reductions will actually occur must be demonstrated. In this report, all point source discharges either already have or will be given discharge limitations less than or equal to the water quality standards numerical criteria. Therefore, reasonable assurance is derived from Oklahoma Pollutant Discharge Elimination System (OPDES). The wasteload allocations for MS4s will be implemented through the OPDES MS4 permits. MS4 permits contain specific requirements for the regulated communities/facilities to establish a comprehensive stormwater management program (SWMP) or stormwater pollution prevention plan (SWP3) to implement best management practices (BMPs), public education and outreach, and illicit discharge elimination.

Reasonable assurance that nonpoint sources will meet their allocated amount in the TMDL is dependent upon the availability and implementation of nonpoint source pollutant reduction plans, controls or BMPs within the watershed. The OCC has responsibilities for the state's NPS program defined in Section 319 of CWA. DEQ will work in conjunction with OCC and other federal, state, and local partners to meet the load reduction goals for NPS. All waterbodies are prioritized as part of the Unified Watershed Assessment (UWA) and that ranking will determine the likelihood of an implementation project in a watershed.

SECTION 6 PUBLIC PARTICIPATION

This TMDL report has been preliminary reviewed by EPA. After EPA reviewed this draft TMDL report, DEQ was given approval to submit this report for public notice. A public notice will be sent to local newspapers, to stakeholders in the Study Area affected by these draft TMDLs, and to stakeholders who have requested all copies of TMDL public notices. The public notice will also be posted at the DEQ website: <http://www.deq.state.ok.us/wqdnew/index.htm>.

The public comment period lasts 45 days. During that time, the public has the opportunity to review the TMDL report and make written comments. Depending on the interest and responses from the public, a public meeting may be held within the watershed affected by the TMDLs in this report. If a public meeting is held, the public will also have opportunities to ask questions and make formal oral comments at the meeting and/or to submit written comments at the public meeting.

All written comments received during the public notice period become a part of the record of these TMDLs. All comments will be considered and the TMDL report will be revised according to the comments, if necessary, prior to the ultimate completion of these TMDLs for submission to EPA for final approval.

After EPA's final approval, the TMDLs and 208 Factsheet will be adopted into the Water Quality Management Plan (WQMP).

SECTION 7 REFERENCES

- American Veterinary Medical Association (2012). *U.S. pet ownership and demographics sourcebook*. Schaumburg, IL. Available from <https://www.avma.org/resources-tools/reports-statistics/us-pet-ownership-statistics#companion>.
- Arnold, S.D. and Meister, E.A. (1999). Dairy feedlot contributions to groundwater contamination: A preliminary study in New Mexico. *Journal of Environmental Health*, Vol.62, No.2. Retrieved from <https://www.jstor.org/stable/44527713?seq=1>.
- ASAE (American Society of Agricultural Engineers) (1999). ASAE standards, 46th edition: Standards, Engineering Practices, Data. St. Joseph, MI.
- Brown, R.B. and Bicki, T.J. (1987). On-site sewage disposal - influence of system densities on water quality. Notes in Soil Science No. 31. Soil Science Department, G-159 McCarty Hall, Institute of Food and Agricultural Sciences, University of Florida, Gainesville, Florida.
- Canter, L.W. and Knox, R.C. (1984). *Evaluation of septic tank system effects on ground water quality*. (EPA Publication No. 600/S2-84-107). Available from <https://nepis.epa.gov/Exe/ZyPDF.cgi/9101LYBI.PDF?Dockey=9101LYBI.PDF>.
- Christensen, V. G., Jian, X., and Ziegler, A. C. (2000). *Regression Analysis and real-time water-quality monitoring to estimate constituent concentrations, loads, and yields in the Little Arkansas River, south-central Kansas, 1995-99* (DOI: 10.3133/wri004126). U.S. Department of the Interior, U.S. Geological Survey. Available from <https://pubs.er.usgs.gov/publication/wri004126>.
- Clean Water Act (aka Water Pollution Prevention and Control), Title 33, Chapter 26, §§ 1251 - 1388. (2014). Retrieved from <https://www.gpo.gov/fdsys/pkg/USCODE-2014-title33/pdf/USCODE-2014-title33-chap26.pdf>.
- Cogger, C.G. and Carlile, B.L. (1984, January). Field performance of conventional and alternative septic systems in wet soils. *J. Environ. Qual.* 13 (1), 137-142.
- DEQ (2012). *The State of Oklahoma 2012 Continuing Planning Process*. Retrieved from <https://www.deq.ok.gov/wp-content/uploads/water-division/2012-OK-CPP.pdf>.
- DEQ (2015). *Oklahoma Pollutant Discharge Elimination System (OPDES) Standards (Chapter 606)*. Retrieved from <https://www.deq.ok.gov/wp-content/uploads/deqmainresources/606.pdf>
- DEQ (2016). *Oklahoma DEQ GIS maps and data*. Available from <http://deq.maps.arcgis.com/home/index.html>.
- DEQ (2022). *General Permit OKR10 for stormwater discharges from construction activities within the State of Oklahoma*. October 18, 2017. Retrieved from <https://www.deq.ok.gov/wp-content/uploads/water-division/OKR10-permit-mod2-final-1.pdf>
- DEQ (2022). *OPDES Multi-Sector General Permit OKR05 for Stormwater Discharges from Industrial Activity within the State of Oklahoma*. July 5, 2017. Available from https://www.deq.ok.gov/wp-content/uploads/water-division/2022-OKR05_Modified_Permit_11-2023.pdf.
- DEQ (2018). General Permit No OKG950000: *General wastewater permit for rock, sand and gravel quarries (excluding dredging operations) and stone cutting facilities; to construct or operate industrial*

- wastewater impoundments; and/or to land apply industrial wastewater for dust suppression; and/or to recycle wastewater as wash water or cooling water. Available from <https://www.deq.ok.gov/wp-content/uploads/water-division/OKG95-Rock-Sand-and-Gravel-Quarry-General-Permit-and-Fact-Sheet.pdf>
- DEQ (2021). *Individual and small public on-site sewage treatment systems (Chapter 641)*. July 1, 2012. Retrieved from <https://www.deq.ok.gov/wp-content/uploads/deqmainresources/641.pdf>.
- DEQ (2022). Oklahoma 303(d) list of impaired waters. Found in Appendix C of the 2022 *Integrated Report*. Retrieved from https://www.deq.ok.gov/wp-content/uploads/water-division/OK_2022-Appendix-C-Final.pdf.
- DEQ (2022). Title 252, Chapter 730: *Oklahoma Water Quality Standards*. Available from <https://rules.ok.gov/home> under “Code”, Title 252, Chapter 730, Subchapter 5 (Surface Water Quality Standards), Part 3 (Beneficial Uses and Criteria to Protect Uses).
- DEQ (2022). Title 252, Chapter 740: *Implementation of Oklahoma's Water Quality Standards*. Available from <https://rules.ok.gov/home> under “Code”, Title 252, Chapter 740, Subchapter 15 (Use Support Assessment Protocols).
- Drapcho, C.M. and Hubbs, A.K.B. (2002). *Fecal Coliform concentration in runoff from fields with applied dairy manure*. Retrieved from http://water.usgs.gov/wrri/AnnualReports/2001/FY2001_LA_Annual_Report.pdf
- EPA (1983). *Results of the Nationwide Urban Runoff Program, Volume 1 - Final Report*, (EPA Publication No. WH-554). Retrieved from www.epa.gov/npdes/pubs/sw_nurp_vol_1_finalreport.pdf.
- EPA (1986). *Ambient water quality criteria for bacteria – 1986*. Office of Water, EPA 440/5-84-002. Retrieved from <https://www.epa.gov/sites/default/files/2019-03/documents/ambient-wqc-bacteria-1986.pdf>.
- EPA (1991). *Guidance for water quality-based decisions: The TMDL process*. (EPA Publication No. 440/4-91-001). Retrieved from <https://nepis.epa.gov/Exe/ZyPDF.cgi/00001KIO.PDF?Dockkey=00001KIO.PDF>.
- EPA (1991). *Technical support document for water quality-based toxics control*. Office of Water (EPA Publication No. 505/2-90-001). Retrieved from <http://nepis.epa.gov/Adobe/PDF/100002CU.PDF>.
- EPA (1997). *Compendium of tools for watershed assessment and TMDL development* (EPA Publication 841-B-97-006). Retrieved from <http://nepis.epa.gov/Exe/ZyPDF.cgi/20004NX4.PDF?Dockkey=20004NX4.PDF>.
- EPA (1999). *Guidance for water quality-based decisions: The TMDL process (Second edition)*. (EPA Publication No. 841-D-99-001). Retrieved from <http://nepis.epa.gov/Exe/ZyPDF.cgi/P1007N47.PDF?Dockkey=P1007N47.PDF>.
- EPA (2001). *Protocol for developing pathogen TMDLs: First edition* (EPA Publication No. 841-R-00-0002). Retrieved from <http://nepis.epa.gov/Exe/ZyPDF.cgi/20004QSZ.PDF?Dockkey=20004QSZ.PDF>.
- EPA (2003). *Watershed-based National Pollutant Discharge Elimination System (NPDES) permitting implementation guidance* (EPA Publication No. 833-B-03-004). Retrieved from www.epa.gov/sites/production/files/2015-09/documents/watershedpermitting_finalguidance.pdf.

- EPA (2005). *Guidance for 2006 assessment, listing and reporting requirements pursuant to Sections 303(d), 305(b), and 314 of the Clean Water Act*. , Office of Wetlands, Oceans, and Watersheds, From Diane Regas-- July 29, 2005.
- EPA (2005). *Stormwater Phase II final rule; Small MS4 stormwater program overview* (EPA Publication No. 833-F-00-002, Fact Sheet 2.0). Retrieved from <https://www.epa.gov/system/files/documents/2023-09/EPA-Stormwater-Phase-II-Final-Rule-Factsheet-2.0-Small-MS4-Overview.pdf>.
- EPA (2006). *Data quality assessment: Statistical methods for practitioners* (EPA Publication No. 240-B-06-003). Available from <https://www.epa.gov/quality/guidance-data-quality-assessment>.
- EPA (2007). *An approach for using load duration curves in the development of TMDLs* (EPA Publication 841-B-07-006). Retrieved from http://www.epa.gov/sites/production/files/2015-07/documents/2007_08_23_tmdl_duration_curve_guide_aug2007.pdf.
- EPA (2008). *TMDLs to stormwater permits draft handbook* (Draft, November, 2008). Retrieved from http://www.epa.gov/sites/production/files/2015-07/documents/tmdl-sw_permits11172008.pdf.
- EPA (2008). *Handbook for developing watershed TMDLs* (Draft, December 15, 2008). Retrieved from www.epa.gov/sites/production/files/2015-10/documents/2009_01_09_tmdl_draft_handbook.pdf
- EPA (2012). *Recreational water quality criteria*. Retrieved <https://www.epa.gov/sites/default/files/2015-10/documents/rwqc2012.pdf>.
- EPA (2014). *Protection of downstream waters in Water Quality Standards: Frequently asked questions*. Office of Water (EPA-Publication No. 820-F-14-001).
- EPA Administered Permit Programs: The National Pollutant Discharge Elimination System, 40 CFR § 122 (2015). Retrieved from <https://www.gpo.gov/fdsys/pkg/CFR-2015-title40-vol22/pdf/CFR-2015-title40-vol22-part122.pdf>.
- EPA State Program Requirements, 40 CFR § 123 (2015). Retrieved from <https://www.gpo.gov/fdsys/pkg/CFR-2015-title40-vol22/pdf/CFR-2015-title40-vol22-part123.pdf>.
- EPA Water Quality Planning and Management, 40 CFR § 130 (2015). Retrieved from <https://www.gpo.gov/fdsys/pkg/CFR-2015-title40-vol22/pdf/CFR-2015-title40-vol22-part130.pdf>.
- EPA Total Maximum Daily Loads (TMDL) and Individual Water Quality-Based Effluent Limitations, 40 CFR § 130.7 (2015). Retrieved from <https://www.gpo.gov/fdsys/pkg/CFR-2015-title40-vol22/pdf/CFR-2015-title40-vol22-sec130-7.pdf>.
- Hall, S. (2002). *Failing systems* [PDF document]. Washington State Department of Health, Wastewater Management Program, Rule Development Committee, Issue Research Report. Retrieved from <http://www.doh.wa.gov/portals/1/Documents/Pubs/337-098.pdf>.
- Helsel, D.R. and Hirsch, R.M. (2002). Statistical methods in water resources. *Techniques of Water Resources Investigations, Book 4, Chapter A3*, U.S. Geological Survey. Available from <https://pubs.usgs.gov/publication/tm4A3>.
- Homer, C.G., Dewitz, J.A., Yang, L., Jin, S., Danielson, P., Xian, G., Megown, K. (2015). *Completion of the 2011 National Land Cover Database for the conterminous United States-Representing a decade of land cover change information*. *Photogrammetric Engineering and Remote Sensing*, 81 (5), 345-354

- Huston, C and Juarez-Colunga, E. (2009). *Guidelines for computing summary statistics for data-sets containing non-detects* [PDF document]. Department of Statistics and Actuarial Science, Simon Fraser University.
- Lee-Ing, Tong and Wang Chung-Ho (2002). *STATISTICA V5.5 and basic statistic analysis*. Taiwan: TasngHai.
- Metcalf & Eddy, Inc. (1991). *Wastewater Engineering: Treatment, Disposal, Reuse*: 3rd Edition. New York: McGraw-Hill.
- National Atmospheric Deposition Program (2016). NADP Maps and Data. <https://nadp.slh.wisc.edu/>.
- National Water Quality Monitoring Council (2016). Water Quality Portal of the USGS, EPA, and National Water Quality Monitoring Council. Available from www.waterqualitydata.us/portal/.
- NOAA (2016). NOAA National Climatic Data Center. Available from www.ncdc.noaa.gov/cdo-web/#t=secondTabLink
- ODAFF (2017). *Title 2, Chapter 1: Oklahoma Concentrated Animal Feeding Operations Act*. Retrieved from <https://ag.ok.gov/wp-content/uploads/2021/01/CAFOAct.pdf>.
- ODAFF (2021). Agricultural Environmental Management Services. Available from <https://ag.ok.gov/divisions/agricultural-environmental-management/>.
- ODAFF (2021). Title 35, Chapter 17 (Water Quality), Retrieved from <https://rules.ok.gov/code>.
- Oklahoma State Legislature (2021). Oklahoma Statutes: *Title 2, Chapter 1: Agricultural Code, Oklahoma Swine Feeding Operations Act*. Retrieved from www.oklegislature.gov/osstatuestitle.aspx.
- Oklahoma State Legislature (2021). Oklahoma Statutes: *Title 2, Chapter 1: Agricultural Code, Oklahoma Registered Poultry Feeding Operations Act*. Retrieved from <http://www.oklegislature.gov/osstatuestitle.aspx>.
- Office of Management and Budget (OMB) (2002). *Guidelines for ensuring and maximizing the quality, objectivity, utility, and integrity of information disseminated by Federal Agencies*, Section 515 of the Treasury and General Government Appropriations Act for Fiscal Year 2001 (Public Law 106-554; H.R. 5658). Retrieved from <https://www.eoc.gov/omb-guidelines-ensuring-and-maximizing-quality-objectivity-utility-and-integrity-information>.
- Oklahoma Climatological Survey (2021). Mesonet Long-Term Averages - Graphs. Available from https://www.mesonet.org/index.php/past_data/mesonet_averages_graphs#series%5B%5D=nrmn%3Atair_av%3Acurrent%3AN%3A0%3A%23000000%3AN%3A1&series%5B%5D=nrmn%3Atair_mx%3Aaverage%3AN%3A5%3A%23990000%3AN%3A1&series%5B%5D=nrmn%3Atair_av%3Aaverage%3AN%3A5%3A%23006600%3AN%3A1&series%5B%5D=nrmn%3Atair_mn%3Aaverage%3AN%3A5%3A%23000066%3AN%3A1.
- Oklahoma Conservation Commission (2015). *Statewide Rotating Basin Monitoring Program*. Available from <https://conservation.ok.gov/wq-statewide-rotating-basin-monitoring-program/>.
- Oklahoma Department of Commerce (2023). *Oklahoma State and county population projections through 2070*. Policy, Research, and Economic Analysis Division. Available from <https://www.okcommerce.gov/wp-content/uploads/Oklahoma-State-and-County-Population-Projections-Through-2070.pdf>.

- Oklahoma Department of Wildlife Conservation (ODWC) (2023). *Deer harvest totals*. Available from <https://www.wildlifedepartment.com/hunting/species/big-game-reports>.
- Oklahoma Mesonet (2024). *Short crop evapotranspiration*. Available from www.mesonet.org/index.php/agriculture/map/agriculture_essentials/evapotranspiration/short_crop_et_os_et_map
- Oklahoma Mesonet (2024). *Mesonet Meteorological Data*. Available from www.mesonet.org/
- Osborn, N.I. and Hardy, R. H. (1999). *Statewide groundwater vulnerability map of Oklahoma* (OWRB Technical Report No. 99-1). Retrieved from www.owrb.ok.gov/studies/reports/gwvulnerability/summary-intro.pdf.
- OWRB (2016). *OWRB water quality Data Viewer*. Available from <https://oklahoma.gov/owrb/data-and-maps/interactive-maps.html>
- OWRB (2016). *OWRB surface water data*. Available from <https://data-owrb.aquaticinformatics.net/Data>
- OWRB (2016). *OWRB water quality data standard operating procedures for streams and lakes*. Available from <https://oklahoma.gov/owrb/data-and-maps.html#data-and-maps-accordion>
- Pitt, R. and Maestre, A. (2015). The National Stormwater Quality Database, version 4.02. Available from <https://bmpdatabase.org/national-stormwater-quality-database>.
- PRISM Climate Group (2016). *Precipitation averages 1981-present*. Available from <http://prism.oregonstate.edu/>.
- Reed, K., Stowe, J.E. & Yanke, D. (2001). *Study to determine the magnitude of, and reasons for, chronically malfunctioning on-site sewage facility systems in Texas*, Report to the Texas On-Site Wastewater Treatment Research Council. Retrieved from www.tceq.texas.gov/assets/public/compliance/compliance_support/regulatory/ossf/StudyToDetermine.pdf.
- Schueler, T.R. (1999). Microbes and urban watersheds: Concentrations, sources, and pathways. *Watershed Protection Techniques*, 3 (1). Retrieved from https://owl.cwp.org/mdocs-posts/elc_pwp17/.
- Tukey, J.W. (1977). *Exploratory data analysis*. Reading, MA: Addison-Wesely
- USACE (2015). *U.S. Army Corps of Engineers Water Control Data System (Tulsa District)*. www.swt-wc.usace.army.mil/stations.htm.
- U.S. Bureau of Reclamation (2015). *Oklahoma Lakes and Reservoir*. Retrieved from https://www.usbr.gov/gp/lakes_reservoirs/oklahoma_lakes.html.
- U.S. Census Bureau; 2020. 2020 Census : Population by County in Oklahoma. <https://www.census.gov/library/stories/state-by-state/oklahoma-population-change-between-census-decade.html>
- USDA (U.S. Department of Agriculture)-NASS (National Agricultural Statistics Service) (2017). *Census of Agriculture*. Available from https://www.nass.usda.gov/Publications/AgCensus/2017/Full_Report/Census_by_State/Oklahoma/
- USDA-NASS (2015). CropScape – Cropland Data Layer. <http://nassgeodata.gmu.edu/CropScape/>

- USDA-NRCS (2009). Agricultural Waste Management Field Handbook, Part 651.
- USDA-NRCS; 2009. Comprehensive Nutrient Management Plans (NCMP). Available from <http://www.nrcs.usda.gov/wps/portal/nrcs/main/national/plantsanimals/livestock/afo/>
- USDA-NRCS (2016). Manure Management Planner (MMP). Available from <http://www.purdue.edu/agsoftware/mmp/>
- USDA-NRCS, National Cooperative Soil Survey (2015). *National Cooperative Soil Characterization Database*. Available from ncsslabdatamart.sc.egov.usda.gov/.
- USDA-NRCS (2016). Geospatial Data Gateway: <https://www.usgs.gov/tools/us-department-agriculture-usda-geospatial-data-gateway>.
- USDA-NRCS (2016). *Web Soil Survey*. Available from websoilsurvey.sc.egov.usda.gov/App/HomePage.htm.
- U.S. Department of Commerce, U.S. Census Bureau (1990). *1990 Census of population and housing* (U.S. Census item: Summary Tape File 3C, Product ID: C1-D90-S3CN-09-US1). Available from <https://www.census.gov/library/publications/1992/dec/ch-1.html>.
- U.S. Department of Commerce, U.S. Census Bureau (2010). Available from https://www.census.gov/data/tables/time-series/demo/popest/2010s-counties-total.html#par_textimage_242301767
- U.S. Department of Commerce, U.S. Census Bureau (2015). *Topologically Integrated Geographic Encoding and Referencing (TIGER) Products*. Available from https://tigerweb.geo.census.gov/tigerwebmain/TIGERweb_main.html.
- USGS, EPA, and Horizon Systems Corporation (2012). NHDPlus Version 2 [Software]. NHD PlusV2 consists of the National Hydrography Dataset, the USGS National Elevation Dataset and the Watershed Boundary Dataset. Available from http://www.horizon-systems.com/NHDPlus/NHDPlusV2_home.php. ArcGIS NHD available from <https://www.arcgis.com/home/item.html?id=1b06d6f3b4c347109d78b6b2a28f6433>.
- USGS (2016). National Land Cover Database. Available from https://www.usgs.gov/centers/eros/science/national-land-cover-database?qt-science_center_objects=0#qt-science_center_objects.
- USGS (2021). USGS Daily Streamflow Data. Retrieved from <http://waterdata.usgs.gov/ok/nwis/rt>.
- USGS (2016). *USGS National Water Information System; USGS Water Data for Oklahoma*. Available from waterdata.usgs.gov/ok/nwis/nwis.
- Woods, A.J., Omernik, J.M., Butler, D.R., Ford, J.G., Henley, J.E., Hoagland, B.W., . . . Moran, B.C. (2005). Ecoregions of Oklahoma (color poster with map, descriptive text, summary tables, and photographs): Reston, Virginia, U.S. Geological Survey (map scale 1:1,250,000). Downloads - including shapefiles, metadata, and PDF documents - are available from https://gaftp.epa.gov/EPADDataCommons/ORD/Ecoregions/ok/ok_eco_lg.pdf.

Appendix A Ambient Water Quality Data

Appendix Table A-1 Bacterial Data: 2000 to 2020

Waterbody Name	WQM Station	Date	EC ¹	ENT ^{1,2}
Poteau River	220100010010-001AT	08-25-2014	17.1	62.4
Poteau River	220100010010-001AT	07-14-2014	35	98.7
Poteau River	220100010010-001AT	06-30-2014	25.6	72.3
Poteau River	220100010010-001AT	06-17-2014	31.3	91.1
Poteau River	220100010010-001AT	05-05-2014	41.4	24.3
Poteau River	220100010010-001AT	08-05-2013	40.8	42.8
Poteau River	220100010010-001AT	07-08-2013	8.52	25.9
Poteau River	220100010010-001AT	06-24-2013	15.8	40.2
Poteau River	220100010010-001AT	06-11-2013	88	228.2
Poteau River	220100010010-001AT	05-22-2013	>2419.6	>2419.6
Poteau River	USGS 07247015	6/18/2014	120	12
Poteau River	USGS 07247015	6/9/2014	1900	>4800
Poteau River	USGS 07247015	8/28/2013	41	37
Poteau River	USGS 07247015	8/14/2013	860	4000
Poteau River	USGS 07247015	5/22/2013	6900	>4800
Poteau River	USGS 07247015	8/16/2012	52	260
Poteau River	USGS 07247015	6/13/2012	31	>4800
Poteau River	USGS 07247015	6/12/2012	10	>4800
Poteau River	USGS 07247015	8/16/2011	170	1500
Poteau River	USGS 07247015	6/7/2011	63	1300
Poteau River	USGS 07247015	5/23/2011	200	220
Poteau River	USGS 07247015	5/2/2011	9600	>4800
Poteau River	USGS 07247350	6/18/2014	74	10
Poteau River	USGS 07247350	6/9/2014	2300	>4800
Poteau River	USGS 07247350	5/9/2014	5000	>4800
Poteau River	USGS 07247350	8/28/2013	73	6
Poteau River	USGS 07247350	8/14/2013	660	2200
Poteau River	USGS 07247350	5/22/2013	2800	>4800
Poteau River	USGS 07247350	8/16/2012	10	76
Poteau River	USGS 07247350	6/27/2012	<10	4
Poteau River	USGS 07247350	6/13/2012	10	15
Poteau River	USGS 07247350	8/16/2011	41	24
Poteau River	USGS 07247350	6/7/2011	63	43
Poteau River	USGS 07247350	5/23/2011	97	80
Poteau River	USGS 07247350	5/2/2011	1900	>4800
Mill Creek	OK220600-01-0100J	9/10/2019	30	
Mill Creek	OK220600-01-0100J	8/20/2019	<1	
Mill Creek	OK220600-01-0100J	7/15/2019	<1	
Mill Creek	OK220600-01-0100J	6/3/2019	10	
Mill Creek	OK220600-01-0100J	8/28/2018	<1	
Mill Creek	OK220600-01-0100J	7/31/2018	120	

Waterbody Name	WQM Station	Date	EC ¹	ENT ^{1,2}
Mill Creek	OK220600-01-0100J	7/24/2018	<1	
Mill Creek	OK220600-01-0100J	6/19/2018	20	
Mill Creek	OK220600-01-0100J	6/6/2018	60	
Mill Creek	OK220600-01-0100J	8/25/2014	30	
Mill Creek	OK220600-01-0100J	7/21/2014	<10	
Mill Creek	OK220600-01-0100J	6/30/2014	10	
Mill Creek	OK220600-01-0100J	6/16/2014	<20	
Mill Creek	OK220600-01-0100J	5/12/2014	<5	
Brushy Creek	220600030010-001AT	08-11-2008	2909	2909
Brushy Creek	220600030010-001AT	07-21-2008	323	98
Brushy Creek	220600030010-001AT	06-30-2008	330	10
Brushy Creek	220600030010-001AT	06-09-2008	19863	14136
Brushy Creek	220600030010-001AT	05-19-2008	269	10
Brushy Creek	220600030010-001AT	09-20-2006	10	20
Brushy Creek	220600030010-001AT	09-18-2006	10	41
Brushy Creek	220600030010-001AT	07-25-2006	10	10
Brushy Creek	220600030010-001AT	07-12-2006	30	20
Brushy Creek	220600030010-001AT	06-20-2006	20	31
Brushy Creek	220600030010-001AT	06-07-2006	10	10
Beaver Creek	OK220600-04-0030G	9/25/2000	12996.5	23000
Beaver Creek	OK220600-04-0030G	8/21/2000	96	
Terrapin Creek	OK410210-02-0150G	9/6/2016	10	
Terrapin Creek	OK410210-02-0150G	8/1/2016	50	
Terrapin Creek	OK410210-02-0150G	6/28/2016	20	
Terrapin Creek	OK410210-02-0150G	6/20/2016	10	
Terrapin Creek	OK410210-02-0150G	5/23/2016	35	
Terrapin Creek	OK410210-02-0150G	9/22/2015	10	
Terrapin Creek	OK410210-02-0150G	8/18/2015	50	
Terrapin Creek	OK410210-02-0150G	7/14/2015	25	
Terrapin Creek	OK410210-02-0150G	6/16/2015	15	
Terrapin Creek	OK410210-02-0150G	6/9/2015	10	
Terrapin Creek	OK410210-02-0150G	5/7/2012	1200	
Terrapin Creek	OK410210-02-0150G	8/29/2011		40
Terrapin Creek	OK410210-02-0150G	7/26/2011		>1000
Terrapin Creek	OK410210-02-0150G	7/20/2011		<5
Terrapin Creek	OK410210-02-0150G	6/20/2011		1550
Terrapin Creek	OK410210-02-0150G	5/16/2011		<10
Terrapin Creek	OK410210-02-0150G	5/9/2011		40
Terrapin Creek	OK410210-02-0150G	9/20/2010		<10
Terrapin Creek	OK410210-02-0150G	8/16/2010		10
Terrapin Creek	OK410210-02-0150G	7/12/2010		<10
Terrapin Creek	OK410210-02-0150G	6/7/2010		10

Waterbody Name	WQM Station	Date	EC ¹	ENT ^{1,2}
Red River	410400010010-001AT	09-14-2015	6.1	47.4
Red River	410400010010-001AT	08-11-2015	6.2	66.3
Red River	410400010010-001AT	07-07-2015	23.8	214.3
Red River	410400010010-001AT	06-08-2015	18.7	>2419.6
Red River	410400010010-001AT	05-19-2015	150	547.5
Red River	410400010010-001AT	08-05-2013	3.1	42.2
Red River	410400010010-001AT	07-24-2013	1	98.95
Red River	410400010010-001AT	07-08-2013	<1	20.1
Red River	410400010010-001AT	06-04-2013	816.4	1553.1
Red River	410400010010-001AT	05-20-2013	378.4	770.1
Caney Creek	OK410400-02-0200G	6/16/2020	230	
Caney Creek	OK410400-02-0200G	6/2/2020	1020	
Caney Creek	OK410400-02-0200G	8/29/2016	230	
Caney Creek	OK410400-02-0200G	8/9/2016	30	
Caney Creek	OK410400-02-0200G	6/27/2016	360	
Caney Creek	OK410400-02-0200G	5/23/2016	2000	
Caney Creek	OK410400-02-0200G	9/21/2015	130	
Caney Creek	OK410400-02-0200G	8/17/2015	20	
Caney Creek	OK410400-02-0200G	8/3/2015	90	
Caney Creek	OK410400-02-0200G	6/8/2015	150	
Caney Creek	OK410400-02-0200G	9/14/2011		70
Caney Creek	OK410400-02-0200G	9/6/2011		538
Caney Creek	OK410400-02-0200G	8/1/2011		555
Caney Creek	OK410400-02-0200G	6/28/2011		245
Caney Creek	OK410400-02-0200G	5/16/2011		240
Caney Creek	OK410400-02-0200G	9/27/2010		600
Caney Creek	OK410400-02-0200G	8/23/2010		95
Caney Creek	OK410400-02-0200G	7/19/2010		10
Caney Creek	OK410400-02-0200G	6/14/2010		120
Caney Creek	OK410400-02-0200G	5/8/2007		>2000
North Boggy Creek	OK410400-08-0010E	9/13/2016	<10	
North Boggy Creek	OK410400-08-0010E	8/2/2016	100	
North Boggy Creek	OK410400-08-0010E	7/6/2016	660	
North Boggy Creek	OK410400-08-0010E	5/23/2016	310	
North Boggy Creek	OK410400-08-0010E	5/16/2016	280	
North Boggy Creek	OK410400-08-0010E	8/24/2015	1400	
North Boggy Creek	OK410400-08-0010E	8/17/2015	5	
North Boggy Creek	OK410400-08-0010E	7/20/2015	70	
North Boggy Creek	OK410400-08-0010E	6/15/2015	50	

¹ EC = *E. coli*; units = counts/100 mL..

² ENT = Enterococci; units = counts/100 mL.

Appendix Table A-2 Turbidity and Total Suspended Solids Data (2000-2021)

Waterbody Name	Waterbody ID	Date	Turbidity (NTU)	TSS (mg/L)	Flow Condition
Poteau River	OK220100010010_00	7/27/21	84		Above Normal
Poteau River	OK220100010010_00	10/14/20	18.3	18	Low
Poteau River	OK220100010010_00	8/5/20	68	25	Low
Poteau River	OK220100010010_00	7/29/20	66		Normal
Poteau River	OK220100010010_00	3/9/20	18	18	Normal
Poteau River	OK220100010010_00	1/13/20	81.3	50	Above Normal
Poteau River	OK220100010010_00	11/5/19	63.3	66	Above Normal
Poteau River	OK220100010010_00	10/2/19	39	40	Normal
Poteau River	OK220100010010_00	9/11/19	40		Normal
Poteau River	OK220100010010_00	8/27/19	139	84	Normal
Poteau River	OK220100010010_00	5/1/19	341.7	348	Above Normal
Poteau River	OK220100010010_00	3/13/19	59	56	Above Normal
Poteau River	OK220100010010_00	1/30/19	28	22	Above Normal
Poteau River	OK220100010010_00	11/7/18	84	72	Above Normal
Poteau River	OK220100010010_00	10/3/18	44.3	56.3	Above Normal
Poteau River	OK220100010010_00	7/9/18	60	43	Normal
Poteau River	OK220100010010_00	5/14/18	35.3	26	Normal
Poteau River	OK220100010010_00	2/7/18	42.3	50	Normal
Poteau River	OK220100010010_00	11/7/17	36	58	Normal
Poteau River	OK220100010010_00	10/4/17	18.3		Normal
Poteau River	OK220100010010_00	7/31/17	22.7	21	Normal
Poteau River	OK220100010010_00	3/8/17	51	52	Normal
Poteau River	OK220100010010_00	2/8/17	30	23	Low
Poteau River	OK220100010010_00	12/14/16	22.3	11	Low
Poteau River	OK220100010010_00	11/2/16	21	22.5	Low
Poteau River	OK220100010010_00	10/4/16	22.7	18	Low
Poteau River	OK220100010010_00	8/31/16	48.7	41.3	Low
Mill Creek	OK220600010100_20	9/8/2020	46.2	<10	Elevated
Mill Creek	OK220600010100_20	4/6/2020	45.9		High flow
Mill Creek	OK220600010100_20	2/26/2020	34.9	11	Elevated
Mill Creek	OK220600010100_20	1/14/2020	66.6	12	High flow
Mill Creek	OK220600010100_20	12/3/2019	71.6	<10	High flow
Mill Creek	OK220600010100_20	10/29/2019	73	16	High flow
Mill Creek	OK220600010100_20	9/10/2019	34.1	52	Low flow
Mill Creek	OK220600010100_20	8/20/2019	4.91	<10	Trace
Mill Creek	OK220600010100_20	7/15/2019	54.1	53	Slightly elevated
Mill Creek	OK220600010100_20	6/3/2019	44.4	<10	Elevated
Mill Creek	OK220600010100_20	4/29/2019	26.1	<10	Elevated

Waterbody Name	Waterbody ID	Date	Turbidity (NTU)	TSS (mg/L)	Flow Condition
Mill Creek	OK220600010100_20	3/26/2019	27.4	<10	Slightly elevated
Mill Creek	OK220600010100_20	2/20/2019	46.5	12	High flow
Mill Creek	OK220600010100_20	1/22/2019	87.3	<10	High flow
Mill Creek	OK220600010100_20	12/11/2018	19.5	<10	Slightly elevated
Mill Creek	OK220600010100_20	10/30/2018	31.6	<10	Elevated
Mill Creek	OK220600010100_20	10/2/2018	30.2	<10	Slightly elevated
Mill Creek	OK220600010100_20	8/28/2018	18.6	<10	Trace
Mill Creek	OK220600010100_20	7/31/2018	112		Slightly elevated
Mill Creek	OK220600010100_20	7/24/2018	12	<10	Trace
Mill Creek	OK220600010100_20	6/19/2018	13.1	<10	Base flow
Mill Creek	OK220600010100_20	6/6/2018	24.4		Base flow
Mill Creek	OK220600010100_20	3/30/2015	47.7	<10	High flow
Mill Creek	OK220600010100_20	2/24/2015	48.1	<10	Slightly elevated
Mill Creek	OK220600010100_20	1/20/2015	47.2	<10	Base flow
Mill Creek	OK220600010100_20	12/8/2014	44.6	17	Base flow
Mill Creek	OK220600010100_20	11/3/2014	27.9	<10	No flow
Mill Creek	OK220600010100_20	9/29/2014	13.5	<10	Trace
Mill Creek	OK220600010100_20	8/25/2014	14.8	<10	No flow
Mill Creek	OK220600010100_20	7/21/2014	29.1	<10	Slightly elevated
Mill Creek	OK220600010100_20	6/30/2014	55.4		Slightly elevated
Mill Creek	OK220600010100_20	6/16/2014	79.3	<10	Slightly elevated
Mill Creek	OK220600010100_20	5/12/2014	6.19	<10	No flow
Brushy Creek	OK220600030010_00	11-07-2000	220	200	Above Normal
Brushy Creek	OK220600030010_00	10-11-2000	31	28	Low
Brushy Creek	OK220600030010_00	09-13-2000	32	18	Low
Brushy Creek	OK220600030010_00	08-16-2000	16	16	Low
Brushy Creek	OK220600030010_00	07-18-2000	12	28	no rain
Brushy Creek	OK220600030010_00	06-14-2000	96	112	Interstitial
Brushy Creek	OK220600030010_00	05-15-2000	78	76	no rain
Brushy Creek	OK220600030010_00	02-22-2000		34	0.97" day of sampling
Brushy Creek	OK220600030010_00	01-25-2000	47	48	no rain
Brushy Creek	OK220600030010_00	12-08-1999	154	8	Interstitial
Brushy Creek	OK220600030010_00	11-09-1999	30	24	no rain
Brushy Creek	OK220600030010_00	10-12-1999	47	24	no rain
Brushy Creek	OK220600030010_00	09-21-1999		36	<1" of rain day before
Brushy Creek	OK220600030010_00	08-11-1999	15	12	Low
Brushy Creek	OK220600030010_00	07-13-1999	34	21	Low

Waterbody Name	Waterbody ID	Date	Turbidity (NTU)	TSS (mg/L)	Flow Condition
Brushy Creek	OK220600030010_00	06-15-1999	81	36	Low
Brushy Creek	OK220600030010_00	05-10-1999		35	>1" day of sampling
Brushy Creek	OK220600030010_00	04-13-1999	60	48	Low
Brushy Creek	OK220600030010_00	03-10-1999	114	78	Normal
Brushy Creek	OK220600030010_00	02-10-1999		40	<1" two day before
Brushy Creek	OK220600030010_00	01-12-1999	21	6	Low
Brushy Creek	OK220600030010_00	12-15-1998	59	38	Low
Brushy Creek	OK220600030010_00	11-10-1998	32	6	Low
Brushy Creek	OK220600030010_00	04-09-2012	33.8		Mix
Brushy Creek	OK220600030010_00	12-06-2011	90		Mix
Brushy Creek	OK220600030010_00	12-06-2011	67.8		<1" rain two days before
Brushy Creek	OK220600030010_00	10-04-2011	45		no rain
Brushy Creek	OK220600030010_00	08-02-2011	4.7		Interstitial
Brushy Creek	OK220600030010_00	06-07-2011	18		Interstitial
Brushy Creek	OK220600030010_00	04-04-2011	4		Interstitial
Brushy Creek	OK220600030010_00	02-22-2011	16.7		Interstitial
Brushy Creek	OK220600030010_00	12-06-2010	9		Interstitial
Brushy Creek	OK220600030010_00	10-12-2010	13		Interstitial
Brushy Creek	OK220600030010_00	06-01-2010	33		Low
Brushy Creek	OK220600030010_00	04-06-2010	41		Low
Brushy Creek	OK220600030010_00	02-16-2010	37.7		Interstitial
Brushy Creek	OK220600030010_00	12-08-2009	25.7		Interstitial
Brushy Creek	OK220600030010_00	10-07-2009	243.7		Flood
Brushy Creek	OK220600030010_00	08-05-2009	89.3		Interstitial
Brushy Creek	OK220600030010_00	06-10-2009	31		Interstitial
Brushy Creek	OK220600030010_00	04-15-2009	76.3		Low
Brushy Creek	OK220600030010_00	03-16-2009	15		Low
Brushy Creek	OK220600030010_00	02-04-2009	13		Interstitial
Brushy Creek	OK220600030010_00	12-08-2008	6		Interstitial
Brushy Creek	OK220600030010_00	12-08-2008	9		Low
Brushy Creek	OK220600030010_00	10-15-2008	8		Low
Brushy Creek	OK220600030010_00	08-06-2008	15		no rain
Brushy Creek	OK220600030010_00	05-20-2008	42		Interstitial
Brushy Creek	OK220600030010_00	04-01-2008	544		Flood
Brushy Creek	OK220600030010_00	02-26-2008	47		Low
Brushy Creek	OK220600030010_00	01-23-2008	22		Interstitial
Brushy Creek	OK220600030010_00	10-16-2007	51		Low
Brushy Creek	OK220600030010_00	09-11-2007	81		Low
Brushy Creek	OK220600030010_00	08-07-2007	27		Interstitial
Brushy Creek	OK220600030010_00	05-30-2007	75		Normal

Waterbody Name	Waterbody ID	Date	Turbidity (NTU)	TSS (mg/L)	Flow Condition
Brushy Creek	OK220600030010_00	05-01-2007	60		Above Normal
Brushy Creek	OK220600030010_10	11-07-2000	220	200	Above Normal
Brushy Creek	OK220600030010_10	10-11-2000	31	28	Low
Brushy Creek	OK220600030010_10	09-13-2000	32	18	Low
Brushy Creek	OK220600030010_10	08-16-2000	16	16	Low
Brushy Creek	OK220600030010_10	07-18-2000	12	28	no rain
Brushy Creek	OK220600030010_10	06-14-2000	96	112	Interstitial
Brushy Creek	OK220600030010_10	05-15-2000	78	76	no rain
Brushy Creek	OK220600030010_10	02-22-2000		34	0.97" day of sampling
Brushy Creek	OK220600030010_10	01-25-2000	47	48	no rain
Brushy Creek	OK220600030010_10	12-08-1999	154	8	Interstitial
Brushy Creek	OK220600030010_10	11-09-1999	30	24	no rain
Brushy Creek	OK220600030010_10	10-12-1999	47	24	no rain
Brushy Creek	OK220600030010_10	09-21-1999		36	<1" of rain day before
Brushy Creek	OK220600030010_10	08-11-1999	15	12	Low
Brushy Creek	OK220600030010_10	07-13-1999	34	21	Low
Brushy Creek	OK220600030010_10	06-15-1999	81	36	Low
Brushy Creek	OK220600030010_10	05-10-1999		35	>1" day of sampling
Brushy Creek	OK220600030010_10	04-13-1999	60	48	Low
Brushy Creek	OK220600030010_10	03-10-1999	114	78	Normal
Brushy Creek	OK220600030010_10	02-10-1999		40	<1" two day before
Brushy Creek	OK220600030010_10	01-12-1999	21	6	Low
Brushy Creek	OK220600030010_10	12-15-1998	59	38	Low
Brushy Creek	OK220600030010_10	11-10-1998	32	6	Low
Beaver Creek	OK220600040030_00	3/27/2001	14.8	52	Base flow
Beaver Creek	OK220600040030_00	2/21/2001	31	<1	Slightly elevated
Beaver Creek	OK220600040030_00	1/17/2001	59.7	2	Elevated
Beaver Creek	OK220600040030_00	12/6/2000	28.5	6	Slightly elevated
Beaver Creek	OK220600040030_00	10/31/2000	57	50	No flow
Beaver Creek	OK220600040030_00	9/25/2000	52.5	56	No flow
Beaver Creek	OK220600040030_00	8/21/2000	61.7	24	No flow
Beaver Creek	OK220600040030_00	7/17/2000	24.9	10	Low flow
Beaver Creek	OK220600040030_00	6/12/2000	40.2	33	Base flow
Beaver Creek	OK220600040030_00	5/8/2000	37.1	15	Elevated
Beaver Creek	OK220600040030_00	3/27/2000	48.8	48	Slightly elevated
Beaver Creek	OK220600040030_00	2/20/2000	37.3	30	Base flow
Beaver Creek	OK220600040030_00	1/18/2000	26.8	9.5	Slightly elevated
Terrapin Creek	OK410210020150_00	4/3/2017	23.2	<10	High flow

Waterbody Name	Waterbody ID	Date	Turbidity (NTU)	TSS (mg/L)	Flow Condition
Terrapin Creek	OK410210020150_00	2/27/2017	15.5	<10	High flow
Terrapin Creek	OK410210020150_00	1/23/2017	18.6	<10	Slightly elevated
Terrapin Creek	OK410210020150_00	12/12/2016	18.7	<10	Elevated
Terrapin Creek	OK410210020150_00	11/14/2016	2.07	<10	Trace
Terrapin Creek	OK410210020150_00	10/10/2016	4.04	<10	Base flow
Terrapin Creek	OK410210020150_00	9/6/2016	16	<10	Slightly elevated
Terrapin Creek	OK410210020150_00	8/1/2016	8.46	<10	Low flow
Terrapin Creek	OK410210020150_00	6/28/2016	3.34	<10	Base flow
Terrapin Creek	OK410210020150_00	5/23/2016	7.37	<10	Elevated
Terrapin Creek	OK410210020150_00	4/19/2016	18.7	<10	High flow
Terrapin Creek	OK410210020150_00	3/15/2016	11.2	<10	Elevated
Terrapin Creek	OK410210020150_00	2/9/2016	6.17	<10	Base flow
Terrapin Creek	OK410210020150_00	1/12/2016	8.17	<10	Slightly elevated
Terrapin Creek	OK410210020150_00	12/8/2015	8.49	<10	Elevated
Terrapin Creek	OK410210020150_00	11/3/2015	8.85	<10	No flow
Terrapin Creek	OK410210020150_00	9/22/2015	7.66	<10	No flow
Terrapin Creek	OK410210020150_00	8/18/2015	3.12	<10	No flow
Terrapin Creek	OK410210020150_00	7/14/2015	6.04	<10	Base flow
Terrapin Creek	OK410210020150_00	6/23/2015	12.7		Slightly elevated
Terrapin Creek	OK410210020150_00	6/16/2015	4.83		Base flow
Terrapin Creek	OK410210020150_00	6/9/2015	9.47	<10	Slightly elevated
Red River	OK410400010010_20	05-17-2021	44	78	Above Normal
Red River	OK410400010010_20	03-22-2021	30.3	40	Normal
Red River	OK410400010010_20	03-02-2021		200	<1" two days before
Red River	OK410400010010_20	10-05-2020	27.3	44	Normal
Red River	OK410400010010_20	08-04-2020	40		Normal
Red River	OK410400010010_20	01-27-2020	68.7	102	Above Normal
Red River	OK410400010010_20	12-10-2019	28.3	26	Normal
Red River	OK410400010010_20	10-01-2019	17.1	30	Normal
Red River	OK410400010010_20	07-30-2019	6		Normal
Red River	OK410400010010_20	07-23-2019	27.3	32	Low
Red River	OK410400010010_20	04-29-2019	74.3	108	Above Normal
Red River	OK410400010010_20	03-12-2019	153	128	Above Normal
Red River	OK410400010010_20	01-28-2019	45.7	75	Above Normal
Red River	OK410400010010_20	11-05-2018	80.7	94	Above Normal
Red River	OK410400010010_20	10-01-2018	47.3	106	Above Normal
Red River	OK410400010010_20	07-18-2018	42.7	40	Normal
Red River	OK410400010010_20	07-09-2018	37.3		Normal

Waterbody Name	Waterbody ID	Date	Turbidity (NTU)	TSS (mg/L)	Flow Condition
Red River	OK410400010010_20	05-15-2018	53	41	Normal
Red River	OK410400010010_20	02-06-2018	20.7	26	Normal
Red River	OK410400010010_20	11-06-2017	18.7	37	Normal
Red River	OK410400010010_20	10-02-2017	17.3	20	Normal
Red River	OK410400010010_20	07-24-2017	54.7		>1" day before and two days before
Red River	OK410400010010_20	03-06-2017	52.7	89	Normal
Red River	OK410400010010_20	02-06-2017	33.7	38	Normal
Red River	OK410400010010_20	12-12-2016	14.7	12	Low
Red River	OK410400010010_20	11-01-2016		22.5	no rain
Red River	OK410400010010_20	10-31-2016	20.3		Low
Red River	OK410400010010_20	10-03-2016	25.7	31	Normal
Red River	OK410400010010_20	08-29-2016	69.3	68	Low
Red River	OK410400010010_20	12-08-2015	93.7	140	Above Normal
Red River	OK410400010010_20	11-03-2015	304.3	220	Normal
Red River	OK410400010010_20	10-05-2015	33.3	34	Normal
Red River	OK410400010010_20	08-24-2015		162	no rain
Red River	OK410400010010_20	04-20-2015	108.3		Normal
Red River	OK410400010010_20	03-31-2015	100.3		Above Normal
Red River	OK410400010010_20	02-02-2015	34.7		Normal
Red River	OK410400010010_20	11-19-2014	15.3		no rain
Red River	OK410400010010_20	09-22-2014	20		<1" rain
Red River	OK410400010010_20	08-19-2014	43		no rain
Red River	OK410400010010_20	07-15-2014	38.3		no rain
Red River	OK410400010010_20	05-28-2014	35.7		<1" of rain
Caney Creek	OK410400020200_00	4/4/2017	24.1	<10	No flow
Caney Creek	OK410400020200_00	2/28/2017	27.9	<10	No flow
Caney Creek	OK410400020200_00	1/23/2017	36.8	<10	No flow
Caney Creek	OK410400020200_00	12/12/2016	15.3	<10	No flow
Caney Creek	OK410400020200_00	11/15/2016	30	<10	Elevated/no flow
Caney Creek	OK410400020200_00	10/11/2016	16	11	No flow
Caney Creek	OK410400020200_00	8/29/2016	57.9	37	No flow
Caney Creek	OK410400020200_00	8/9/2016	35.9	23	No flow
Caney Creek	OK410400020200_00	6/27/2016	71.5	49	No flow
Caney Creek	OK410400020200_00	5/23/2016	106	98	Elevated
Caney Creek	OK410400020200_00	4/18/2016	117	98	High flow
Caney Creek	OK410400020200_00	3/14/2016	34.6	17	High flow
Caney Creek	OK410400020200_00	2/8/2016	17.8	<10	Elevated
Caney Creek	OK410400020200_00	1/4/2016	21.6	<10	Elevated/no flow

Waterbody Name	Waterbody ID	Date	Turbidity (NTU)	TSS (mg/L)	Flow Condition
Caney Creek	OK410400020200_00	12/15/2015	46.6	18	High flow
Caney Creek	OK410400020200_00	10/26/2015	84.7	14	Elevated/no flow
Caney Creek	OK410400020200_00	9/21/2015	18.1	<10	No flow
Caney Creek	OK410400020200_00	8/20/2015	24.8		Trace
Caney Creek	OK410400020200_00	8/17/2015	34.9	22	No flow
Caney Creek	OK410400020200_00	6/8/2015	30.4	24	Elevated/no flow
North Boggy Creek	OK410400080010_00	4/10/2017	30.1	37	No flow
North Boggy Creek	OK410400080010_00	3/7/2017	60.2	<10	Trace
North Boggy Creek	OK410400080010_00	2/6/2017	12.5	<10	Trace
North Boggy Creek	OK410400080010_00	1/3/2017	18	<10	No flow
North Boggy Creek	OK410400080010_00	11/22/2016	19.6	<10	No flow
North Boggy Creek	OK410400080010_00	10/18/2016	31.2	<10	No flow
North Boggy Creek	OK410400080010_00	9/13/2016	16.4	<10	No flow
North Boggy Creek	OK410400080010_00	8/2/2016	94.6	<10	Trace
North Boggy Creek	OK410400080010_00	7/13/2016	58.3		Base flow
North Boggy Creek	OK410400080010_00	7/6/2016	106	11	Slightly elevated
North Boggy Creek	OK410400080010_00	5/23/2016	41.2	22	Slightly elevated
North Boggy Creek	OK410400080010_00	4/25/2016	61	<10	Elevated/no flow
North Boggy Creek	OK410400080010_00	3/21/2016	60.1	<10	Elevated/no flow
North Boggy Creek	OK410400080010_00	2/24/2016	169	120	Elevated
North Boggy Creek	OK410400080010_00	1/11/2016	44.9	<10	Elevated
North Boggy Creek	OK410400080010_00	12/7/2015	38	<10	Elevated/no flow
North Boggy Creek	OK410400080010_00	11/2/2015	119	20	Elevated
North Boggy Creek	OK410400080010_00	10/5/2015	56.4	<10	Elevated/no flow
North Boggy Creek	OK410400080010_00	8/24/2015	353	38	Elevated/no flow
North Boggy Creek	OK410400080010_00	7/20/2015	38.1	<10	Elevated/no flow
North Boggy Creek	OK410400080010_00	6/15/2015	18.9	3700	Elevated/no flow
Cloudy Creek	OK410210020300_00	6/29/2005	3.86	<10	
Cloudy Creek	OK410210020300_00	7/13/2005	4.16		
Cloudy Creek	OK410210020300_00	8/2/2005	5.66	<10	
Cloudy Creek	OK410210020300_00	9/7/2005	14.1	11	
Cloudy Creek	OK410210020300_00	10/11/2005	9.64	<10	
Cloudy Creek	OK410210020300_00	11/15/2005	1.98	<10	
Cloudy Creek	OK410210020300_00	12/21/2005	2.48	<10	
Cloudy Creek	OK410210020300_00	1/31/2006	30.2	27	
Cloudy Creek	OK410210020300_00	3/7/2006	6.12	<10	

Waterbody Name	Waterbody ID	Date	Turbidity (NTU)	TSS (mg/L)	Flow Condition
Cloudy Creek	OK410210020300_00	4/11/2006	4.2	<10	
Cloudy Creek	OK410210020300_00	5/16/2006	10.8	<10	
Cloudy Creek	OK410210020300_00	6/20/2006	3.49	<10	
Cloudy Creek	OK410210020300_00	7/17/2006	16.6	<10	
Cloudy Creek	OK410210020300_00	8/21/2006	64.8	53	
Cloudy Creek	OK410210020300_00	9/25/2006	716	<10	
Cloudy Creek	OK410210020300_00	10/30/2006	9.69	<10	
Cloudy Creek	OK410210020300_00	12/12/2006	7.51	<10	
Cloudy Creek	OK410210020300_00	1/22/2007	11.3	<10	High Flow
Cloudy Creek	OK410210020300_00	2/12/2007	6.63	<10	
Cloudy Creek	OK410210020300_00	3/19/2007	2.98	<10	
Cloudy Creek	OK410210020300_00	4/16/2007	8.88	<10	
Goose Creek	OK410400030490_00	4/4/2006	14.5	<10	
Goose Creek	OK410400030490_00	4/16/2007	14.5	<10	
Goose Creek	OK410400030490_00	6/21/2005	62.1	38	
Goose Creek	OK410400030490_00	7/25/2005	34.4	42	
Goose Creek	OK410400030490_00	8/29/2005	16	<10	
Goose Creek	OK410400030490_00	10/3/2005	7.99	<10	
Goose Creek	OK410400030490_00	11/7/2005	4.99	<10	
Goose Creek	OK410400030490_00	12/12/2005	12.4	<10	
Goose Creek	OK410400030490_00	1/24/2006	12.9	<10	
Goose Creek	OK410400030490_00	2/28/2006	8.52	<10	
Goose Creek	OK410400030490_00	6/13/2006	12.7	<10	
Goose Creek	OK410400030490_00	7/17/2006	13	15	
Goose Creek	OK410400030490_00	10/30/2006	3.17	<10	
Goose Creek	OK410400030490_00	12/4/2006	12.5	<10	
Goose Creek	OK410400030490_00	1/9/2007	11.4	<10	
Goose Creek	OK410400030490_00	2/13/2007	365	83	
Goose Creek	OK410400030490_00	3/19/2007	6.26	<10	

Appendix B OPDES Discharge Monitoring Report Data

Appendix Table B-1 OPDES Discharge Monitoring Report Data

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0040169	001	01/31/2014	1.12	1.71	Not Available	25.0
OK0040169	001	02/28/2014	1.11	1.67	Not Available	25.0
OK0040169	001	03/31/2014	1.06	1.70	Not Available	24.5
OK0040169	001	04/30/2014	1.37	2.46	Not Available	23.0
OK0040169	001	05/31/2014	1.14	1.98	Not Available	25.5
OK0040169	001	06/30/2014	1.06	2.12	Not Available	31.5
OK0040169	001	07/31/2014	0.92	1.92	Not Available	5.5
OK0040169	001	08/31/2014	1.05	2.04	Not Available	28.5
OK0040169	001	09/30/2014	1.20	1.97	Not Available	32.0
OK0040169	001	10/31/2014	1.48	2.14	Not Available	23.5
OK0040169	001	11/30/2014	1.11	1.67	Not Available	37.0
OK0040169	001	12/31/2014	1.22	1.73	Not Available	17.0
OK0040169	001	01/31/2015	1.10	1.52	Not Available	24.0
OK0040169	001	02/28/2015	1.12	1.70	Not Available	26.5
OK0040169	001	03/31/2015	0.65	1.27	Not Available	15.5
OK0040169	001	04/30/2015	0.86	1.40	Not Available	22.5
OK0040169	001	05/31/2015	0.38	1.66	Not Available	< .03
OK0040169	001	06/30/2015	0.95	1.63	Not Available	20.5
OK0040169	001	07/31/2015	1.09	1.64	Not Available	7.0
OK0040169	001	08/31/2015	1.12	1.90	Not Available	14.0
OK0040169	001	09/30/2015	1.45	2.24	Not Available	4.0
OK0040169	001	10/31/2015	1.14	2.08	Not Available	18.5
OK0040169	001	11/30/2015	1.47	2.27	Not Available	7.5
OK0040169	001	12/31/2015	1.26	1.89	Not Available	9.0
OK0040169	001	01/31/2016	1.18	1.91	Not Available	16.0
OK0040169	001	02/29/2016	1.01	2.10	Not Available	12.5
OK0040169	001	03/31/2016	1.12	1.80	Not Available	3.5
OK0040169	001	04/30/2016	1.17	1.70	Not Available	27.0
OK0040169	001	05/31/2016	0.91	1.83	Not Available	4.0
OK0040169	001	06/30/2016	1.10	1.98	Not Available	30.0
OK0040169	001	07/31/2016	1.11	2.22	Not Available	172.0
OK0040169	001	08/31/2016	1.27	2.25	Not Available	15.5
OK0040169	001	09/30/2016	1.07	1.94	Not Available	9.5
OK0040169	001	10/31/2016	0.93	1.78	Not Available	28.0
OK0040169	001	11/30/2016	1.01	1.70	Not Available	7.0
OK0040169	001	12/31/2016	1.08	1.53	Not Available	19.5
OK0040169	001	01/31/2017	1.15	1.15	Not Available	7.5
OK0040169	001	02/28/2017	1.07	1.37	Not Available	10.0
OK0040169	001	03/31/2017	0.91	2.05	Not Available	12.0
OK0040169	001	04/30/2017	0.83	1.46	Not Available	18.0

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0040169	001	05/31/2017	0.94	1.69	Not Available	19.5
OK0040169	001	06/30/2017	1.04	2.37	Not Available	6.5
OK0040169	001	07/31/2017	1.25	1.86	Not Available	18.5
OK0040169	001	08/31/2017	1.37	2.93	Not Available	29.5
OK0040169	001	09/30/2017	1.09	1.92	Not Available	32.5
OK0040169	001	10/31/2017	1.28	2.62	3.00	3.0
OK0040169	001	11/30/2017	1.20	1.93	10.75	13.5
OK0040169	001	12/31/2017	1.17	1.82	13.50	13.5
OK0040169	001	01/31/2018	1.08	1.75	14.75	16.0
OK0040169	001	02/28/2018	1.23	2.30	9.95	13.0
OK0040169	001	03/31/2018	0.96	1.88	16.70	26.5
OK0040169	001	04/30/2018	1.21	2.14	22.25	37.5
OK0040169	001	05/31/2018	0.92	1.93	7.20	7.5
OK0040169	001	06/30/2018	1.30	2.50	17.20	27.5
OK0040169	001	07/31/2018	1.19	2.51	12.60	15.5
OK0040169	001	08/31/2018	1.13	1.87	6.95	7.0
OK0040169	001	09/30/2018	1.07	2.84	13.00	13.5
OK0040169	001	10/31/2018	1.27	2.67	12.75	13.5
OK0040169	001	11/30/2018	1.09	2.39	14.00	18.5
OK0040169	001	12/31/2018	0.98	2.37	16.25	18.0
OK0040169	001	01/31/2019	1.01	1.66	9.45	12.0
OK0040169	001	02/28/2019	1.02	1.02	6.90	6.9
OK0040169	001	03/31/2019	1.28	1.28	17.50	17.5
OK0040169	001	04/30/2019	1.65	1.65	9.50	9.5
OK0040169	001	05/31/2019	0.78	1.47	12.25	15.0
OK0040169	001	06/30/2019	1.24	1.94	7.25	8.0
OK0040169	001	07/31/2019	0.98	1.21	4.00	6.0
OK0040169	001	08/31/2019	1.16	1.73	16.50	20.0
OK0040169	001	09/30/2019	1.20	1.79	10.00	13.0
OK0040169	001	10/31/2019	1.13	1.98	7.00	9.0
OK0040169	001	11/30/2019	1.12	1.67	12.00	14.0
OK0040169	001	12/31/2019	1.04	1.52	6.00	7.0
OK0040169	001	01/31/2020	0.96	1.20	7.00	17.0
OK0040169	001	02/29/2020	0.95	1.30	12.00	16.0
OK0040169	001	03/31/2020	1.19	1.44	10.50	13.0
OK0040169	001	04/30/2020	1.21	2.05	16.00	18.0
OK0040169	001	05/31/2020	0.81	1.43	23.00	41.0
OK0040169	001	06/30/2020	0.89	1.59	10.00	12.0
OK0040169	001	07/31/2020	0.79	1.43	29.00	40.0
OK0040169	001	08/31/2020	0.78	1.20	18.50	22.0
OK0040169	001	09/30/2020	0.61	1.40	17.50	19.0
OK0040169	001	10/31/2020	0.48	0.81	8.50	9.0

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0040169	001	11/30/2020	0.35	0.77	9.50	16.0
OK0040169	001	12/31/2020	0.47	0.96	9.50	12.0
OK0040169	001	01/31/2021	0.32	0.77	3.00	3.0
OK0040169	001	02/28/2021	0.76	3.26	11.50	12.0
OK0040169	001	03/31/2021	0.45	1.18	10.50	20.0
OK0040169	001	04/30/2021	0.49	1.17	19.50	27.0
OK0040169	001	05/31/2021	0.65	1.48	16.00	19.0
OK0040169	001	06/30/2021	0.61	0.98	18.50	24.0
OK0040169	001	07/31/2021	0.65	1.06	19.50	30.0
OK0040169	001	08/31/2021	0.68	1.19	4.00	7.0
OK0040169	001	09/30/2021	0.55	1.22	8.50	13.0
OK0040169	001	10/31/2021	0.56	0.88	8.50	12.0
OK0040169	001	11/30/2021	0.65	1.22	22.50	29.0
OK0040169	001	12/31/2021	0.56	0.79	6.50	9.0
OK0042781	001	01/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	03/31/2014	.043	.043	14	14
OK0042781	001	04/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	10/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	12/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	01/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	03/31/2015	.0864	.0864	11	11
OK0042781	001	04/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	05/31/2015	.0576	.0576	16	16
OK0042781	001	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	12/31/2015	.017	.019	4.5	8
OK0042781	001	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	02/29/2016	.049	.058	1	1
OK0042781	001	03/31/2016	.065	.065	1	1
OK0042781	001	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	001	05/31/2016	.0432	.0432	13	13
OK0042781	001	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	02/28/2018	.0048	.006	5	5
OK0042781	001	03/31/2018	.0007	.0014	13	13
OK0042781	001	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	08/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	01/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	04/30/2019	.0192	.0192	21	21
OK0042781	001	05/31/2019	.003	.0053	13.5	26
OK0042781	001	06/30/2019	.018	.018	2	2
OK0042781	001	07/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	10/31/2019	.0024	.0024	2	2

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	001	11/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	12/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	01/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	02/29/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	03/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	04/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	05/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	09/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	11/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	12/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	01/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	02/28/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	04/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	05/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	06/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	08/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	001	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	01/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	03/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	04/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	10/31/2014	.058	.058	25	25
OK0042781	003	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	12/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	01/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	03/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	04/30/2015	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	003	05/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	12/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	03/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	04/30/2016	.043	.043	5	5
OK0042781	003	05/31/2016	.0144	.0144	24	24
OK0042781	003	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	02/28/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	03/31/2018	.0006	.0012	20	20
OK0042781	003	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	08/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	003	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	01/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	04/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	05/31/2019	.0029	.0029	25	25
OK0042781	003	06/30/2019	.0036	.0036	11	11
OK0042781	003	07/31/2019	.0028	.0028	12	12
OK0042781	003	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	10/31/2019	.003	.003	5	5
OK0042781	003	11/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	12/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	01/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	02/29/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	03/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	04/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	05/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	09/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	11/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	12/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	01/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	02/28/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	04/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	05/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	06/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	08/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	003	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	01/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	03/31/2014	.043	.043	< 45	45
OK0042781	004	04/30/2014	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	004	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	10/31/2014	.058	.058	63	63
OK0042781	004	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	12/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	01/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	03/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	04/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	05/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	12/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	03/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	05/31/2016	.0144	.0144	36	36
OK0042781	004	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	004	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	02/28/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	03/31/2018	.0012	.0024	20	20
OK0042781	004	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	08/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	01/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	04/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	05/31/2019	.006	.006	45	45
OK0042781	004	06/30/2019	.0002	.0002	11	11
OK0042781	004	07/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	10/31/2019	.0006	.0006	40	40
OK0042781	004	11/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	12/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	01/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	02/29/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	03/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	04/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	05/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	09/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	11/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	12/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	01/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	02/28/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	04/30/2021	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	004	05/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	06/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	08/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	004	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	01/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	03/31/2014	.115	.115	22	44
OK0042781	006	04/30/2014	.11	.11	10	10
OK0042781	006	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	10/31/2014	.058	.058	4	4
OK0042781	006	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	12/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	01/31/2015	.1152	.1152	59	59
OK0042781	006	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	03/31/2015	.1224	.1296	13.7	21
OK0042781	006	04/30/2015	.0144	.031	1	1
OK0042781	006	05/31/2015	.083	.083	32	32
OK0042781	006	06/30/2015	.1224	.1224	16	16
OK0042781	006	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	10/31/2015	.0216	.0216	29	29
OK0042781	006	11/30/2015	.0288	.0336	20	20
OK0042781	006	12/31/2015	.032	.043	11.5	14
OK0042781	006	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	02/29/2016	.1152	.1152	13	13
OK0042781	006	03/31/2016	.137	.137	16	16
OK0042781	006	04/30/2016	.05	.05	5	5
OK0042781	006	05/31/2016	.0648	.0648	49	49
OK0042781	006	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	006	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	04/30/2017	.0267	.0267	18	18
OK0042781	006	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	02/28/2018	.0096	.0108	25	25
OK0042781	006	03/31/2018	.0072	.0144	19	19
OK0042781	006	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	05/31/2018	.0024	.0024	23	23
OK0042781	006	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	08/31/2018	2.0266	2.0266	15	15
OK0042781	006	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	01/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	04/30/2019	.024	.024	28	29
OK0042781	006	05/31/2019	.0066	.0084	17	28
OK0042781	006	06/30/2019	.018	.018	12	12
OK0042781	006	07/31/2019	.0135	.0135	18	18
OK0042781	006	08/31/2019	.0135	.0135	6	6
OK0042781	006	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	10/31/2019	.0072	.0072	23	40
OK0042781	006	11/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	12/31/2019	.0135	.0135	19	19
OK0042781	006	01/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	02/29/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	03/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	04/30/2020	.0012	.0012	8	8

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	006	05/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	06/30/2020	.0036	.0036	22	22
OK0042781	006	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	09/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	11/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	12/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	01/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	02/28/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	04/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	05/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	06/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	08/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	006	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	01/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	03/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	04/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	10/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	12/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	01/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	03/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	04/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	05/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	008	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	12/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	03/31/2016	.051	.051	20	20
OK0042781	008	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	05/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	02/28/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	03/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	08/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	01/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	04/30/2019	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0042781	008	05/31/2019	.0012	.0012	40	40
OK0042781	008	06/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	07/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	10/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	11/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	12/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	01/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	02/29/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	03/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	04/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	05/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	09/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	11/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	12/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	01/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	02/28/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	04/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	05/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	06/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	08/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OK0042781	008	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	1/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	03/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	04/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	10/31/2014	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG950045	001	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	12/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	01/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	03/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	04/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	05/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	12/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	03/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	05/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	05/31/2017	.378	.378	35	35
OKG950045	001	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	02/28/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	03/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG950045	001	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	08/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG950045	001	09/30/2018	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	10/31/2018	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	11/30/2018	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	12/31/2018	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	01/31/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	02/28/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	03/31/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	04/30/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	05/31/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	06/30/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	07/31/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	08/31/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	09/30/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	10/31/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	11/30/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	12/31/2019	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	01/31/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	02/29/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	03/31/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	04/30/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	05/31/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	06/30/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	07/31/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	08/31/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	09/30/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	10/31/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	11/30/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	12/31/2020	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	01/31/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	02/28/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	03/31/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	04/30/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	05/31/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	06/30/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	07/31/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	08/31/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	09/30/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	10/31/2021	NODI: C	NODI: C	Not Available	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG950045	001	11/30/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG950045	001	12/31/2021	NODI: C	NODI: C	Not Available	NODI: C
OKG040025	001	01/31/2014	5	6.5	6.3	9
OKG040025	001	02/28/2014	2.26	3.88	5.5	9
OKG040025	001	03/31/2014	3.23	6.46	5.25	9
OKG040025	001	04/30/2014	4.7	5.8	4.3	6
OKG040025	001	05/31/2014	4.5	12.9	5.5	14
OKG040025	001	06/30/2014	5.4	7.7	1.25	2
OKG040025	001	07/31/2014	1.3	2.7	2.25	3
OKG040025	001	08/31/2014	0.81	1.3	4	11
OKG040025	001	09/30/2014	0.8	1.3	1	1
OKG040025	001	10/31/2014	1.5	1.5	2	3
OKG040025	001	11/30/2014	0.6	0.6	3.75	9
OKG040025	001	12/31/2014	2.1	5.2	15.3	35
OKG040025	001	01/31/2015	1.3	2.6	5.3	7
OKG040025	001	02/28/2015	0.6	0.6	1	4
OKG040025	001	03/31/2015	2.3	2.6	5.75	16
OKG040025	001	04/30/2015	1.5	2.2	9.5	18
OKG040025	001	05/31/2015	2.3	3.2	8.3	17
OKG040025	001	06/30/2015	1.6	1.9	< 5	11
OKG040025	001	07/31/2015	< .5	0.5	1	3
OKG040025	001	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	09/30/2015	< .6	0.6	< 1	< 1
OKG040025	001	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	11/30/2015	< 2.7	2.7	< 2	2
OKG040025	001	12/31/2015	2	3.2	3.4	7
OKG040025	001	02/29/2016	< 1.08	1.61	< 2.7	6
OKG040025	001	03/31/2016	< 2.96	8.07	< 4.3	12
OKG040025	001	04/30/2016	0.6	0.6	< 2	3
OKG040025	001	05/31/2016	< 1.5	1.94	10	14
OKG040025	001	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	03/31/2017	1.62	2.59	7.5	13
OKG040025	001	04/30/2017	1.1	2.15	4.67	8
OKG040025	001	05/31/2017	0.538	0.538	4	7

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040025	001	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	07/31/2017	0.538	0.538	1	1
OKG040025	001	08/31/2017	1.48	1.93	1.66	2
OKG040025	001	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	10/31/2017	0.646	0.646	1	1
OKG040025	001	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	12/31/2017	0.646	0.646	1	1
OKG040025	001	01/31/2018	4.31	4.31	14	14
OKG040025	001	02/28/2018	5.92	10.8	11	18
OKG040025	001	03/31/2018	1.5	3.23	1.33	2
OKG040025	001	04/30/2018	0.84	0.84	3.6	5
OKG040025	001	05/31/2018	0.646	0.646	8	8
OKG040025	001	06/30/2018	0.646	0.646	1.5	3
OKG040025	001	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	001	08/31/2018	1.5	4.3	4	11
OKG040025	001	09/30/2018	1.1	1.1	2	2
OKG040025	001	10/31/2018	0.646	0.646	4	4
OKG040025	001	11/30/2018	1.62	2.59	2	3
OKG040025	001	12/31/2018	1.49	1.94	2.67	6
OKG040025	001	01/31/2019	2.6	2.6	5.5	6
OKG040025	002	01/31/2014	0.6	0.6	19	24
OKG040025	002	02/28/2014	0.64	0.64	10.5	15
OKG040025	002	03/31/2014	1.62	1.94	20.8	53
OKG040025	002	04/30/2014	0.64	0.64	27	34
OKG040025	002	05/31/2014	0.97	1.3	6.5	7
OKG040025	002	06/30/2014	0.6	0.6	6	6
OKG040025	002	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	08/31/2014	1.1	1.1	21	21
OKG040025	002	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	10/31/2014	1.3	1.3	19	19
OKG040025	002	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	12/31/2014	0.64	0.64	12.3	49
OKG040025	002	01/31/2015	< 1.3	1.3	< 13	13
OKG040025	002	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	03/31/2015	1.03	1.3	22	25
OKG040025	002	04/30/2015	0.9	1.07	5	13
OKG040025	002	05/31/2015	0.8	1.3	7	11
OKG040025	002	06/30/2015	< .6	0.6	< 5	5
OKG040025	002	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040025	002	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	12/31/2015	< .6	0.6	5	9
OKG040025	002	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	03/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	05/31/2016	< .6	0.6	< 8	8
OKG040025	002	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	08/31/2017	0.646	0.646	7	7
OKG040025	002	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	01/31/2018	0.54	0.54	28	28
OKG040025	002	02/28/2018	1.1	1.61	20	21
OKG040025	002	03/31/2018	0.646	0.646	21	21
OKG040025	002	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	08/31/2018	1.1	1.1	5	5
OKG040025	002	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	10/31/2018	0.646	0.646	7	7
OKG040025	002	11/30/2018	0.646	0.646	1	1
OKG040025	002	12/31/2018	0.646	0.646	2	3
OKG040025	002	01/31/2019	0.646	0.646	10	10
OKG040025	002	02/28/2019	0.646	0.646	8	8
OKG040025	002	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	04/30/2019	0.646	0.646	6	6
OKG040025	002	05/31/2019	0.646	0.646	8	8

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040025	002	06/30/2019	0.646	0.646	9	9
OKG040025	002	07/31/2019	0.646	0.646	5	5
OKG040025	002	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	10/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	11/30/2019	0.646	0.646	7.5	12
OKG040025	002	12/31/2019	0.646	0.646	5.5	7
OKG040025	002	01/31/2020	0.646	0.646	19	24
OKG040025	002	02/29/2020	0.646	0.646	45.7	72
OKG040025	002	03/31/2020	0.646	0.646	16	17
OKG040025	002	04/30/2020	0.646	0.646	13.3	27
OKG040025	002	05/31/2020	0.646	0.646	9	15
OKG040025	002	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	09/30/2020	1.1	2	7.33	11
OKG040025	002	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	11/30/2020	0.129	0.129	16	16
OKG040025	002	12/31/2020	0.19	0.32	10	14
OKG040025	002	01/31/2021	0.27	0.45	12.8	17
OKG040025	002	02/28/2021	0.112	0.258	73	171
OKG040025	002	03/31/2021	0.129	0.194	21.5	32
OKG040025	002	04/30/2021	0.14	0.19	6.75	11
OKG040025	002	05/31/2021	0.45	0.52	19.5	21
OKG040025	002	06/30/2021	0.15	0.2	3.67	7
OKG040025	002	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	08/31/2021	0.1	0.1	23	23
OKG040025	002	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	002	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	01/31/2014	2.6	3.2	2.5	5
OKG040025	004	02/28/2014	1.61	1.94	2	4
OKG040025	004	03/31/2014	3.23	6.46	5.25	17
OKG040025	004	04/30/2014	4.7	6.5	4.5	6
OKG040025	004	05/31/2014	3.7	9.7	2.75	6
OKG040025	004	06/30/2014	3.1	9.3	4.25	6
OKG040025	004	07/31/2014	0.8	2.7	38	76
OKG040025	004	08/31/2014	2.7	8.1	10	13.5
OKG040025	004	09/30/2014	0.5	0.6	16	28
OKG040025	004	10/31/2014	1.6	2.6	3.5	9
OKG040025	004	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040025	004	12/31/2014	1.9	2.6	3.6	8
OKG040025	004	01/31/2015	1.7	3.2	3.3	8
OKG040025	004	02/28/2015	0.6	0.6	1	3
OKG040025	004	03/31/2015	1.8	3.2	2.5	7
OKG040025	004	04/30/2015	1.3	2.2	5.3	9
OKG040025	004	05/31/2015	1.8	2.6	7	10
OKG040025	004	06/30/2015	1	1.3	< 5	9
OKG040025	004	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	11/30/2015	< 2.1	2.1	< 14	14
OKG040025	004	12/31/2015	1.9	2.6	2	3
OKG040025	004	02/29/2016	< .81	1.08	< 1	< 1
OKG040025	004	03/31/2016	< 2.15	5.38	2.5	5
OKG040025	004	04/30/2016	< .6	0.6	< 2.5	2
OKG040025	004	05/31/2016	< .97	1.29	5.5	7
OKG040025	004	06/30/2016	< .6	0.6	< 1.5	3
OKG040025	004	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	03/31/2017	0.65	0.65	3	5
OKG040025	004	04/30/2017	0.67	1.1	2.67	5
OKG040025	004	05/31/2017	0.538	0.538	5.5	6
OKG040025	004	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	08/31/2017	0.646	0.646	6.3	16
OKG040025	004	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	01/31/2018	2.15	2.15	2	2
OKG040025	004	02/28/2018	4.31	8.07	5	8
OKG040025	004	03/31/2018	1.29	2.58	2.33	5
OKG040025	004	04/30/2018	0.646	0.646	2.67	5
OKG040025	004	05/31/2018	0.646	0.646	2	2
OKG040025	004	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040025	004	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	08/31/2018	2.42	4.3	6	10
OKG040025	004	09/30/2018	0.54	0.54	1	1
OKG040025	004	10/31/2018	0.646	0.646	9	9
OKG040025	004	11/30/2018	1.94	3.23	3	3
OKG040025	004	12/31/2018	1.49	1.94	3.67	7
OKG040025	004	01/31/2019	1.6	1.94	2	3
OKG040025	004	02/28/2019	1.08	1.9	1.33	2
OKG040025	004	03/31/2019	0.81	1.29	2.5	5
OKG040025	004	04/30/2019	0.86	1.29	3.7	6
OKG040025	004	05/31/2019	1.08	1.3	5	9
OKG040025	004	06/30/2019	0.835	1.29	6.33	10
OKG040025	004	07/31/2019	0.646	0.646	7	8
OKG040025	004	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	10/31/2019	0.646	0.646	11	11
OKG040025	004	11/30/2019	0.646	0.646	4.3	10
OKG040025	004	12/31/2019	0.646	0.646	3.5	6
OKG040025	004	01/31/2020	0.646	0.646	3	5
OKG040025	004	02/29/2020	2	2.8	5.7	10
OKG040025	004	03/31/2020	1.7	3.9	1	1
OKG040025	004	04/30/2020	0.646	0.646	3.25	7
OKG040025	004	05/31/2020	0.86	1.3	4.67	6
OKG040025	004	06/30/2020	0.646	0.646	1	1
OKG040025	004	07/31/2020	0.646	0.646	1	1
OKG040025	004	08/31/2020	0.87	1.1	10	19
OKG040025	004	09/30/2020	1.68	2.6	6.66	11
OKG040025	004	10/31/2020	0.064	0.064	1	1
OKG040025	004	11/30/2020	0.09	0.129	1	1
OKG040025	004	12/31/2020	1.51	1.94	4.3	6
OKG040025	004	01/31/2021	1.18	2.59	1.5	3
OKG040025	004	02/28/2021	0.9546	2.58	3.33	6
OKG040025	004	03/31/2021	0.452	0.646	1	1
OKG040025	004	04/30/2021	0.646	1.29	4.75	10
OKG040025	004	05/31/2021	1.94	1.94	9	12
OKG040025	004	06/30/2021	0.71	1.6	5	11
OKG040025	004	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	08/31/2021	0.082	0.11	2.5	4
OKG040025	004	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	10/31/2021	0.0646	0.0646	1	1
OKG040025	004	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	004	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040025	005	01/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	03/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	04/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	10/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	12/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	01/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	03/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	04/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	05/31/2015	1.3	1.3	< 15	15
OKG040025	005	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	12/31/2015	< .6	.6	< 28	28
OKG040025	005	03/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	05/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040025	005	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	02/28/2018	.538	.538	21	21
OKG040025	005	03/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	08/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	01/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	04/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	05/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	06/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	07/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	10/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	11/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	12/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	01/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	02/29/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	03/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	04/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	05/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	09/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	11/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	12/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	01/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	02/28/2021	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040025	005	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	04/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	05/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	06/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	08/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040025	005	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	01/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	03/31/2014	1.3	1.3	5	5
OKG040003	001	04/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	09/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	10/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	12/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	01/31/2015	< 1	1.3	< 1	< 1
OKG040003	001	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	03/31/2015	< 1.2	1.2	< 9	9
OKG040003	001	04/30/2015	< .6	.6	5	9
OKG040003	001	05/31/2015	1	1.3	2	3
OKG040003	001	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	12/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	05/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	08/31/2016	< .6	.6	< 1	< 1
OKG040003	001	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	001	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	02/28/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	03/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	08/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	01/31/2019	.646	.646	4	4
OKG040003	001	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	04/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	05/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	06/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	07/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	10/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	11/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	12/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	01/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	02/29/2020	.646	.646	1	1
OKG040003	001	03/31/2020	.646	.646	1	1

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	001	04/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	05/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	09/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	11/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	12/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	01/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	02/28/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	04/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	05/31/2021	.646	.646	16	16
OKG040003	001	06/30/2021	.26	.26	5	5
OKG040003	001	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	08/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	001	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	01/31/2014	0.6	0.6	2.5	4
OKG040003	002	02/28/2014	0.64	0.64	2.5	4
OKG040003	002	03/31/2014	0.97	1.94	8.25	24
OKG040003	002	04/30/2014	1.78	4.5	6.3	10
OKG040003	002	05/31/2014	0.84	1.3	2.3	4
OKG040003	002	06/30/2014	0.6	0.6	2.5	7
OKG040003	002	07/31/2014	1.07	1.07	< 1	< 1
OKG040003	002	08/31/2014	0.5	0.5	3	3
OKG040003	002	09/30/2014	0.6	0.6	< 13	13
OKG040003	002	10/31/2014	0.6	0.6	1	2
OKG040003	002	11/30/2014	0.6	0.6	4	5
OKG040003	002	12/31/2014	0.64	0.64	< 1	< 1
OKG040003	002	01/31/2015	1.3	1.3	< 1	1
OKG040003	002	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	03/31/2015	1.5	1.9	5.6	7
OKG040003	002	04/30/2015	0.8	1.1	12	12
OKG040003	002	05/31/2015	1	1.3	6.3	17
OKG040003	002	06/30/2015	1	1.3	< 2.5	4
OKG040003	002	07/31/2015	< .5	0.5	< 1	< 1
OKG040003	002	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	002	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	12/31/2015	< .54	0.54	< 2	2
OKG040003	002	01/31/2016	< 1.21	2.15	< 1.75	3
OKG040003	002	02/29/2016	< .54	1.07	< 2	3
OKG040003	002	04/30/2016	< .6	0.6	< .1	< .1
OKG040003	002	05/31/2016	< .6	0.6	< 4	4
OKG040003	002	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	08/31/2017	0.969	1.3	8	15
OKG040003	002	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	12/31/2017	0.646	0.646	1	1
OKG040003	002	01/31/2018	1.08	1.08	10	10
OKG040003	002	02/28/2018	1.35	2.15	12.5	20
OKG040003	002	03/31/2018	0.646	0.646	3	4
OKG040003	002	04/30/2018	0.646	0.646	1	1
OKG040003	002	05/31/2018	0.646	0.646	1	1
OKG040003	002	06/30/2018	0.646	0.646	2	2
OKG040003	002	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	08/31/2018	0.91	1.61	2.33	3
OKG040003	002	09/30/2018	0.54	0.54	4	4
OKG040003	002	10/31/2018	0.646	0.646	7	7
OKG040003	002	11/30/2018	0.538	0.538	1	1
OKG040003	002	12/31/2018	1.03	1.29	2	4
OKG040003	002	01/31/2019	1.3	1.3	2	3
OKG040003	002	02/28/2019	0.86	1.3	14.7	38
OKG040003	002	03/31/2019	0.646	0.646	13.25	23
OKG040003	002	04/30/2019	0.97	1.29	6.5	11

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	002	05/31/2019	0.646	0.646	8.3	12
OKG040003	002	06/30/2019	0.646	0.646	27	55
OKG040003	002	07/31/2019	0.646	0.646	7.5	9
OKG040003	002	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	10/31/2019	0.646	0.646	4	4
OKG040003	002	11/30/2019	0.646	0.646	3	5
OKG040003	002	12/31/2019	0.646	0.646	3	4
OKG040003	002	01/31/2020	0.646	0.646	4	6
OKG040003	002	02/29/2020	0.646	0.646	3.5	7
OKG040003	002	03/31/2020	0.646	0.646	1.3	2
OKG040003	002	04/30/2020	0.646	0.646	3.8	7
OKG040003	002	05/31/2020	0.646	0.646	5.67	12
OKG040003	002	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	07/31/2020	0.32	0.32	1	1
OKG040003	002	08/31/2020	0.484	0.646	4	4
OKG040003	002	09/30/2020	1.5	2	22	62
OKG040003	002	10/31/2020	0.17	0.45	3	7
OKG040003	002	11/30/2020	0.071	0.129	2.5	3
OKG040003	002	12/31/2020	0.06	0.06	5	5
OKG040003	002	01/31/2021	0.302	0.646	4.6	8
OKG040003	002	02/28/2021	0.108	0.129	1.67	3
OKG040003	002	03/31/2021	0.129	0.194	2	3
OKG040003	002	04/30/2021	0.1625	0.26	8.5	27
OKG040003	002	05/31/2021	0.55	0.646	12	15
OKG040003	002	06/30/2021	0.66	1.3	12	31
OKG040003	002	07/31/2021	0.06	0.06	1	1
OKG040003	002	08/31/2021	0.054	0.054	6	10
OKG040003	002	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	10/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	11/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	002	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	01/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	02/28/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	03/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	04/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	05/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	06/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	08/31/2014	.81	.81	< 1	< 1
OKG040003	003	09/30/2014	.6	.6	< 8	8
OKG040003	003	10/31/2014	.6	.6	14	14

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	003	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	12/31/2014	.64	.64	6	6
OKG040003	003	01/31/2015	< .6	.6	< 8	8
OKG040003	003	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	03/31/2015	.6	.6	17	25
OKG040003	003	04/30/2015	1.3	1.6	24	26
OKG040003	003	05/31/2015	1.5	1.9	73	165
OKG040003	003	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	12/31/2015	< 1.08	1.08	< 8	8
OKG040003	003	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	05/31/2016	< .6	.6	< 13	13
OKG040003	003	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	02/28/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	03/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	04/30/2018	.646	.646	4	4
OKG040003	003	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	003	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	08/31/2018	1.35	1.61	10	10
OKG040003	003	09/30/2018	.58	.58	2	2
OKG040003	003	10/31/2018	.646	.646	8	8
OKG040003	003	11/30/2018	.538	.538	2	3
OKG040003	003	12/31/2018	.646	.646	6	8
OKG040003	003	01/31/2019	.646	.646	12.5	13
OKG040003	003	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	04/30/2019	.646	.646	12.7	18
OKG040003	003	05/31/2019	.646	.646	12.5	21
OKG040003	003	06/30/2019	.835	1.29	9.6	12
OKG040003	003	07/31/2019	.646	.646	12	12
OKG040003	003	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	10/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	11/30/2019	.646	.646	4.7	10
OKG040003	003	12/31/2019	.646	.646	5	6
OKG040003	003	01/31/2020	.646	.646	1	1
OKG040003	003	02/29/2020	.646	.646	9	9
OKG040003	003	03/31/2020	1.3	1.3	5	5
OKG040003	003	04/30/2020	.646	.646	5.7	11
OKG040003	003	05/31/2020	.646	.646	2.5	4
OKG040003	003	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	09/30/2020	.2476	.4522	3.33	5
OKG040003	003	10/31/2020	.18	.32	26	39
OKG040003	003	11/30/2020	.03	.03	4	4
OKG040003	003	12/31/2020	.006	.006	2	2
OKG040003	003	01/31/2021	.08	.13	15	17
OKG040003	003	02/28/2021	.0226	.0323	12.5	17
OKG040003	003	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	04/30/2021	.068	.13	14.5	25
OKG040003	003	05/31/2021	.33	.39	59	61
OKG040003	003	06/30/2021	.2	.26	13.5	14
OKG040003	003	07/31/2021	.06	.06	15	15
OKG040003	003	08/31/2021	.082	.11	5.5	6
OKG040003	003	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	003	10/31/2021	.0646	.0646	1	1
OKG040003	003	11/30/2021	.13	.13	8	8

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	003	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	01/31/2014	.6	.6	4	6
OKG040003	004	02/28/2014	.64	.64	1.6	3
OKG040003	004	03/31/2014	.65	1.3	7	13
OKG040003	004	04/30/2014	.64	.64	2.5	10
OKG040003	004	05/31/2014	.6	.6	9.5	22
OKG040003	004	06/30/2014	.6	.6	< 1	< 1
OKG040003	004	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	09/30/2014	.6	.6	< 1	< 1
OKG040003	004	10/31/2014	.6	.6	2	2
OKG040003	004	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	12/31/2014	.64	.64	2	2
OKG040003	004	01/31/2015	< .6	.6	< 2	2
OKG040003	004	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	03/31/2015	.6	.6	< 8	8
OKG040003	004	04/30/2015	.8	1.07	14	13
OKG040003	004	05/31/2015	1	1.3	9.5	24
OKG040003	004	06/30/2015	.6	1.3	< 1	2
OKG040003	004	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	12/31/2015	< .54	.54	< 10	10
OKG040003	004	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	05/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	004	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	08/31/2017	.646	.646	14	16
OKG040003	004	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	01/31/2018	.54	.54	10	10
OKG040003	004	02/28/2018	.538	.538	3	3
OKG040003	004	03/31/2018	1.29	1.29	3	3
OKG040003	004	04/30/2018	.646	.646	1.6	3
OKG040003	004	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	08/31/2018	1.08	1.61	6	8
OKG040003	004	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	01/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	02/28/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	03/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	04/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	05/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	06/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	07/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	10/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	11/30/2019	.97	1.3	4	4
OKG040003	004	12/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	01/31/2020	.646	.646	6	6
OKG040003	004	02/29/2020	.646	.646	7	17
OKG040003	004	03/31/2020	.646	.646	2.3	3
OKG040003	004	04/30/2020	.646	.646	9	9
OKG040003	004	05/31/2020	.646	.646	24	24
OKG040003	004	06/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	08/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	09/30/2020	1	2	4	10
OKG040003	004	10/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	11/30/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	12/31/2020	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	004	01/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	02/28/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	03/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	04/30/2021	.19	.19	5	5
OKG040003	004	05/31/2021	.646	.646	14	14
OKG040003	004	06/30/2021	.2	.2	17	17
OKG040003	004	07/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	08/31/2021	.054	.054	3	3
OKG040003	004	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	004	10/31/2021	.0646	.0646	1	1
OKG040003	004	11/30/2021	.0646	.0646	12	12
OKG040003	004	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	01/31/2014	0.6	0.6	14	21
OKG040003	005	02/28/2014	0.64	0.64	11.6	28
OKG040003	005	03/31/2014	0.65	1.3	18	43
OKG040003	005	04/30/2014	0.64	0.64	29.5	37
OKG040003	005	05/31/2014	0.6	1.3	5.75	15
OKG040003	005	06/30/2014	0.6	0.6	1	1
OKG040003	005	07/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	08/31/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	09/30/2014	0.6	0.6	< 3	3
OKG040003	005	10/31/2014	1.3	1.3	9	9
OKG040003	005	11/30/2014	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	12/31/2014	0.64	0.64	14	14
OKG040003	005	01/31/2015	< .6	0.6	< 9	9
OKG040003	005	02/28/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	03/31/2015	0.6	0.6	< 4	4
OKG040003	005	04/30/2015	< .5	0.5	8.5	12
OKG040003	005	05/31/2015	1.3	1.3	4.5	5
OKG040003	005	06/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	07/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	09/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	12/31/2015	< .54	0.54	< 3	3
OKG040003	005	01/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	02/29/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	04/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	05/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	005	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	03/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	04/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	05/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	07/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	08/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	10/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	01/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	02/28/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	03/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	04/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	05/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	06/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	08/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	09/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	10/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	11/30/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	12/31/2018	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	005	01/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	01/31/2014	1.7	1.9	13.5	21
OKG040003	006	02/28/2014	1.62	1.94	3.25	6
OKG040003	006	03/31/2014	1.3	2.6	14	31
OKG040003	006	04/30/2014	2.6	3.2	15.3	22
OKG040003	006	05/31/2014	3.1	5.8	8	11
OKG040003	006	06/30/2014	2.7	4.6	5.5	7
OKG040003	006	07/31/2014	0.97	1.61	15.4	52
OKG040003	006	08/31/2014	7.9	5.9	42.8	158
OKG040003	006	09/30/2014	0.8	1.3	< 1	< 1
OKG040003	006	10/31/2014	1	1	6	6
OKG040003	006	11/30/2014	0.6	0.6	3	4
OKG040003	006	12/31/2014	1.6	2.6	3.75	6

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	006	01/31/2015	1.4	2.6	3	7
OKG040003	006	02/28/2015	0.06	0.06	< 1	1
OKG040003	006	03/31/2015	1.8	2.6	7.75	10
OKG040003	006	04/30/2015	1.2	1.6	13.8	22
OKG040003	006	05/31/2015	1.9	3.2	7	10
OKG040003	006	06/30/2015	1	1.3	4.5	10
OKG040003	006	07/31/2015	< .5	0.5	< 1	1
OKG040003	006	08/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	09/30/2015	< .6	0.6	< 1	< 1
OKG040003	006	10/31/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	11/30/2015	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	12/31/2015	1.61	2.15	7	8
OKG040003	006	01/31/2016	< 1.08	2.15	< 1.5	3
OKG040003	006	02/29/2016	< .81	1.08	< 7	14
OKG040003	006	04/30/2016	< .6	0.6	< 3.6	7
OKG040003	006	05/31/2016	< .6	0.9	< 4.75	8
OKG040003	006	06/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	07/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	08/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	09/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	10/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	11/30/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	12/31/2016	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	01/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	02/28/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	03/31/2017	0.84	1.29	1.67	3
OKG040003	006	04/30/2017	0.538	0.538	3.66	4
OKG040003	006	05/31/2017	0.538	0.538	7.5	10
OKG040003	006	06/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	07/31/2017	0.538	0.538	2	2
OKG040003	006	08/31/2017	0.859	1.29	14	28
OKG040003	006	09/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	10/31/2017	0.646	0.646	4	4
OKG040003	006	11/30/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	12/31/2017	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	01/31/2018	2.15	2.15	7	7
OKG040003	006	02/28/2018	3	5.38	45	88
OKG040003	006	03/31/2018	0.84	1.29	5.33	10
OKG040003	006	04/30/2018	0.646	0.646	5.3	9
OKG040003	006	05/31/2018	0.646	0.646	9	9
OKG040003	006	06/30/2018	0.646	0.646	7	11
OKG040003	006	07/31/2018	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OKG040003	006	08/31/2018	1.38	1.61	3.25	6
OKG040003	006	09/30/2018	0.54	0.54	8	8
OKG040003	006	10/31/2018	0.646	0.646	23	23
OKG040003	006	11/30/2018	1.08	1.61	9	9
OKG040003	006	12/31/2018	1.07	1.94	8	9
OKG040003	006	01/31/2019	1.94	1.94	5	5
OKG040003	006	02/28/2019	1.08	1.3	5.33	8
OKG040003	006	03/31/2019	0.81	1.29	8	12
OKG040003	006	04/30/2019	0.97	1.29	9	11
OKG040003	006	05/31/2019	1.3	2.6	7.3	10
OKG040003	006	06/30/2019	0.861	1.29	14.7	16
OKG040003	006	07/31/2019	0.646	0.646	5	8
OKG040003	006	08/31/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	09/30/2019	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	10/31/2019	0.646	0.646	3	4
OKG040003	006	11/30/2019	0.646	0.646	17.3	38
OKG040003	006	12/31/2019	0.646	0.646	3.5	6
OKG040003	006	01/31/2020	0.646	0.646	9	14
OKG040003	006	02/29/2020	0.646	0.646	6.3	10
OKG040003	006	03/31/2020	1.3	2.6	3.7	8
OKG040003	006	04/30/2020	1.13	2.6	17	27
OKG040003	006	05/31/2020	1.08	1.94	7.7	13
OKG040003	006	06/30/2020	1.6	2.6	9	10
OKG040003	006	07/31/2020	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	08/31/2020	0.71	1.1	5	9
OKG040003	006	09/30/2020	1.62	2.6	2.66	5
OKG040003	006	10/31/2020	0.17	0.19	7.33	13
OKG040003	006	11/30/2020	0.071	0.129	3	4
OKG040003	006	12/31/2020	0.452	0.646	4.5	5
OKG040003	006	01/31/2021	0.93	1.94	11.5	23
OKG040003	006	02/28/2021	0.408	0.646	15	30
OKG040003	006	03/31/2021	0.3875	0.452	26	46
OKG040003	006	04/30/2021	0.322	0.646	12	17
OKG040003	006	05/31/2021	3.5	5	16.5	19
OKG040003	006	06/30/2021	0.2	0.26	9.5	10
OKG040003	006	07/31/2021	0.13	0.13	3	3
OKG040003	006	08/31/2021	0.14	0.16	3.5	5
OKG040003	006	09/30/2021	NODI: C	NODI: C	NODI: C	NODI: C
OKG040003	006	10/31/2021	0.194	0.194	1	1
OKG040003	006	11/30/2021	0.194	0.194	2	2
OKG040003	006	12/31/2021	NODI: C	NODI: C	NODI: C	NODI: C

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0044083	001	05/31/2007	0.52	0.99	Not available	Not available
OK0044083	001	06/30/2007	0.58	1.02	Not available	Not available
OK0044083	001	07/31/2007	0.64	1.21	Not available	Not available
OK0044083	001	08/31/2007	0.76	1.05	Not available	Not available
OK0044083	001	09/30/2007	0.68	1.02	Not available	Not available
OK0044083	001	10/31/2007	0.57	0.87	Not available	Not available
OK0044083	001	11/30/2007	0.17	1.26	Not available	Not available
OK0044083	001	12/31/2007	0.31	0.75	Not available	Not available
OK0044083	001	01/31/2008	0.40	0.79	Not available	Not available
OK0044083	001	02/29/2008	0.35	0.66	Not available	Not available
OK0044083	001	03/31/2008	0.21	0.67	Not available	Not available
OK0044083	001	04/30/2008	0.49	0.87	Not available	Not available
OK0044083	001	05/31/2008	0.36	0.76	Not available	Not available
OK0044083	001	06/30/2008	0.61	0.99	Not available	Not available
OK0044083	001	07/31/2008	0.72	1.37	Not available	Not available
OK0044083	001	08/31/2008	0.95	1.34	Not available	Not available
OK0044083	001	09/30/2008	0.75	1.08	Not available	Not available
OK0044083	001	10/31/2008	0.73	1.13	Not available	Not available
OK0044083	001	11/30/2008	0.32	1.32	Not available	Not available
OK0044083	001	12/31/2008	0.52	0.84	Not available	Not available
OK0044083	001	01/31/2009	0.62	0.88	Not available	Not available
OK0044083	001	02/28/2009	0.66	1.03	Not available	Not available
OK0044083	001	03/31/2009	0.43	1.11	Not available	Not available
OK0044083	001	04/30/2009	0.66	0.94	Not available	Not available
OK0044083	001	05/31/2009	0.79	1.18	Not available	Not available
OK0044083	001	06/30/2009	0.94	1.36	Not available	Not available
OK0044083	001	07/31/2009	1.29	1.96	Not available	Not available
OK0044083	001	08/31/2009	1.34	2.05	Not available	Not available
OK0044083	001	09/30/2009	0.92	1.39	Not available	Not available
OK0044083	001	10/31/2009	0.32	1.16	Not available	Not available
OK0044083	001	11/30/2009	0.51	1.17	Not available	Not available
OK0044083	001	12/31/2009	0.31	0.68	Not available	Not available
OK0044083	001	01/31/2010	0.33	0.96	Not available	Not available
OK0044083	001	02/28/2010	0.32	1.26	Not available	Not available
OK0044083	001	03/31/2010	0.32	0.75	Not available	Not available

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0044083	001	04/30/2010	0.21	0.45	Not available	Not available
OK0044083	001	05/31/2010	0.28	0.62	Not available	Not available
OK0044083	001	06/30/2010	0.82	1.32	Not available	Not available
OK0044083	001	07/31/2010	1.03	1.27	Not available	Not available
OK0044083	001	08/31/2010	1.08	1.55	Not available	Not available
OK0044083	001	09/30/2010	0.87	1.64	Not available	Not available
OK0044083	001	10/31/2010	0.30	0.94	Not available	Not available
OK0044083	001	11/30/2010	0.20	0.64	Not available	Not available
OK0044083	001	12/31/2010	0.14	0.34	Not available	Not available
OK0044083	001	01/31/2011	0.28	0.65	Not available	Not available
OK0044083	001	02/28/2011	0.36	0.94	Not available	Not available
OK0044083	001	03/31/2011	0.28	1.04	Not available	Not available
OK0044083	001	04/30/2011	0.47	0.85	Not available	Not available
OK0044083	001	05/31/2011	0.38	0.70	Not available	Not available
OK0044083	001	06/30/2011	0.62	0.96	Not available	Not available
OK0044083	001	07/31/2011	0.82	1.14	Not available	Not available
OK0044083	001	08/31/2011	0.95	1.25	Not available	Not available
OK0044083	001	09/30/2011	0.71	1.15	Not available	Not available
OK0044083	001	10/31/2011	0.41	0.96	Not available	Not available
OK0044083	001	11/30/2011	0.49	1.31	Not available	Not available
OK0044083	001	12/31/2011	0.29	0.59	Not available	Not available
OK0044083	001	01/31/2012	0.24	0.62	Not available	Not available
OK0044083	001	02/29/2012	0.21	0.45	Not available	Not available
OK0044083	001	03/31/2012	0.24	1.19	Not available	Not available
OK0044083	001	04/30/2012	0.72	1.36	Not available	Not available
OK0000523	01S	05/31/2007	Not available	0.677	Not available	25
OK0000523	01S	06/30/2007	Not available	1.076	Not available	20
OK0000523	01S	07/31/2007	Not available	1.045	Not available	17
OK0000523	01S	08/31/2007	Not available	0.437	Not available	14
OK0000523	01S	09/30/2007	Not available	0.54	Not available	20
OK0000523	01S	10/31/2007	Not available	0.497	Not available	14
OK0000523	01S	11/30/2007	Not available	0.335	Not available	14
OK0000523	01S	12/31/2007	Not available	0.469	Not available	23
OK0000523	01S	01/31/2008	Not available	0.471	Not available	23
OK0000523	01S	02/29/2008	0.295	0.493	14	25
OK0000523	01S	03/31/2008	0.497	0.778	22	28
OK0000523	01S	04/30/2008	0.453	0.766	22	23

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0000523	01S	05/31/2008	0.358	0.464	15	15
OK0000523	01S	06/30/2008	0.322	0.465	15	15
OK0000523	01S	07/31/2008	0.369	0.484	9	12
OK0000523	01S	08/31/2008	0.313	0.436	15	18
OK0000523	01S	09/30/2008	0.316	0.535	14	18
OK0000523	01S	10/31/2008	0.257	0.305	15	22
OK0000523	01S	11/30/2008	0.184	0.256	13	22
OK0000523	01S	12/31/2008	0.197	0.402	2	3
OK0000523	01S	01/31/2009	0.25	0.449	4	7
OK0000523	01S	02/28/2009	0.403	0.549	8	12
OK0000523	01S	03/31/2009	0.31	0.452	12	20
OK0000523	01S	04/30/2009	0.362	0.586	15	18
OK0000523	01S	05/31/2009	0.615	0.827	35	59
OK0000523	01S	06/30/2009	0.407	0.571	23	26
OK0000523	01S	07/31/2009	0.361	0.542	14	15
OK0000523	01S	08/31/2009	0.415	0.674	15	16
OK0000523	01S	09/30/2009	0.368	0.603	8	11
OK0000523	01S	10/31/2009	0.627	1.038	12	18
OK0000523	01S	11/30/2009	0.355	0.759	11	11
OK0000523	01S	12/31/2009	0.409	0.827	9	9
OK0000523	01S	01/31/2010	0.411	0.638	11	12
OK0000523	01S	02/28/2010	0.401	0.59	21	24
OK0000523	01S	03/31/2010	0.546	0.904	20	20
OK0000523	01S	04/30/2010	0.432	0.633	17	22
OK0000523	01S	05/31/2010	0.43	0.734	21	27
OK0000523	01S	06/30/2010	0.395	0.655	11	12
OK0000523	01S	07/31/2010	0.56	0.897	6	9
OK0000523	01S	08/31/2010	0.369	0.591	20	24
OK0000523	01S	09/30/2010	0.351	0.601	11	14
OK0000523	01S	10/31/2010	0.348	0.566	13	14
OK0000523	01S	11/30/2010	0.275	0.452	10	10
OK0000523	01S	12/31/2010	0.281	0.416	14	16
OK0000523	01S	01/31/2011	0.335	0.449	29	48
OK0000523	01S	02/28/2011	0.289	0.422	5	8
OK0000523	01S	03/31/2011	0.266	0.383	16	30
OK0000523	01S	04/30/2011	0.274	0.383	13	14
OK0000523	01S	05/31/2011	0.53	0.703	11	16
OK0000523	01S	06/30/2011	0.298	0.523	13	13
OK0000523	01S	07/31/2011	0.353	0.606	13	16
OK0000523	01S	08/31/2011	0.353	0.606	10	11
OK0000523	01S	09/30/2011	0.323	0.59	9	9
OK0000523	01S	10/31/2011	0.27	0.537	10	13

OPDES No.	Outfall	Monitoring Date	Flow (MGD)		TSS (mg/L)	
			Monthly Ave	Daily Max	Monthly Ave	Daily Max
OK0000523	01S	11/30/2011	0.352	0.583	18	21
OK0000523	01S	12/31/2011	0.324	0.513	19	24
OK0000523	01S	01/31/2012	0.305	0.544	17	23
OK0000523	01S	02/29/2012	0.438	0.652	13	16
OK0000523	01S	03/31/2012	0.448	0.747	13	17
OK0000523	01S	04/30/2012	0.285	0.387	18	21

Appendix C General Method for Estimating Flow for Ungaged Streams and Estimated Flow Exceedance Percentiles

Appendix C

General Method for Estimating Flow for Ungaged Streams

Flow duration curves were developed using existing USGS measured flow where the data existed from a gage on the stream segment of interest, or by estimating flow for stream segments with no corresponding flow record. Flow data to support flow duration curves and load duration curves were derived for each Oklahoma stream segment in the following priority:

- A. In cases where a USGS flow gage occurred on, or within one-half mile upstream or downstream of the Oklahoma stream segment:
 1. If simultaneously collected flow data matching the water quality sample collection date were available, those flow measurements were used.
 2. If flow measurements at the coincident gage were missing for some dates on which water quality samples were collected, the gaps in the flow record were filled, or the record was extended by estimating flow based on measured streamflows at a nearby gages. Based on Land Use and watershed size, an adjacent flow gage was identified and missing flow was estimated by the drainage area ratio.
 3. The flow frequency for the flow duration curves were based on measured flows only. The filled timeseries described above was used to match flows to sampling dates to calculate loads.
 4. On streams impounded by dams to form reservoirs of sufficient size to impact stream flow, only flows measured after the date of the most recent impoundment were used to develop the flow duration curve. This also applied to reservoirs on major tributaries to the streams.
- B. In case no coincident flow data was available for a stream segment, but flow gage(s) were present upstream and/or downstream without a major reservoir between, flows were estimated for the stream segment from an upstream or downstream gage using a watershed area ratio method derived by delineating subwatersheds.
 1. Watershed delineations are performed with predetermined watershed shapefile using ESRI Arc Hydro with a 30-meter resolution National Elevation Dataset digital elevation model and National Hydrography Dataset (NHD) streams. The area of each watershed was calculated following watershed delineation.
 2. Drainage area of the ungaged site was calculated based on watershed delineation. To calculate the contributing drainage area for the ungaged sites, the areas of delineated subwatersheds between the ungaged site and the USGS gaging station were subtracted from or added to the available drainage area of the USGS gaging station,
 3. The average flow was calculated by using the flow at the gaged site multiplied by the drainage area ratio.

- C. In the rare case where no coincident flow data was available for a WQM station and no gages were present upstream or downstream, flows were estimated for the WQM station from a gage on an adjacent watershed of similar size and properties, via the same procedure described previously for upstream or downstream gages.

Appendix Table C-1 Estimated Flow Exceedance Percentiles

Stream Name	Poteau River	Poteau River	Mill Creek	Brushy Creek	Beaver Creek
WBID Segment	OK220100010010_00	OK220100020010_10	OK220600010100_20	OK220600030010_00	OK220600040030_00
USGS Gage Reference	07249413	07247015	07242000	07334000	07247500
USGS Gage Drainage Area (mi ²)			11,052	1,089	120
Drainage Area (mi ²)	1,785	268	78.6	321.7	16.0
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
0	67,003.4	28,101.1	396.9	13,856.6	772.0
1	15,203.4	4,875.1	61.9	3,871.8	225.3
2	11,903.4	2,944.7	41.3	2,778.7	162.7
3	9,845.5	2,171.1	31.0	2,135.2	138.7
4	8,703.4	1,751.1	25.7	1,715.3	119.3
5	8,103.4	1,481.1	22.6	1,422.8	106.7
6	7,797.6	1,251.1	19.7	1,189.4	93.2
7	7,503.4	1,101.1	17.5	1,015.2	82.4
8	7,243.4	990.8	15.8	864.5	73.6
9	7,053.4	874.1	14.2	746.3	64.3
10	6,843.4	799.5	13.0	660.7	56.4
11	6,661.1	721.1	12.0	592.7	49.1
12	6,411.8	659.1	11.3	533.6	43.5
13	6,203.4	602.1	10.5	480.5	37.9
14	5,953.2	543.1	9.8	430.2	33.2
15	5,683.9	502.1	9.3	385.9	30.3
16	5,453.4	462.1	8.8	347.5	27.3
17	5,175.3	424.1	8.3	312.1	24.5
18	4,913.4	398.2	7.8	284.0	22.4
19	4,666.7	364.1	7.5	256.2	20.7

Stream Name	Poteau River	Poteau River	Mill Creek	Brushy Creek	Beaver Creek
WBID Segment	OK220100010010_00	OK220100020010_10	OK220600010100_20	OK220600030010_00	OK220600040030_00
USGS Gage Reference	07249413	07247015	07242000	07334000	07247500
USGS Gage Drainage Area (mi ²)			11,052	1,089	120
Drainage Area (mi ²)	1,785	268	78.6	321.7	16.0
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
20	4,407.4	344.1	7.1	233.2	18.9
21	4,183.4	324.1	6.8	211.9	17.7
22	3,928.8	301.1	6.5	194.5	16.5
23	3,713.4	282.1	6.2	178.3	15.3
24	3,503.4	262.1	6.0	162.6	14.4
25	3,273.4	244.6	5.7	149.0	13.6
26	3,113.4	229.1	5.5	136.1	12.7
27	2,953.4	214.1	5.3	126.1	11.9
28	2,763.4	201.1	5.1	115.9	11.3
29	2,593.7	189.1	4.9	106.2	10.7
30	2,443.4	177.1	4.7	96.9	10.0
31	2,293.4	167.1	4.5	89.6	9.5
32	2,153.4	158.1	4.4	82.3	8.9
33	2,013.4	150.1	4.2	76.3	8.4
34	1,893.4	141.1	4.1	70.4	7.9
35	1,773.4	133.1	3.9	65.4	7.5
36	1,643.4	126.1	3.8	61.0	7.1
37	1,523.4	118.1	3.6	56.3	6.7
38	1,433.4	112.0	3.5	52.4	6.3
39	1,353.4	106.1	3.4	48.9	6.0
40	1,283.4	100.6	3.3	45.6	5.6

Stream Name	Poteau River	Poteau River	Mill Creek	Brushy Creek	Beaver Creek
WBID Segment	OK220100010010_00	OK220100020010_10	OK220600010100_20	OK220600030010_00	OK220600040030_00
USGS Gage Reference	07249413	07247015	07242000	07334000	07247500
USGS Gage Drainage Area (mi ²)			11,052	1,089	120
Drainage Area (mi ²)	1,785	268	78.6	321.7	16.0
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
41	1,193.4	95.1	3.2	42.7	5.4
42	1,103.4	90.1	3.1	39.7	5.1
43	1,023.4	84.1	3.0	37.3	4.8
44	953.4	80.1	2.9	35.0	4.6
45	888.4	75.1	2.8	32.9	4.3
46	825.4	71.1	2.7	31.0	4.1
47	754.0	67.6	2.6	29.1	3.8
48	686.4	63.6	2.5	27.6	3.6
49	627.4	60.1	2.4	26.1	3.3
50	567.4	56.6	2.4	24.6	3.1
51	515.0	53.3	2.3	23.2	2.9
52	464.4	51.1	2.2	22.0	2.7
53	421.1	48.1	2.2	20.7	2.6
54	386.4	45.4	2.1	19.6	2.4
55	344.3	43.1	2.0	18.7	2.3
56	314.4	40.1	2.0	17.9	2.1
57	286.4	38.1	1.9	17.0	2.0
58	259.5	35.8	1.9	16.1	1.9
59	237.4	33.7	1.8	15.5	1.7
60	217.4	31.7	1.7	14.6	1.6
61	198.7	30.1	1.7	14.0	1.5

Stream Name	Poteau River	Poteau River	Mill Creek	Brushy Creek	Beaver Creek
WBID Segment	OK220100010010_00	OK220100020010_10	OK220600010100_20	OK220600030010_00	OK220600040030_00
USGS Gage Reference	07249413	07247015	07242000	07334000	07247500
USGS Gage Drainage Area (mi ²)			11,052	1,089	120
Drainage Area (mi ²)	1,785	268	78.6	321.7	16.0
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
62	187.4	28.3	1.7	13.4	1.4
63	174.4	26.6	1.6	12.8	1.3
64	162.4	24.7	1.5	12.2	1.2
65	149.4	22.7	1.5	11.7	1.1
66	141.0	20.9	1.5	11.4	1.0
67	132.4	19.1	1.4	10.8	0.9
68	124.4	18.1	1.4	10.5	0.9
69	116.4	16.5	1.3	10.2	0.8
70	108.4	15.4	1.3	9.9	0.7
71	102.2	14.2	1.3	9.5	0.7
72	94.6	13.1	1.2	9.1	0.6
73	89.1	12.1	1.2	8.8	0.6
74	82.5	11.1	1.1	8.4	0.5
75	77.4	10.5	1.1	8.3	0.5
76	73.2	9.9	1.1	8.0	0.5
77	69.2	9.3	1.0	7.7	0.4
78	64.4	8.7	1.0	7.5	0.4
79	61.3	8.1	1.0	7.2	0.4
80	57.4	7.7	0.9	6.9	0.3
81	54.4	7.2	0.9	6.6	0.3
82	51.4	6.7	0.8	6.3	0.3

Stream Name	Poteau River	Poteau River	Mill Creek	Brushy Creek	Beaver Creek
WBID Segment	OK220100010010_00	OK220100020010_10	OK220600010100_20	OK220600030010_00	OK220600040030_00
USGS Gage Reference	07249413	07247015	07242000	07334000	07247500
USGS Gage Drainage Area (mi ²)			11,052	1,089	120
Drainage Area (mi ²)	1,785	268	78.6	321.7	16.0
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
83	48.1	6.3	0.8	6.2	0.2
84	45.4	5.9	0.8	6.0	0.2
85	42.7	5.4	0.7	5.7	0.2
86	40.7	5.1	0.7	5.4	0.2
87	38.7	4.8	0.7	5.1	0.1
88	36.0	4.5	0.6	4.7	0.1
89	33.1	4.2	0.6	4.3	0.1
90	30.4	3.9	0.6	3.9	0.1
91	28.4	3.6	0.5	3.5	0.1
92	26.1	3.4	0.5	3.1	0.1
93	24.4	3.1	0.5	2.8	0.0
94	22.4	2.9	0.4	2.6	0.0
95	20.4	2.6	0.4	2.4	0.0
96	18.4	2.3	0.4	2.2	0.0
97	16.1	2.0	0.3	2.0	0.0
98	14.0	1.6	0.3	1.9	0.0
99	12.0	1.3	0.2	1.9	0.0
100	3.8	1.1	0.0	1.9	0.0

Stream Name	Terrapin Creek	Red River	Caney Creek	North Boggy Creek
WBID Segment	OK410210020150_00	OK410400010010_20	OK410400020200_00	OK410400080010_00
USGS Gage Reference	07337900	07335500	07334800	07334000
USGS Gage Drainage Area (mi ²)	320		649	1,089
Drainage Area (mi ²)	56.5	36,517	31.5	121.2
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
0	9,375.5	388,000.0	1,431.8	5,219.7
1	1,196.9	61,100.0	418.6	1,469.1
2	780.2	51,144.0	285.5	1,053.5
3	571.7	45,500.0	244.4	810.0
4	448.5	41,200.0	184.5	650.1
5	367.3	37,700.0	151.8	536.4
6	313.6	34,300.0	127.2	449.6
7	270.1	31,500.0	109.5	383.9
8	236.6	28,700.0	95.0	325.0
9	208.3	26,100.0	80.1	280.5
10	188.9	23,620.0	71.5	248.2
11	170.9	21,800.0	64.1	222.6
12	156.3	20,200.0	56.3	200.3
13	143.4	18,700.0	49.0	179.2
14	133.5	17,400.0	42.7	161.4
15	123.6	16,300.0	38.1	144.7
16	114.9	15,300.0	34.3	129.1
17	107.5	14,300.0	30.4	116.6
18	101.5	13,500.0	26.5	105.7
19	95.3	12,800.0	24.4	95.6
20	89.9	12,100.0	22.4	86.8

Stream Name	Terrapin Creek	Red River	Caney Creek	North Boggy Creek
WBID Segment	OK410210020150_00	OK410400010010_20	OK410400020200_00	OK410400080010_00
USGS Gage Reference	07337900	07335500	07334800	07334000
USGS Gage Drainage Area (mi ²)	320		649	1,089
Drainage Area (mi ²)	56.5	36,517	31.5	121.2
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
21	85.3	11,600.0	20.4	78.9
22	80.7	10,900.0	19.2	72.2
23	76.6	10,400.0	17.8	66.2
24	72.9	9,810.0	16.4	60.3
25	69.2	9,290.0	15.5	55.2
26	66.4	8,860.0	14.4	50.3
27	63.4	8,450.0	13.3	46.6
28	60.7	8,081.6	12.5	42.7
29	57.9	7,690.0	11.8	39.1
30	55.3	7,390.0	11.0	35.7
31	52.8	7,120.0	10.4	32.9
32	50.5	6,850.0	9.8	30.3
33	48.0	6,630.0	9.2	28.0
34	46.1	6,380.0	8.7	25.8
35	44.0	6,150.0	8.2	23.9
36	42.0	5,940.0	7.8	22.3
37	40.3	5,750.0	7.4	20.5
38	38.5	5,580.0	7.1	19.0
39	36.9	5,400.0	6.7	17.6
40	35.5	5,240.0	6.3	16.4
41	33.9	5,090.0	5.9	15.2

Stream Name	Terrapin Creek	Red River	Caney Creek	North Boggy Creek
WBID Segment	OK410210020150_00	OK410400010010_20	OK410400020200_00	OK410400080010_00
USGS Gage Reference	07337900	07335500	07334800	07334000
USGS Gage Drainage Area (mi ²)	320		649	1,089
Drainage Area (mi ²)	56.5	36,517	31.5	121.2
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
42	32.5	4,940.0	5.5	14.1
43	31.1	4,800.0	5.2	13.2
44	29.7	4,660.0	5.0	12.5
45	28.4	4,530.0	4.8	11.7
46	27.0	4,391.2	4.5	10.9
47	25.8	4,280.0	4.3	10.2
48	24.5	4,150.0	4.1	9.7
49	23.3	4,060.0	3.8	9.1
50	22.2	3,950.0	3.6	8.5
51	21.2	3,860.0	3.4	8.0
52	20.1	3,740.0	3.2	7.6
53	18.9	3,660.0	3.1	7.0
54	18.0	3,570.0	2.9	6.7
55	17.0	3,490.0	2.8	6.3
56	15.9	3,410.0	2.7	5.9
57	14.8	3,320.0	2.6	5.7
58	13.8	3,250.0	2.5	5.3
59	12.9	3,160.0	2.4	5.1
60	12.0	3,080.0	2.3	4.8
61	11.3	3,010.0	2.2	4.6
62	10.6	2,930.0	2.1	4.3

Stream Name	Terrapin Creek	Red River	Caney Creek	North Boggy Creek
WBID Segment	OK410210020150_00	OK410400010010_20	OK410400020200_00	OK410400080010_00
USGS Gage Reference	07337900	07335500	07334800	07334000
USGS Gage Drainage Area (mi ²)	320		649	1,089
Drainage Area (mi ²)	56.5	36,517	31.5	121.2
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
63	9.9	2,880.0	2.0	4.1
64	9.2	2,800.0	1.9	3.9
65	8.7	2,740.0	1.9	3.7
66	7.9	2,680.0	1.8	3.6
67	7.2	2,610.0	1.7	3.3
68	6.5	2,550.0	1.7	3.2
69	6.0	2,480.0	1.6	3.1
70	5.5	2,420.0	1.5	3.0
71	4.9	2,370.0	1.5	2.8
72	4.5	2,290.0	1.4	2.7
73	4.1	2,200.0	1.4	2.6
74	3.7	2,140.0	1.3	2.4
75	3.4	2,080.0	1.3	2.4
76	3.0	2,010.0	1.2	2.3
77	2.6	1,950.0	1.2	2.2
78	2.4	1,880.0	1.1	2.1
79	2.1	1,810.0	1.1	2.0
80	1.9	1,740.0	1.1	1.9
81	1.7	1,670.0	1.0	1.8
82	1.5	1,590.0	1.0	1.7
83	1.4	1,530.0	1.0	1.6

Stream Name	Terrapin Creek	Red River	Caney Creek	North Boggy Creek
WBID Segment	OK410210020150_00	OK410400010010_20	OK410400020200_00	OK410400080010_00
USGS Gage Reference	07337900	07335500	07334800	07334000
USGS Gage Drainage Area (mi ²)	320		649	1,089
Drainage Area (mi ²)	56.5	36,517	31.5	121.2
Percentile	Q (cfs)	Q (cfs)	Q (cfs)	Q (cfs)
84	1.3	1,460.0	0.9	1.6
85	1.1	1,380.0	0.9	1.4
86	1.0	1,310.0	0.8	1.3
87	0.9	1,240.0	0.8	1.2
88	0.7	1,200.0	0.7	1.0
89	0.6	1,110.0	0.7	0.9
90	0.5	1,030.0	0.6	0.7
91	0.4	949.0	0.5	0.6
92	0.4	864.2	0.4	0.5
93	0.3	794.0	0.3	0.3
94	0.2	712.0	0.3	0.2
95	0.2	624.0	0.2	0.2
96	0.1	550.0	0.2	0.1
97	0.1	475.0	0.2	0.1
98	0.0	407.0	0.1	0.0
99	0.0	315.0	0.1	0.0
100	0.0	134.0	0.0	0.0

Appendix D Censored Data Estimation for Southeast Oklahoma Study Area

Censored Data Estimation for the Southeast Oklahoma Study Area


1. Background

Sample size is an important feature of any empirical study. In this Study, 5 out of 7 waterbodies in the Study Area have four or less countable TSS data, as small as two countable data in Brushy Creek (OK220600030010_00) shown in **Appendix Table D-1**. Beneficial use of these waterbodies is WWAC, except for Terrapin Creek (CWAC). The small sample size (less than 25) has been shown to produce estimates with large bias and poor statistical representation. To lessen these problems, sample data were combined based on their Planning Basins. It is assumed as log-normal distribution with equivalent mean (μ) and standard deviation (σ). This assumption can hold because of the vicinity of waterbodies and similarity of watershed Land Uses.


Appendix Table D-1 Censored TSS Data in Base Flow for WWAC Waterbodies

Waterbody Name (ID)	Sampling Period	Total Number of TSS Data	Number of Censored Data	% of Censored Data
Mill Creek (OK220600010100_20)	2013 - 2019	26	23	88.5%
Brushy Creek (OK220600030010_10)	2009 - 2019	11	9	81.8%
Caney Creek (OK410400020200_00)	2015 - 2017	14	7	50.0%
North Boggy Creek (OK410400080010_00)	2015 - 2017	16	12	75.0%
Total		67	51	76.1%

Combined turbidity distributions were compared with TSS estimated distribution to determine the best estimation method for non-detects. **Appendix Figure D-1** showed log normal distribution for turbidity and same distribution was assumed for TSS based on turbidity and TSS relationship in Basins 2 and 4. Because of the similarity of turbidity distribution in Basins 2 and 4, TSS estimation comparisons were made for Basin 2 only. Methods for estimating these TSS non-detects (censored data) can be divided into the three classes: simple substitution, distributional, and robust methods. These estimated TSS distributions were compared against turbidity distribution.

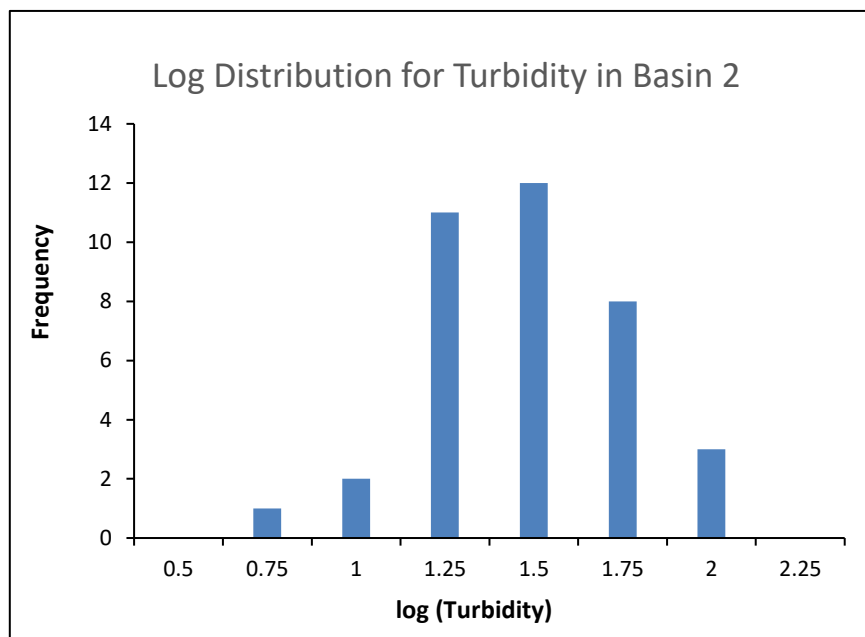Appendix Figure D-1 Histogram of Turbidity Data

a) Log Distirbution for Basin 2

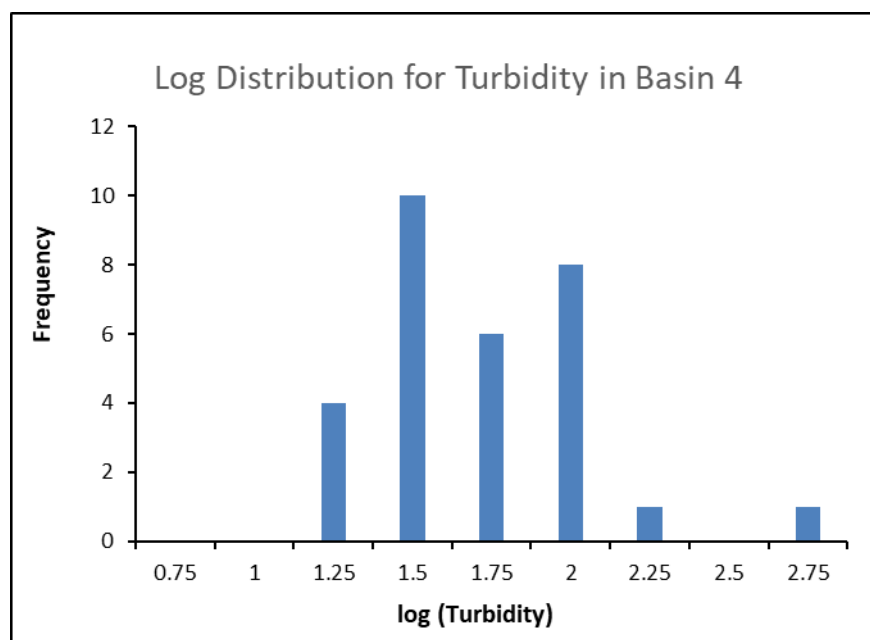


b) Log Distirbution for Basin 4


2. Simple Substitution Methods

Simple substitution methods substitute a single value such as one-half the reporting limit for each less-than values (censored data). Summary statistics are calculated and shown in **Appendix Table D-2** and **Appendix Figure D-2**.


The distribution resulting from simple substitution methods have large gaps and do not appear realistic. Substitution of one produced estimates of mean and median which were biased low, while substituting the reporting limit resulted in estimates above the true value. Results for the standard deviation and interquartile range (IQR), and for substituting one-half the reporting limit, were also far less desirable than alternative methods discussed below.

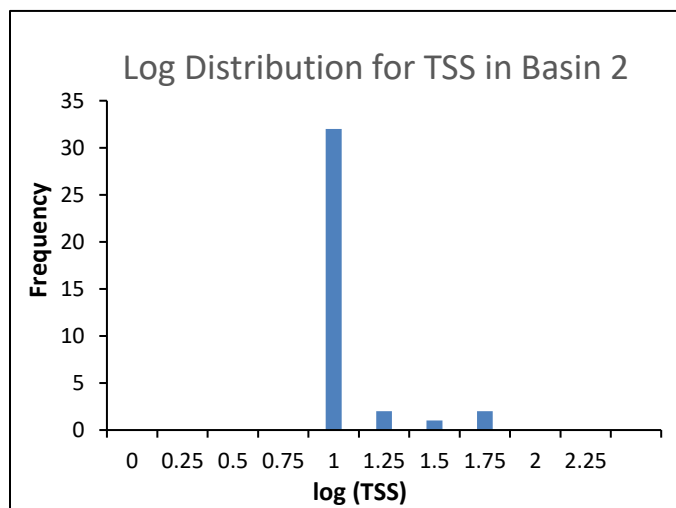Appendix Figure D-2 Histograms for Simple Substitution

(a) Substitution for the detection limit

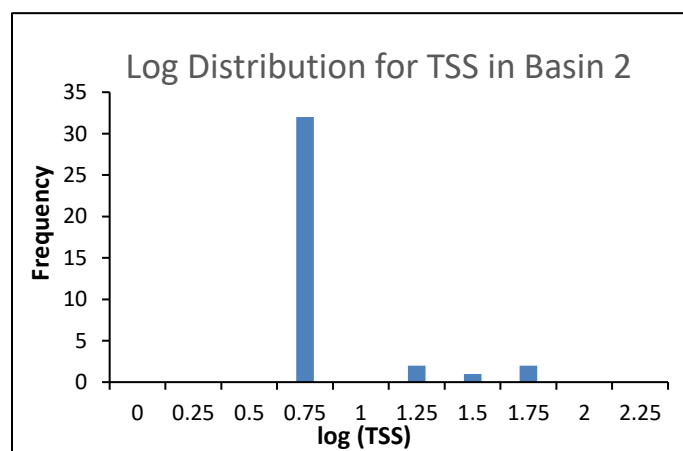

(b) Substitution for one-half of the detection limit to all non-detects

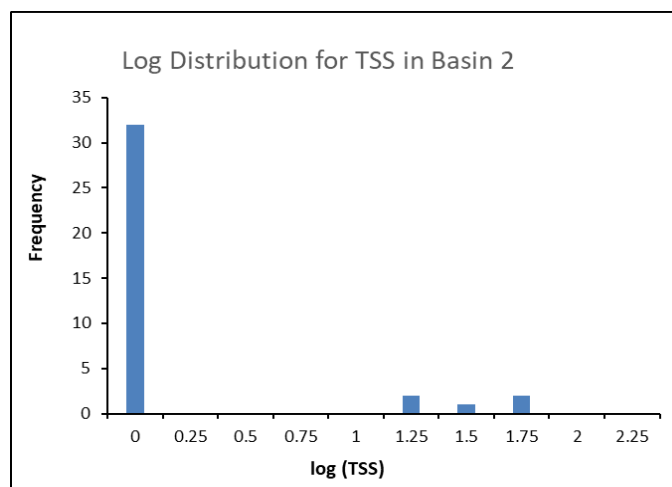(c) Substitution for one $[(\log(\text{TSS}) = 0)]$ to all non-detects

3. Distributional Methods

Distributional methods use the characteristics of an assumed distribution to estimate summary statistics. Data both below (non-detects) and above (detects) the reporting limit are assumed follow a log-normal distribution. Given a distribution, estimates of summary statistics are computed which best match the observed concentrations above the reporting limit and the percentage of data below the limit. Maximum-likelihood estimation (MLE) is used to estimate summary statistics in this study.

Cohen's procedure can be used for left-censored lognormal distribution (Gilbert, 1987). This hand calculated estimation is compared with estimation results from EXCEL and R (**Appendix Table D-2**). Cohen's procedure is followed below:

$$h = \frac{(n - k)}{n}$$

$$\bar{y}_u = \frac{\sum_{i=1}^k y_i}{k}$$

$$s_u^2 = \frac{\sum_{i=1}^k (y_i - \bar{y}_u)^2}{k}$$

$$\hat{\gamma} = \frac{s_u^2}{(\bar{y}_u - y_0)^2}$$

$$\hat{\mu}_y = \bar{y}_u - \hat{\lambda}(\bar{y}_u - y_0)$$

$$\hat{\sigma}_y^2 = s_u^2 + \hat{\lambda}(\bar{y}_u - y_0)^2$$

$$\hat{\mu} = \exp\left(\hat{\mu}_y + \frac{\hat{\sigma}_y^2}{2}\right)$$


$$\hat{\sigma}^2 = \hat{\mu}^2 [\exp(\hat{\sigma}_y^2) - 1]$$

Where n = total number of observed TSS, k = number out of n that are above dl, $y_i = \ln(\text{TSS})_i$, $y_0 = \ln(\text{dl})$, $\hat{\lambda} = 3.2$ based on h and $\hat{\gamma}$ from Table A15 (Gilbert, 1987), $\hat{\mu}$ = the mean of the lognormal distribution, and $\hat{\sigma}^2$ = the variance of the lognormal distribution.

For EXCEL, calculation includes following steps that are described below:

- Build normal distribution curve for log-transformed TSS data with guessed μ and σ .
- Draw probability density function (pdf) for detects.
- Minimize area difference under the curve for above two distribution curves in the same range of x-axis with solver in EXCEL by changing μ and σ .

Appendix Figure D-3 EXCEL Histograms of Distributional Methods (MLE)

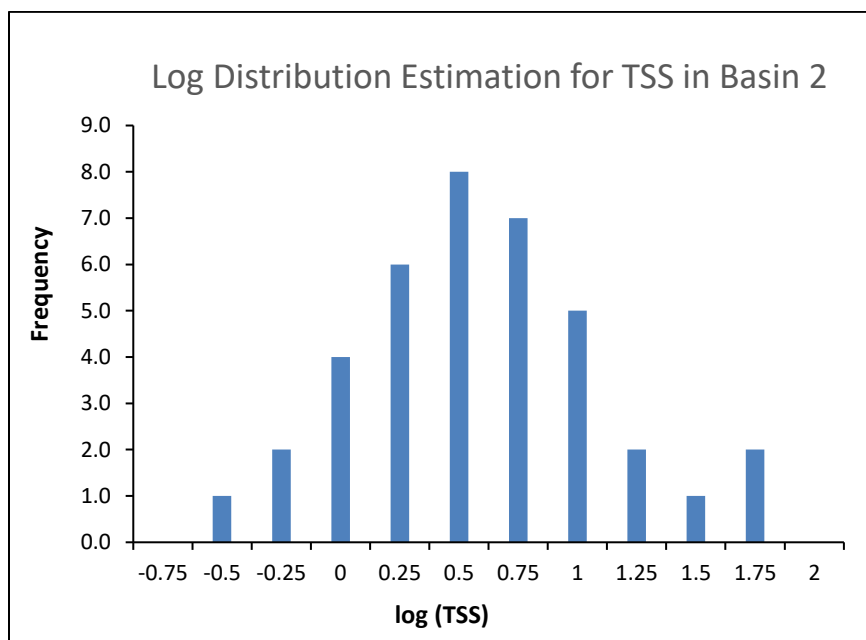

For R, the R code shown below can be used.


```
read.csv("C:/Users/Documents/R/Basin2.csv", header=T)
data=read.csv("C:/Users/257691/Documents/R/Basin2.csv", header=T)
data_mle=with(data,cenmle(TSS,TSScen), dis='lognormal')
data_mle
quantile(data_mle)
```

4. Robust Methods


Robust methods combine observed data above the reporting limit with below-limit values extrapolated assuming a distributional shape, in order to compute estimates of summary statistics. A distribution is fit to the data above the reporting limit by either MLE or probability plot procedures, but the fitted distribution is used only to extrapolate a collection of values below the reporting limit.

First, Regression of log of concentration (TSS) verse normal score is used to extrapolate “fill-in” values below the reporting limit. Then, these “fill-ins” are retransformed back to original units, and combined with data above the reporting limit to compute estimates of summary statistics.

Appendix Figure D-4 Robust Method of Estimating TSS for Basin 2

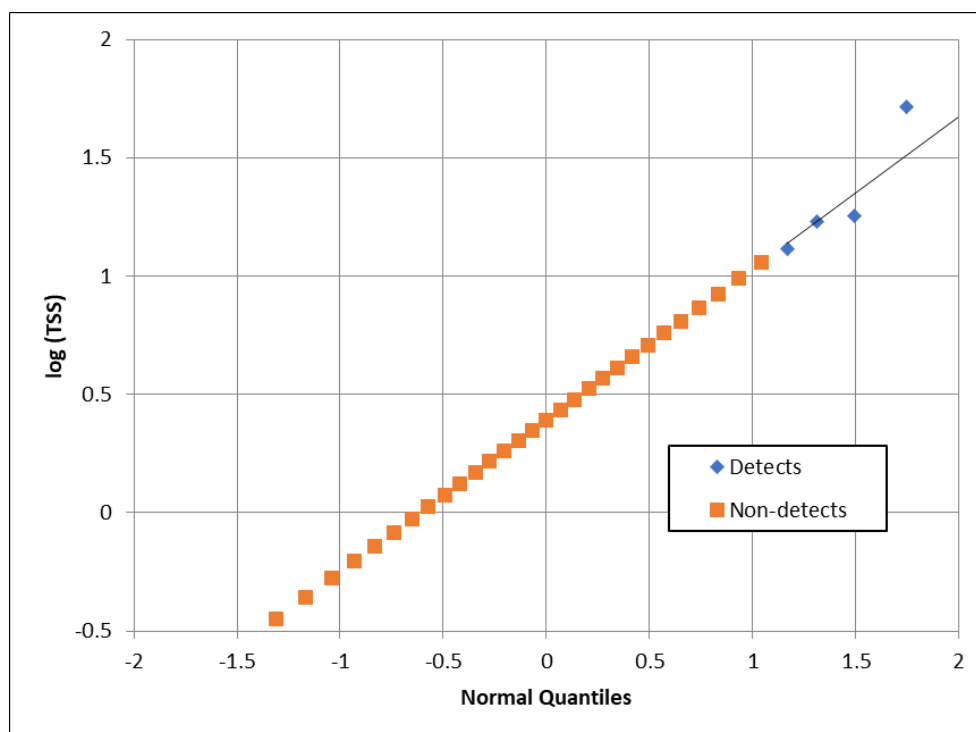

(a) Normal Quantiles

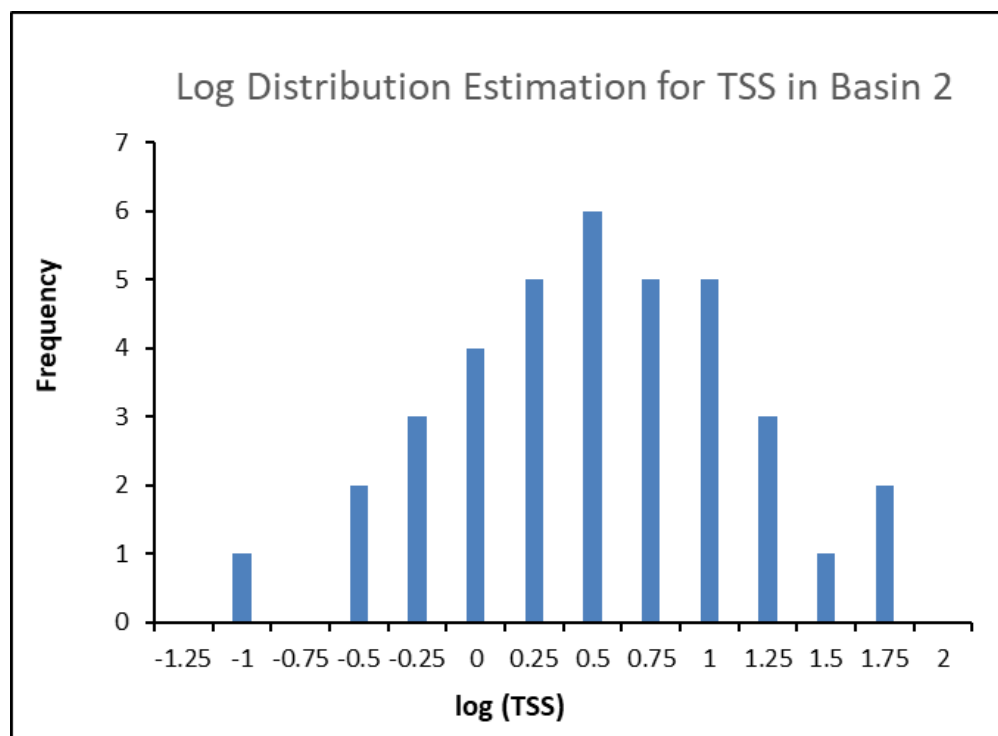

(b) Histogram for Robust Regression on Order Statistics (ROS)

For R, the example R code shown below can be used for ROS.

```
read.csv("C:/Users/257691/Documents/R/Basin2.csv", header=T)
```

```
data=read.csv("C:/Users/257691/Documents/R/Basin2.csv", header=T)
data_ROS=with(data,ros(TSS,TSSCen))
with(data,ros(TSS,TSSCen))
mean(data_ROS)
sd(data_ROS)
median(data_ROS)
quantile(data_ROS)
```

5. Results

Both Robust ROS and MLE with software R have shown to perform well for estimating the median and IQR in this Study when comparing to turbidity distribution. The percentage of non-detect values are greater than 75%. Therefore, the 75th percentile value falls under these non-detect values which are less than 10 mg/L. Both Robust ROS and MLE with software R had closer estimations with “dl/2 subbed” for mean and standard deviation than those estimations with software EXCEL.

Use of these methods rather than simple substitution methods for censored data should substantially lower estimation errors for summary statistics. However, extrapolating censored data obtained using one of the estimation methods listed in **Appendix Table D-2** may produce coefficients strongly dependent on the values extrapolated in the regression analysis. Therefore, alternative methods capable of incorporating censored observations are described in **Appendix E**. In this study, dl substitution was used for conservative PRG calculation because dl is believed to be greater than actual concentration of censored data.

Appendix Table D-2 Log Distribution Summary Statistics for Basin 2

Category	Censored Data Estimation		Mean	Standard Deviation	25 th Percentile	Median	75 th Percentile	IQR
Turbidity	All detects		1.36	0.29	1.16	1.34	1.56	0.41
Log (TSS)	dl subbed		1.06	0.17	1.0	1.0	1.0	0
	dl/2 subbed		0.79	0.26	0.70	0.70	0.70	0
	One [log(TSS)=0]subbed		0.19	0.5	0	0	0	0
	MLE	Cohen's procedure	0.24	3.18	n/a	n/a	n/a	n/a
		EXCEL	0.57	0.47	n/a	n/a	n/a	n/a
		R	0.63	0.4	0.35	0.53	0.78	0.43
	Robust ROS	EXCEL	0.39	0.64				
		R	0.64	0.38	0.37	0.54	0.79	0.42

n/a = not available

References

Gilbert, R.O. 1987. Statistical Methods for Environmental Pollution Monitoring. Wiley.

Appendix E Censored Data Regression for Southeast Oklahoma Study Area

Censored Data Regression for the Southeast Oklahoma Study Area

1. Background

With censored data the use of ordinary least squares (OLS) for regression is prohibited (Helsel and Hirsch, 2002). Coefficients for slopes and intercept cannot be computed without values for the censored observations, and substituting fabricated values may produce coefficients strongly dependent on the values substituted. Two alternative methods capable of incorporating censored observations are described below. All data were log-transformed and censored data were set as a range from one (TSS=1 mg/L; $\log(\text{TSS}) = 0$) to detection limit (TSS=10 mg/L; $\log(\text{TSS}) = 1$).

2. Maximum Likelihood Estimation (MLE)

Maximum likelihood estimation (MLE) in the presence of censored data is very similar to the estimation that occurs when conducting a standard linear regression. The difference is that the likelihood that is computed when censored values are present explicitly accounts for the values below the detection limit (dl).

Assumptions for correlation and regression type maximum likelihood estimators include:

- The presence of a linear trend in the data;
- Observations are approximately normally distributed about the estimated trend line;
- Variances are approximately equal in magnitude at all points along the trend line; and
- Independent observations.

The relationship between two variables is presented with the correlation coefficient (R^2 or Tau) and p-value in **Appendix Table E-1**.

3. Non-Parametric Approaches

Non-parametric measures of association tend to evaluate the monotonic association between two variables. This means that such methods are evaluating whether values of the response tend to increase as values of the explanatory variable increase (or vice versa). These non-parametric measures do not quantify how big the increase or decrease is, merely whether there is an increase or decrease. This means that non-parametric methods should be useful at evaluating whether there is an increasing or decreasing trend in the data, regardless of whether or not it is linear.


One of the most popular non-parametric measures of association between variables in water quality is Kendall's tau (Huston & Juarez-Colunga, 2009). Like other measures of correlation, Kendall's tau falls between -1 and 1, where values close to 1 indicate a strong positive association and values close to -1 indicate a strong negative association. Values of tau near 0 indicate little or no association. Kendall's tau was used in this study because of the high number of non-detects (censored data). Because tau depends only on the ranks of the data and not the values themselves, it can be used in cases where some of the data are censored (Helsel and Hirsch, 2002).

To estimate regression coefficient and correlation when censored observations are present, the following R¹¹ code shown as an example for North Boggy Creek:



```
read.csv("C:/TMDL/NBoggyCrk_MLE.csv", header=T)
data=read.csv("C:/TMDL/NBoggyCrk_MLE.csv", header=T)
with(data,cenxyplot(x=Turbidity,xcen=0,y=TSS,ycen=TSSCen,log="",
main="North Boggy Creek (OK410400080010_00)",
xlab="log (Turbidity)",
ylab="log (TSS)",
)
)
mle.reg=cenreg(Cen(obs=data$TSS,censored=data$TSSCen)~data$Turbidity,dist="gaussian")
data.Kendall=cenken(y=data$TSS, ycen=data$TSSCen,x=data$Turbidity,xcen=data$TurCen)
abline(mle.reg,lty=4,lwd=2)
lines(data.Kendall,lwd=2)
legend(x="left",legend=c("Kendall","MLE"),lty=c(1,4),lwd=2)
data.Kendall
mle.reg
```



4. Results


Appendix Figure E-1 Trendlines Estimated for Mill Creek

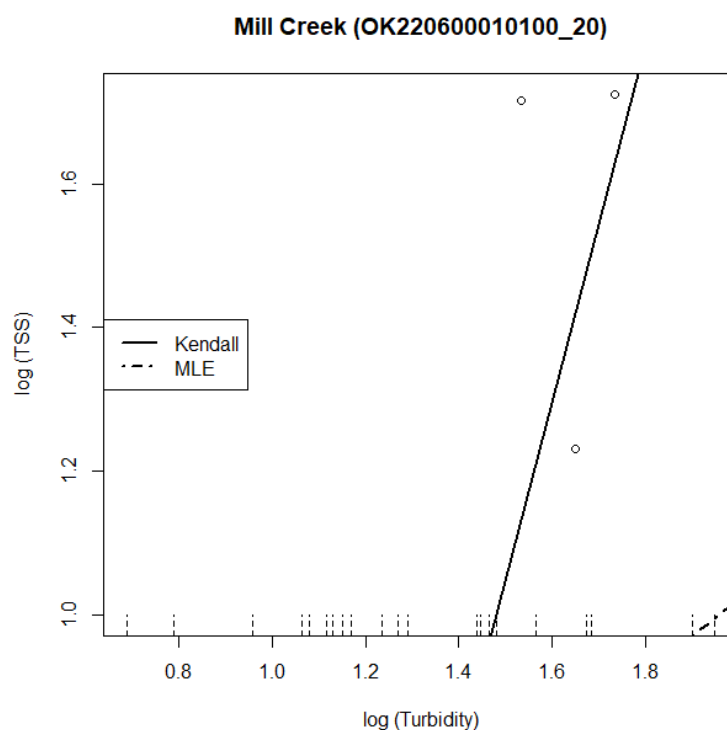

¹¹ R is a computer language and environment for statistical computing and graphics. <http://www.r-project.org/>

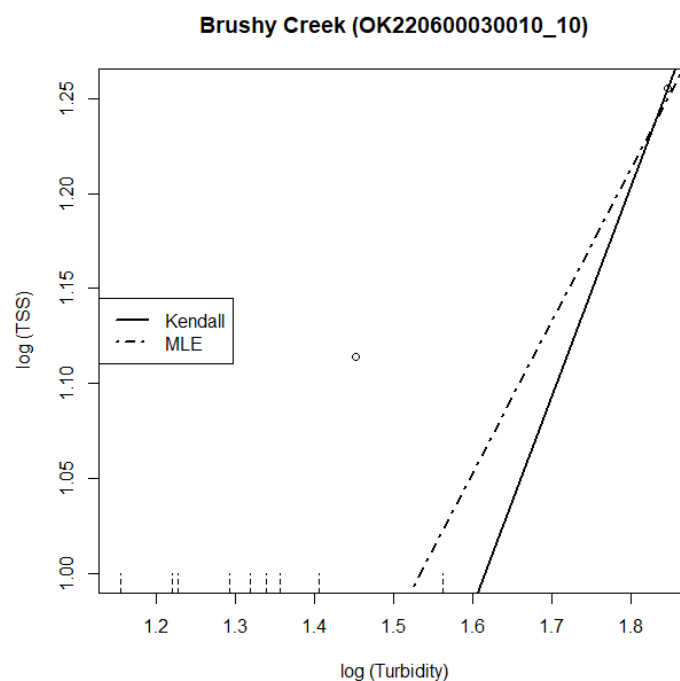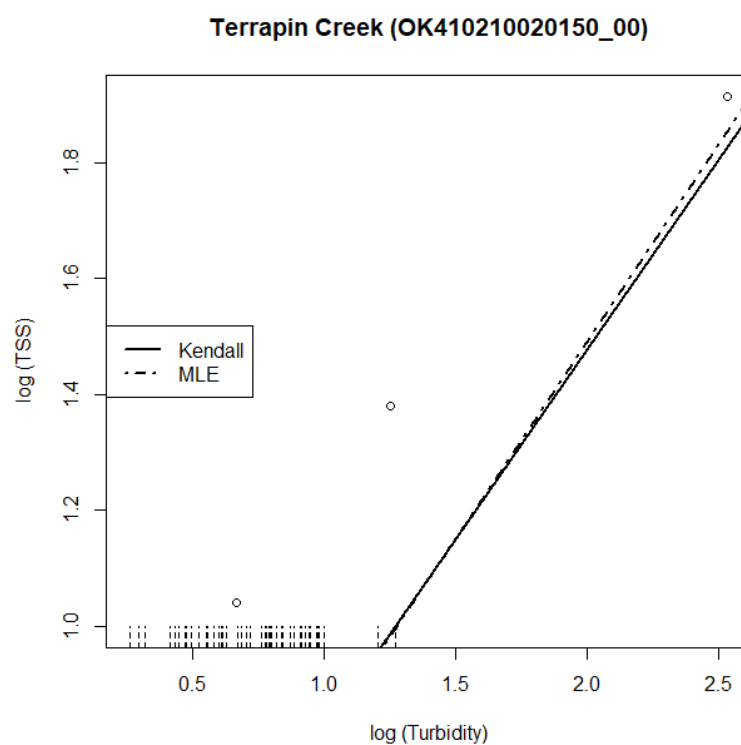Appendix Figure E-2 Trendlines Estimated for Brush Creek**Appendix Figure E-3 Trendlines Estimated for Terrapin Creek**

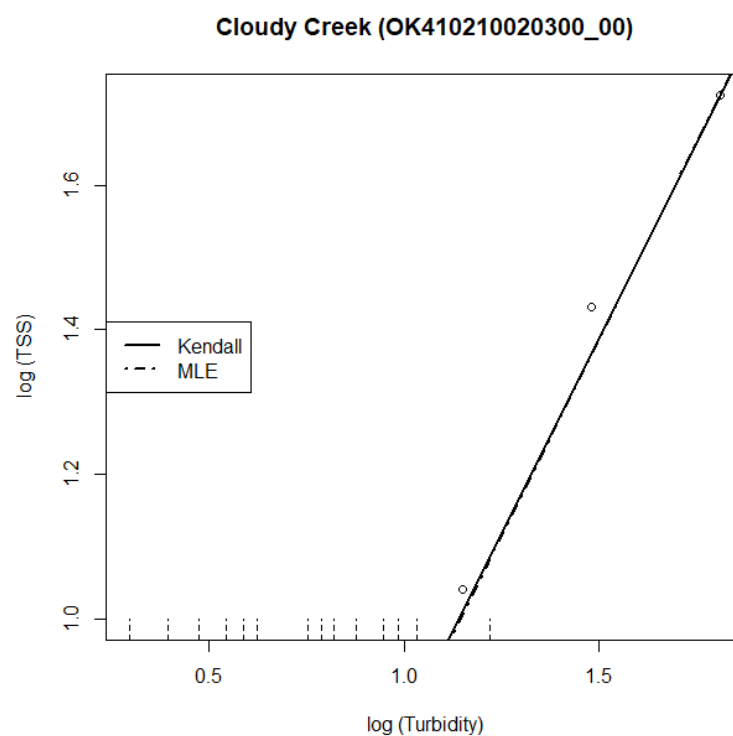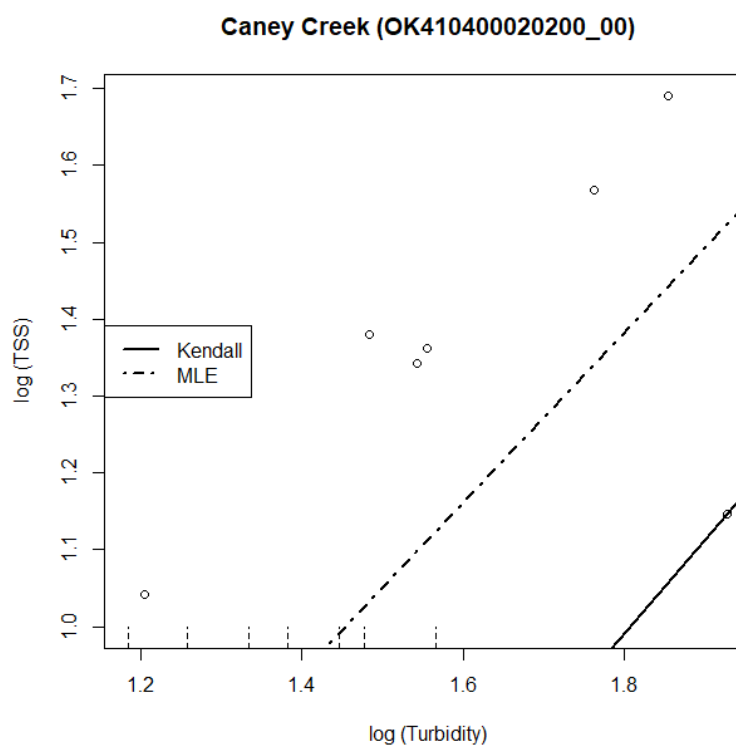Appendix Figure E-4 Trendlines Estimated for Cloudy Creek**Appendix Figure E-5 Trendlines Estimated for Caney Creek**

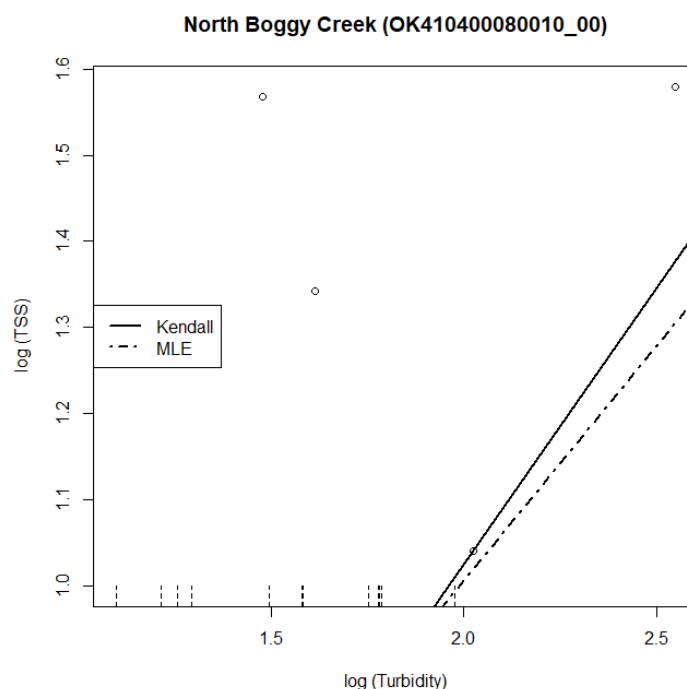Appendix Figure E-6 Trendlines Estimated for North Boggy Creek

Non-parametric methods have been described as robust compared to parametric ones. This means that when extreme outliers are present, or the distribution of points is highly unusual, non-parametric methods are recommended. In less extreme situations, non-parametric methods performed similarly or slightly worse than MLE methods (Huston & Juarez-Colunga, 2009). In this Study, neither the MLE method nor Kendall's tau could produce an acceptable R-square value for the four waterbodies (Mill Creek, Terrapin Creek, Caney Creek, and North Boggy Creek); see **Appendix Table E-1**. Therefore, the regression statistics for the four waterbodies were derived from nearby waterbodies and from previous turbidity TMDL reports. Terrapin Creek (OK410210020150_00) was derived from Cloudy Creek (OK410210020300_00) from the 2014 Bacterial and Turbidity Total Maximum Daily Loads for the Oklahoma Lower Red River – Little River Basin Study Area) Report. Mill Creek (OK220600010100_20), Brushy Creek (OK220600030010_00) and North Boggy Creek (OK410400080010_00) were derived from Brushy Creek (OK220600030010_10). Brushy Creek (OK220600030010_10) is in vicinity with Mill Creek and North Boggy Creek and similar land use types with those waterbodies.

Appendix Table E-1 Regression Statistics with Censored Data

WBID	Waterbody Name	MLE Method					Non-parametric Method				
		TSS Target (mg/L)	Slope	Intercept	Loglik-r (R ²)	p-value	TSS Target (mg/L)	Slope	Intercept	Tau	p-value
OK220600010100_20	Mill Creek	7.4	0.51	-0.01	0.32 (0.10)	0.096	34.9	2.49	-2.68	0.14	0.030
OK220600030010_00	Brushy Creek	13.6	0.80	-0.23	0.69 (0.47)	0.008	12.4	1.11	-0.79	0.31	0.017
OK410210020150_00	Terrapin Creek	6.5	0.68	0.13	0.62 (0.38)	7.1 E-07	6.6	0.65	0.17	0.07	0.022
OK410210020300_00	Cloudy Creek	6.93	1.09	-0.25	0.86 (0.74)	7.3 E-07	7.0	1.08	-0.23	0.30	0.001
OK410400020200_00	Caney Creek	18.6	1.11	-0.61	0.63 (0.22)	0.008	7.4	1.22	-1.20	0.42	0.025
OK410400080010_00	North Boggy Creek	7.0	0.54	-0.08	0.42 (0.18)	0.078	6.8	0.64	-0.25	0.18	0.162

References

Helsel, D.R., and Hirsch R.M., 2002. Statistical Methods in Water Resources. Techniques of Water-Resources Investigations, Book 4, Chapter. A3, U.S. Geological Survey, 522 p., <http://pubs.usgs.gov/twri/twri4a3/>

Huston, C and E Juarez-Colunga 2009. Guidelines for computing summary statistics for data-sets containing non-detects. Department of Statistics and Actuarial Science, Simon Fraser University.

Appendix F Direct Calculation of Percent Reduction Goals from Turbidity Data

Direct Calculation of Percent Reduction Goals from Turbidity Data

1. Background

Regression of censoring greater than 50% is not truly appropriate. However, there is no alternative to find relationship between TSS and turbidity for this study.

Percent reduction goals (PRGs) were computed directly from turbidity data and compared with regression method. PRG agreement between methods can be used as verification of regression method. For this purpose, 10% explicit MOS was applied in direct calculation to meet no more than 10% of the samples exceed the standards. Then, these PRGs were compared with PRGs from regression in this study.

2. Regression Methods

Except for the Beaver Creek, and Red River (LOC regression), censored data MLE regression was applied to all turbidity impaired waterbodies in this study. Censored data were about 50 to 94% of base flow TSS data. Regression methods were explained in Section 4.1 and results from this method were summarized in

Appendix Table F-1. MOS for MLE regression ranged from 10 to 25% because they were calculated based on NRMSE.

3. Results

PRGs from MLE method were greater than those from direct calculation, whereas PRGs from LOC method were similar to those from direct calculation. Therefore, MLE method was more conservative than direct calculation and MLE method is considered appropriate.

Appendix Table F-1 Percent Reduction Goals

WBID and Waterbody Name	MLE Method			Direct Calculations		
	TSS Target (mg/L)	MOS (%)	PRG (%)	Turbidity Target (NTU)	MOS (%)	PRG (%)
OK220600010100_20 Mill Creek	13	20	80.1	50	10	16.9
OK220600030010_00 Brushy Creek	13	20	53.7	50	10	43.0
OK220600040030_00 Beaver Creek	49	10	15.2	50	10	21.1
OK410210020150_00 Terrapin Creek	6	15	49.1	10	10	43.8
OK410400010010_20 Red River	54	10	18.3	50	10	15.1
OK410400020200_00 Caney Creek	22	25	55.5	50	10	37.1
OK410400080010_00 North Boggy Creek	13	20	52.8	50	10	52.5

Appendix G State of Oklahoma Antidegradation Policy

Appendix G

State of Oklahoma Antidegradation Policy

252:730-3-1. Purpose; Antidegradation policy statement

- (a) Waters of the state constitute a valuable resource and shall be protected, maintained and improved for the benefit of all the citizens.
- (b) It is the policy of the State of Oklahoma to protect all waters of the state from degradation of water quality, as provided in OAC 252:730-3-2 and Subchapter 13 of OAC 252:740.

252:730-3-2. Applications of antidegradation policy

- (a) Application to outstanding resource waters (ORW). Certain waters of the state constitute an outstanding resource or have exceptional recreational and/or ecological significance. These waters include streams designated "Scenic River" or "ORW" in Appendix A of this Chapter, and waters of the State located within watersheds of Scenic Rivers. Additionally, these may include waters located within National and State parks, forests, wilderness areas, wildlife management areas, and wildlife refuges, and waters which contain species listed pursuant to the federal Endangered Species Act as described in 252:730-5-25(c)(2)(A) and 252:740-13-6(c). No degradation of water quality shall be allowed in these waters.
- (b) Application to high quality waters (HQW). It is recognized that certain waters of the state possess existing water quality which exceeds those levels necessary to support propagation of fishes, shellfishes, wildlife, and recreation in and on the water. These high quality waters shall be maintained and protected.
- (c) Application to beneficial uses. No water quality degradation which will interfere with the attainment or maintenance of an existing or designated beneficial use shall be allowed.
- (d) Application to improved waters. As the quality of any waters of the state improve, no degradation of such improved waters shall be allowed.

252:740-13-1. Applicability and scope

- (a) The rules in this Subchapter provide a framework for implementing the antidegradation policy stated in OAC 252:730-3-2 and OAC 252:730-5-25 for all waters of the state. This policy and framework includes four tiers, or levels, of protection.
- (b) The four tiers of protection are as follows:
 - (1) Tier 1. Attainment or maintenance of an existing or designated beneficial use.
 - (2) Tier 2. Maintenance and protection Sensitive Water Supply-Reuse waterbodies.
 - (3) Tier 2.5 Maintenance and protection of High Quality Waters, Sensitive Public and Private Water Supply waters.
 - (4) Tier 3. No degradation of water quality allowed in Outstanding Resource Waters.
- (c) In addition to the four tiers of protection, this Subchapter provides rules to implement the protection of waters in areas listed in Appendix B of OAC 252:730. Although Appendix B areas are not mentioned in OAC 252:730-3-2, the framework for protection of

Appendix B areas is similar to the implementation framework for the antidegradation policy.

- (d) In circumstances where more than one beneficial use limitation exists for a waterbody, the most protective limitation shall apply. For example, all antidegradation policy implementation rules applicable to Tier 1 waterbodies shall be applicable also to Tier 2, Tier 2.5 and Tier 3 waterbodies or areas, and implementation rules applicable to Tier 2 waterbodies shall be applicable also to Tier 2.5 and Tier 3 waterbodies.
- (e) Publicly owned treatment works may use design flow, mass loadings or concentration, as appropriate, to calculate compliance with the increased loading requirements of this section if those flows, loadings or concentrations were approved by the Oklahoma Department of Environmental Quality as a portion of Oklahoma's Water Quality Management Plan prior to the application of the ORW, HQW, SWS, or SWS-R limitation.

252:740-13-2. Definitions

The following words and terms, when used in this Subchapter, shall have the following meaning, unless the context clearly indicates otherwise:

"Specified pollutants" means

- (A) Oxygen demanding substances, measured as Carbonaceous Biochemical Oxygen Demand (CBOD) and/or Biochemical Oxygen Demand (BOD);
- (B) Ammonia Nitrogen and/or Total Organic Nitrogen;
- (C) Phosphorus;
- (D) Total Suspended Solids (TSS); and
- (E) Such other substances as may be determined by DEQ or the permitting authority.

252:740-13-3. Tier 1 protection; attainment or maintenance of an existing or designated beneficial use

- (a) General.
 - (1) Beneficial uses which are existing or designated shall be maintained and protected.
 - (2) The process of issuing permits for discharges to waters of the state is one of several means employed by governmental agencies and affected persons which are designed to attain or maintain beneficial uses which have been designated for those waters. For example, Subchapters 3, 5, 7, 9 and 11 of this Chapter are rules for the permitting process. As such, the latter Subchapters not only implement numerical and narrative criteria, but also implement Tier 1 of the antidegradation policy.
- (b) Thermal pollution. Thermal pollution shall be prohibited in all waters of the state. Temperatures greater than 52 degrees Centigrade shall constitute thermal pollution and shall be prohibited in all waters of the state.
- (c) Prohibition against degradation of improved waters. As the quality of any waters of the state improves, no degradation of such improved waters shall be allowed.

252:740-13-4. Tier 2 protection; maintenance and protection of sensitive water supply-reuse and other tier 2 waterbodies

(a) General rules for Sensitive Water Supply – Reuse (SWS-R) Waters.

- (1) Classification of SWS-R Waters. DEQ may consider classification of a waterbody as an SWS-R waterbody based upon required documentation submitted by any interested party. The interested party shall submit documentation presenting background information and justification to support the classification of a waterbody as SWS-R including, but not limited to, the following:
 - (A) Determination of the waterbody's assimilative capacity pursuant to 252:740-13-8, including all supporting information and calculations.
 - (B) Documentation demonstrating that municipal wastewater discharge for the purpose of water supply augmentation has been considered as part of a local water supply plan or other local planning document.
 - (C) Any additional information or documentation necessary for DEQ's consideration of a request for the classification of a waterbody as SWS-R.
 - (D) Prior to consideration by DEQ, any interested party seeking the classification of a waterbody as SWS-R shall submit documentation to DEQ staff demonstrating that local stakeholders, including those that use the waterbody for any designated or existing beneficial uses, have been afforded notice and an opportunity for an informal public meeting, if requested, regarding the proposed classification of the waterbody as SWS-R at least one hundred eighty (180) days prior to DEQ consideration. In addition, all information or documentation submitted pursuant to this subsection shall be available for public review.
- (2) The drought of record waterbody level shall be considered the receiving water critical condition for SWS-R waterbodies.
 - (A) All beneficial uses shall be maintained and protected during drought of record conditions.
 - (B) Drought of record shall be determined with the permitting authority approved monthly time step model using hydrologic data with a minimum period of record from 1950 to the present. If empirical data are not available over the minimum period of record, modeled data shall be included in the analysis, if available.
- (3) In accordance with OAC 252:730-5-25(c)(8)(D), SWS-R waterbodies with a permitted discharge shall be monitored and water quality technically evaluated to ensure that beneficial uses are protected and maintained and use of assimilative capacity does not exceed that prescribed by permit. Prior to any monitoring and/or technical analysis, the permittee shall submit a Receiving Water Monitoring and Evaluation Plan to the permitting authority for review and approval.
 - (A) The Receiving Water Monitoring and Evaluation Plan shall include, at a minimum, 17 the following sections:
 - (i) Monitoring section that meets the required spatial, temporal, and parametric coverage of this subchapter, OAC 252:740-15, and OAC 252:628-11.

- (ii) Analysis and reporting section that meets the requirements of this subchapter, OAC 252:740-15, and OAC 252:628-11.
 - (iii) Quality Assurance Project Plan that meets the most recent requirements for United States Environmental Protection Agency Quality Assurance Project Plans.
 - (B) The monitoring section of the Receiving Water Monitoring and Evaluation Plan, at a minimum shall:
 - (i) Include parametric, temporal (including frequency of sampling events), and spatial sampling design adequate to characterize water quality related to limnological, hydrologic, seasonal, and diurnal influences and variation.
 - (ii) Include nutrient monitoring adequate to characterize both external and internal loading and nutrient cycling.
 - (iii) Include algal biomass monitoring consistent with this sub-paragraph (B) and phytoplankton monitoring sufficient to evaluate general shifts and/or trends in phytoplankton community dynamics over time.
 - (iv) Include in-situ monitoring of dissolved oxygen, temperature, and pH adequate to characterize diurnal changes and fluctuations during periods of thermal stratification and complete mix.
 - (v) Include monitoring of pollutants with a permit effluent limit and/or permit monitoring requirements.
 - (C) The Receiving Water Monitoring and Evaluation Plan may include special studies, as necessary.
 - (D) At least biennially and prior to permit renewal, the permittee shall submit a Receiving Water Monitoring and Evaluation Report to the permitting authority that includes, at a minimum:
 - (i) Summarized review of monitoring objectives and approach.
 - (ii) Presentation and evaluation of monitoring results, including an analysis of both short-term and long-term trends.
 - (iii) An assessment of beneficial use attainment that is at a minimum in accordance with OAC 252:740-15.
 - (iv) Summarized assessment of data quality objectives, including an explanation of any data quality issues.
 - (v) All monitoring data shall be submitted electronically.
 - (E) If the report documents nonattainment of a beneficial use(s) resulting from the discharge, the permitting authority shall consider actions including, but not limited to, additional permit requirements, cessation of the discharge, and/or a recommendation to DEQ to revoke the SWS-R waterbody classification.
- (b) General rules for other Tier 2 Waterbodies.
- (1) General rules for other Tier 2 waterbodies shall be developed as waters are identified.

- (c) Stormwater discharges. Regardless of subsections (a) and (b) of this Section, point source discharges of stormwater to waterbodies and watersheds designated "HQP" and "SWS" may be approved by the permitting authority.
- (d) Nonpoint source discharges or runoff. Best management practices for control of nonpoint source discharges or runoff should be implemented in watersheds of waterbodies designated "HQP" or "SWS" in Appendix A of OAC 252:730.

252:740-13-5. Tier 2.5 protection; maintenance and protection of high quality waters, sensitive water supplies, and other tier 2.5 waterbodies

- (a) General rules for High Quality Waters. New point source discharges of any pollutant after June 11, 1989, and increased load or concentration of any specified pollutant from any point source discharge existing as of June 11, 1989, shall be prohibited in any waterbody or watershed designated in Appendix A of OAC 252:730 with the limitation "HQP". Any discharge of any pollutant to a waterbody designated "HQP" which would, if it occurred, lower existing water quality shall be prohibited. Provided however, new point source discharges or increased load or concentration of any specified pollutant from a discharge existing as of June 11, 1989, may be approved by the permitting authority in circumstances where the discharger demonstrates to the satisfaction of the permitting authority that such new discharge or increased load or concentration would result in maintaining or improving the level of water quality which exceeds that necessary to support recreation and propagation of fishes, shellfishes, and wildlife in the receiving water.
- (b) General rules for sensitive public and private water supplies. New point source discharges of any pollutant after June 11, 1989, and increased load of any specified pollutant from any point source discharge existing as of June 11, 1989, shall be prohibited in any waterbody or watershed designated in Appendix A of OAC 252:730 with the limitation "SWS". Any discharge of any pollutant to a waterbody designated "SWS" which would, if it occurred, lower existing water quality shall be prohibited. Provided however, new point source discharges or increased load of any specified pollutant from a discharge existing as of June 11, 1989, may be approved by the permitting authority in circumstances where the discharger demonstrates to the satisfaction of the permitting authority that such new discharge or increased load will result in maintaining or improving the water quality in both the direct receiving water, if designated SWS, and any downstream waterbodies designated SWS.
- (c) Stormwater discharges. Regardless of subsections (a) and (b) of this Section, point source discharges of stormwater to waterbodies and watersheds designated "HQP", "SWS" may be approved by the permitting authority.
- (d) Nonpoint source discharges or runoff. Best management practices for control of nonpoint source discharges or runoff should be implemented in watersheds of waterbodies designated "HQP", or "SWS" in Appendix A of OAC 252:730.

252:740-13-6. Tier 3 protection; prohibition against degradation of water quality in outstanding resource waters

- (a) General. New point source discharges of any pollutant after June 11, 1989, and increased load of any pollutant from any point source discharge existing as of June 11, 1989, shall be prohibited in any waterbody or watershed designated in Appendix A of OAC 252:730

with the limitation "ORW" and/or "Scenic River", and in any waterbody located within the watershed of any waterbody designated with the limitation "Scenic River". Any discharge of any pollutant to a waterbody designated "ORW" or "Scenic River" which would, if it occurred, lower existing water quality shall be prohibited.

- (b) Stormwater discharges. Regardless of 252:740-13-6(a), point source discharges of stormwater from temporary construction activities to waterbodies and watersheds designated "ORW" and/or "Scenic River" may be permitted by the permitting authority. Regardless of 252:740-13-6(a), discharges of stormwater to waterbodies and watersheds designated "ORW" and/or "Scenic River" from point sources existing as of June 25, 1992, whether or not such stormwater discharges were permitted as point sources prior to June 25, 1992, may be permitted by the permitting authority; provided, however, increased load of any pollutant from such stormwater discharge shall be prohibited.
- (c) Nonpoint source discharges or runoff. Best management practices for control of nonpoint source discharges or runoff should be implemented in watersheds of waterbodies designated "ORW" in Appendix A of OAC 252:730, provided, however, that development of conservation plans shall be required in sub-watersheds where discharges or runoff from nonpoint sources are identified as causing or significantly contributing to degradation in a waterbody designated 19 "ORW".
- (d) LMFO's. No licensed managed feeding operation (LMFO) established after June 10, 1998 which applies for a new or expanding license from the State Department of Agriculture after March 9, 1998 shall be located...[w]ithin three (3) miles of any designated scenic river area as specified by the Scenic Rivers Act in 82 O.S. Section 1451 and following, or [w]ithin one (1) mile of a waterbody [2:9-210.3(D)] designated in Appendix A of OAC 252:730 as "ORW".

252:740-13-7. Protection for Appendix B areas

- (a) General. Appendix B of OAC 252:730 identifies areas in Oklahoma with waters of recreational and/or ecological significance. These areas are divided into Table 1, which includes national and state parks, national forests, wildlife areas, wildlife management areas and wildlife refuges; and Table 2, which includes areas which contain threatened or endangered species listed as such by the federal government pursuant to the federal Endangered Species Act as amended.
- (b) Protection for Table 1 areas. New discharges of pollutants after June 11, 1989, or increased loading of pollutants from discharges existing as of June 11, 1989, to waters within the boundaries of areas listed in Table 1 of Appendix B of OAC 252:730 may be approved by the permitting authority under such conditions as ensure that the recreational and ecological significance of these waters will be maintained.
- (c) Protection for Table 2 areas. Discharges or other activities associated with those waters within the boundaries listed in Table 2 of Appendix B of OAC 252:730 may be restricted through agreements between appropriate regulatory agencies and the United States Fish and Wildlife Service. Discharges or other activities in such areas shall not substantially disrupt the threatened or endangered species inhabiting the receiving water.
- (d) Nonpoint source discharges or runoff. Best management practices for control of nonpoint source discharges or runoff should be implemented in watersheds located within areas listed in Appendix B of OAC 252:730.

252:740-13-8. Antidegradation review in surface waters

- (a) General. The antidegradation review process below presents the framework to be used when making decisions regarding the intentional lowering of water quality, where water quality is better than the minimum necessary to protect beneficial uses. OWRB technical guidance TRWQ2017-01 provides additional information.
- (b) Determination of Assimilative Capacity in Tier 2, Tier 2.5, and Tier 3 Waters.
 - (1) All water quality monitoring and technical analyses necessary to determine receiving waterbody assimilative capacity for all applicable numeric and narrative criteria and associated parameters protective of waterbody beneficial uses shall be conducted by the interested party.
 - (2) Prior to initiating any monitoring or technical analysis to support determination of waterbody assimilative capacity, the interested party shall submit a workplan consistent with the requirements of OWRB technical guidance TRWQ2017-01 for review and approval by DEQ staff.
 - (3) As part of an approved workplan, the interested party shall characterize existing water quality of the receiving waterbody for each applicable criteria and associated parameters and evaluate if there is available assimilative capacity. Consistent with OWRB technical guidance TRWQ2017-01, characterization of existing water quality shall address, at a minimum:
 - (A) Measurement of load and or concentration for all applicable criteria and associated parameter(s) in the receiving water; and
 - (B) The measurement of both existing and proposed point and nonpoint source discharge concentrations and or loadings, including the measurement of external and internal nutrient loading, where required by OWRB technical guidance TRWQ2017-01; and
 - (C) The critical low flow or critical lake level of the receiving waterbody, including drought of record in waterbodies receiving IPR discharges; and
 - (D) The limnological, hydrologic, seasonal, spatial and temporal variability and critical conditions of the waterbody; and
 - (E) Volumetric determination of anoxic dissolved oxygen condition consistent with OAC 252:730 and 252:740; and
 - (F) The bioaccumulative nature of a pollutant shall be considered when determining assimilative capacity; and
 - (G) The 303(d) list as contained in the most recently approved Integrated Water Quality Assessment Report shall be reviewed and any difference between the water quality assessment information and the characterization of existing water quality shall be reconciled.
 - (4) Assimilative capacity shall be determined by comparing existing water quality, as determined consistent with subsection (a)(3) above to the applicable narrative and numeric criteria. In Tier 2 waters, assimilative capacity shall be determined and used with a margin(s) of safety (252:740-13-8(d)(1)(D)), which takes into account any uncertainty between existing or proposed discharges and impacts on receiving water quality.
 - (5) When existing water quality does not meet the criterion or associated parameter necessary to support beneficial use(s) or is identified as impaired on Oklahoma's

- 303(d) list as contained in the most recently approved Integrated Water Quality Assessment Report, no assimilative capacity shall exist for the given criterion.
- (c) Use of Assimilative Capacity in Tier 1 Waters. Available assimilative capacity may be used in Tier 1 waters such that, water quality is maintained to fully protect all designated and existing beneficial uses.
- (d) Use of Assimilative Capacity in Tier 2 Waters.
- (1) If it is determined that assimilative capacity is available, the consumption of assimilative capacity may be allowed in a manner consistent with the requirements in 40 CFR 131.12(a)(2) and this subchapter. In allowing the use of assimilative capacity, the state shall assure that:
- (A) Water quality shall be maintained to fully protect designated and existing beneficial uses.
- (B) Assimilative capacity shall be reserved such that all applicable narrative criteria in OAC 252:730 are attained and beneficial uses are protected.
- (C) Fifty percent (50%) of assimilative capacity shall be reserved for all applicable water quality criteria listed in OAC 252:730, Appendix G, Table 2.
- (D) In order to preserve a margin of safety; in no case shall any activity be authorized without the application of margin(s) of safety specified below:
- (i) A twenty percent (20%) margin of safety shall be applied to an applicable numeric criterion for chlorophyll-a, total phosphorus, and total nitrogen. If numeric criteria are not available, the narrative nutrient criterion (252:730-5-9(d)) shall be applied and a twenty percent (20%) margin of safety shall be applied to the parameters listed in the criterion.
- (ii) No more than forty-five percent (45%) of the lake volume shall be less than the dissolved oxygen criterion magnitude in OAC 252:730-5-12(f)(1)(C)(ii).
- (iii) If the existing value of a criterion is within the margin of safety, no assimilative capacity is available and existing water quality shall be maintained or improved.
- (E) When existing water quality does not satisfy the applicable criterion and support beneficial use(s) or has been designated as impaired in Oklahoma's 303(d) list as contained in the most recently approved Integrated Water Quality Assessment Report, the applicable criterion shall be met at the point of discharge. If a TMDL has been approved for the impairment, loading capacity for the parameter may be available if TMDL load allocations include the proposed load from the discharge.
- (2) An analysis of alternatives shall evaluate a range of practicable alternatives that would prevent or lessen the water quality degradation associated with the proposed activity. When the analysis of alternatives identifies one or more practicable alternatives, the State shall only find that a lowering is necessary if one such alternative is selected for implementation.
- (3) After an analysis of alternatives and an option that utilizes any or all of the assimilative capacity is selected, the discharger must demonstrate that the lowering of water quality is necessary to accommodate important economic or social development in the area in which the waters are located.
- (e) Use of Assimilative Capacity in Tier 2.5 or 3.0 Waters. Consistent with 252:730-3-2(a) - (c), 252:730-5-25(a), 252:730-5-25(b), and 252:730-5-25(c)(1) – (c)(6) all

available assimilative capacity shall be reserved in waterbodies classified as Tier 2.5 or 3.0 waters.

- (f) Public Participation. Agencies implementing subsection 8(d), shall conduct all activities with intergovernmental coordination and according to each agency's public participation procedures, including those specified in Oklahoma's continuing planning process.

Appendix H Stormwater Permitting Requirements and Presumptive Best Management Practices (BMP) Approach

Stormwater Permitting Requirements and Presumptive Best Management Practices (BMPs) Approach

A. Background

The National Pollutant Discharge Elimination System (NPDES) permitting program for stormwater discharges was established under the Clean Water Act as the result of a 1987 amendment. The Act specifies the level of control to be incorporated into the NPDES stormwater permitting program depending on the source (industrial versus municipal stormwater). These programs contain specific requirements for the regulated communities/facilities to establish a comprehensive stormwater management program (SWMP) or stormwater pollution prevention plan (SWPPP) to implement any requirements of the total maximum daily load (TMDL) allocation. [See 40 CFR § 130.]

Stormwater discharges are highly variable both in terms of flow and pollutant concentration, and the relationships between discharges and water quality can be complex. For municipal stormwater discharges in particular, the current use of system-wide permits and a variety of jurisdiction-wide BMPs, including educational and programmatic BMPs, does not easily lend itself to the existing methodologies for deriving numeric water quality-based effluent limitations. These methodologies were designed primarily for process wastewater discharges which occur at predictable rates with predictable pollutant loadings under low flow conditions in receiving waters.

EPA has recognized these problems and developed permitting guidance for stormwater permits. [See “Interim Permitting Approach for Water Quality-Based Effluent Limitations in Stormwater Permits” (EPA-833-D-96-00, Date published: 09/01/1996)] Due to the nature of stormwater discharges, and the typical lack of information on which to base numeric water quality-based effluent limitations (expressed as concentration and mass), EPA recommends an interim permitting approach for OPDES stormwater permits which is based on BMPs. “The interim permitting approach uses best management practices (BMPs) in first-round stormwater permits, and expanded or better-tailored BMPs in subsequent permits, where necessary, to provide for the attainment of water quality standards.” (*ibid.*)

A monitoring component is also included in the recommended BMP approach. “Each storm water permit should include a coordinated and cost-effective monitoring program to gather necessary information to determine the extent to which the permit provides for attainment of applicable water quality standards and to determine the appropriate conditions or limitations for subsequent permits.” (*ibid.*)

This approach was further elaborated in a guidance memo issued in 2002. [See Memorandum from Robert Wayland, Director of OWOW and James Hanlon, Director of OWM to Regional Water Division Directors: “Establishing Total Maximum Daily Load (TMDL) Wasteload Allocations (WLAs) for Storm Water Sources and NPDES Permit requirements Based on Those WLAs ” (Date published: 11/22/2002)] “The policy outlined in this memorandum affirms the appropriateness of an iterative, adaptive management BMP approach, whereby permits include effluent limits (e.g., a combination of structural and non-structural BMPs) that address stormwater discharges, implement mechanisms to evaluate the performance of such controls, and make adjustments (i.e., more stringent controls or specific BMPs) as necessary

to protect water quality. If it is determined that a BMP approach (including an iterative BMP approach) is appropriate to meet the stormwater component of the TMDL, EPA recommends that the TMDL reflect this.” This BMP-based approach to stormwater sources in TMDLs is also recognized and described in the most recent EPA guidance. [See “TMDLs to Stormwater Permits Handbook” (DRAFT), EPA, November 2008] This TMDL adopts the EPA recommended approach and relies on appropriate BMPs for implementation. No numeric effluent limitations are required or anticipated for municipal stormwater discharge permits.

B. Specific SWMP/SWPPP Requirements

As noted in SECTION 3 of this report, Oklahoma Pollutant Discharge Elimination System (OPDES)-permitted facilities and non-point sources (e.g., wildlife, agricultural activities and domesticated animals, land application fields, urban runoff, failing onsite wastewater disposal system, and domestic pets) could contribute to exceedances of the water quality criteria. In particular, stormwater runoff from the Phase I and II Municipal Separate Storm Sewer Systems (MS4s) is likely to contain elevated bacterial concentrations. Permits for these discharges must comply with the provisions of this TMDL. **Appendix Table H-1** provides a list of Phase I and II MS4s that are affected by this bacterial TMDL report.

Agricultural activities and other nonpoint sources of bacteria are unregulated. Voluntary measures and incentives should be used and encouraged wherever possible and such sources should strive to attain the reduction goals established in this TMDL.

Appendix Table H-1 MS4 Permit affected by this TMDL Report

Entity	Permit No.	MS4 Phase	Date Issued
Town of Arkoma	OKR040051	Phase 2 MS4	02/27/2018

The provisions of this appendix apply only to OPDES/NPDES regulated stormwater discharges. Regulated CAFOs within the watershed operate under NPDES permits issued and overseen by EPA. In order to comply with this TMDL, those CAFO permits in the watershed and their associated management plans must be reviewed. Further actions to reduce bacterial loads and achieve progress toward meeting the specified reduction goals must be implemented. This provision will be forwarded to EPA, as the responsible permitting agency, for follow up.

To ensure compliance with the TMDL requirements under the permit, stormwater permittees must develop strategies designed to achieve progress toward meeting the reduction goals established in the TMDL. Relying primarily upon a Best Management Practices (BMP) approach, permittees should take advantage of existing information on BMP performance and select a suite of BMPs appropriate to the local community that are expected to result in progress toward meeting the reduction goals established in the TMDL. The permittee should provide guidance on BMP installation and maintenance, as well as a monitoring and/or inspection schedule.

Appendix Table H-2 provides a summary description of some BMPs with reported effectiveness in reducing bacteria. Permittees may choose different BMPs to meet the

permit requirements, as long as the permittees demonstrate that these practices will result in progress toward attaining water quality standards.

As noted above, when a BMP approach is selected a coordinated monitoring program is necessary to establish the effectiveness of the selected BMPs and demonstrate progress toward attaining water quality standards. The monitoring results should be used to refine bacterial controls in the future. With nine permitted entities in the watershed, it is likely that a cooperative monitoring program would be more cost effective than nine individual programs. Individual permittees are not required to participate in a coordinated program and are free to develop their own program if desired.

After EPA approval of the final TMDL, existing MS4 permittees will be notified of the TMDL provisions and schedule. Industrial stormwater permittees are not expected to be a significant source of bacteria. But if any are identified, similar actions will be required.

Compliance with the following provisions will constitute compliance with the requirements of this TMDL.

1. Develop a Bacterial Reduction Plan

Permittees shall submit an approvable Bacterial Reduction Plan to the DEQ within 24 months of EPA approval of this TMDL. Unless disapproved by the Director within 60 days of submission, the plan shall be approved and then implemented by the permittee. This plan shall, at a minimum, include the following:

- a. Consideration of ordinances or other regulatory mechanisms to require bacterial pollution control, as well enforcement procedures for noncompliance.
- b. Evaluation of the existing SWMP in relation to TMDL reduction goals
- c. Develop an evaluation to identify potential significant sources of bacteria entering your MS4. Develop (or modify an existing program as necessary) and implement a program to reduce the discharge of bacteria in municipal stormwater contributed by any other significant source identified in the source identification evaluation.
- d. Educational programs directed at reducing bacterial pollution. Implement a public education program to reduce the discharge of bacteria in municipal stormwater contributed (if applicable) by pets, recreational and exhibition livestock, and zoos.
- e. Investigation and implementation of BMPs associated with development. These BMPs should prevent additional stormwater bacterial pollution associated with new development and re-development.
- f. Develop (or modify an existing program as necessary) and implement a program to reduce the discharge of bacteria in municipal stormwater contributed by areas within your MS4 served by on-site wastewater treatment systems.
- g. Implementation of BMPs applicable to bacteria - Appendix Table H-2 presents summary information on some BMPs that may be considered. Permittees are not limited to BMPs on this list and should select BMPs appropriate to the local community

- that are expected to result in progress toward meeting the reduction goals established in the TMDL.
- h. Modifications to the dry weather field screening and illicit discharge detection and elimination provisions of the SWMP to consider stormwater sampling and other measures intended to specifically identify bacterial pollution sources and high priority areas for bacterial reductions.
 - i. Periodic evaluation of the effectiveness of the bacterial reduction plan to ensure progress toward attainment of water quality standards.
 - j. An implementation schedule leading to modification of the SWMP and full implementation of the plan within three years of notification.

2. Develop or Participate in a Bacterial Monitoring Program

Permittees may participate in a coordinated regional bacterial monitoring program or develop their own individual program. The monitoring program should be designed to establish the effectiveness of the selected BMPs and demonstrate progress toward achieving the reduction goals of the TMDL and eventual attainment of water quality standards.

- a. Within 24 months of EPA approval of this TMDL, the permittee shall prepare and submit to the DEQ either a TMDL monitoring plan or a commitment to participate in a coordinated regional monitoring program. Unless disapproved by the Director within 60 days of submission, the plan shall be approved and then implemented by the permittee. The plan or program shall include:
 - (1). A detailed description of the goals, monitoring, and sampling and analytical methods
 - (2). A list and map of the selected TMDL monitoring sites
 - (3). The frequency of data collection to occur at each station or site
 - (4). The parameters to be measured, as appropriate for and relevant to the TMDL
 - (5). A Quality Assurance Project Plan that complies with EPA requirements [[EPA Requirements for QA Project Plans \(QA/R-5\)](#)]
- b. The monitoring program shall be fully implemented within three years of notification.

3. Annual Reporting

The permittee shall include a TMDL implementation report as part of their annual report. The TMDL implementation report shall include the status and actions taken by the permittee to implement the Bacterial Reduction Plan and monitoring program. The TMDL implementation report shall document relevant actions taken by the permittee that affect MS4 stormwater discharges to the waterbody segments that are the subject of the TMDL. This TMDL implementation report also shall identify the status of any applicable TMDL implementation schedule milestones.

Appendix Table H-2 Some BMPs Applicable to Bacteria

BEST MANAGEMENT PRACTICE	Impairment Source		Reported Efficiency	Note
	Agriculture	Urban		
Animal waste management: A planned system designed to manage liquid and solid waste from livestock and poultry. It improves water quality by storing and spreading waste at the proper time, rate and location.	X		75% ¹	
Artificial wetland/rock reed microbial filter: A long shallow hydroponic plant/rock filter system that treats polluted waste and wastewater. It combines horizontal and vertical flow of water through the filter, which is filled with aquatic and semi-aquatic plants and microorganisms and provides a high surface area of support media, such as rocks or crushed stone.	X	X		
Compost facility: Treating organic agricultural wastes in order to reduce the pollution potential to surface and ground water. The composting facility must be constructed, operated and maintained without polluting air and/or water resources.	X	X		Permit may be needed
Conservation landscaping: The placement of vegetation in and around stormwater management BMPs. Its purpose is to help stabilize disturbed areas, enhance the pollutant removal capabilities of stormwater BMP, and improve the overall aesthetics of a stormwater BMP.		X		
Diversions: Establishing a channel with a supporting ridge on the lower side constructed along the general land slope which improves water quality by directing nutrient and sediment laden water to sites where it can be used or disposed of safely.	X	X		
Drain Inlet Inserts: A proprietary BMP that is generally easily installed in a drain inlet or catch basin to treat stormwater runoff. Three basic types of inlet insert are available, the tray type, bag type and basket type. The tray type allows flow to pass through filter media residing in a tray located around the perimeter of the inlet.	X	X	5% ²	
Dry detention pond/basin: Detention ponds/basins that have been designed to temporarily detain stormwater runoff. These ponds fill with stormwater and release it over a period of a few days. They can also be used to provide flood control by including additional flood detention storage.	X	X	40% ² 51% ³ 88% ⁴	
Earthen embankments: A raised impounding structure made from compacted soil. It is appropriate for use with infiltration, detention, extended-detention or retention facilities.	X	X		
Drip irrigation: An irrigation method that supplies a slow, even application of low-pressure water through polyethylene tubing running from supply line directly to a plant's base. Water soaks into the soil gradually, reducing runoff and evaporation (i.e., salinity). Transmission of nutrients and pathogens spread by splashing water and wet foliage created by overhead sprinkler irrigation is greatly reduced. Weed growth is minimized, thereby reducing herbicide applications. Vegetable farming and virtually every type of landscape situation can benefit from the use of drip irrigation.	X	X		
Fencing: A constructed barrier to livestock, wildlife or people. Standard or conventional (barbed or smooth wire), suspension, woven wire, or electric fences consist of acceptable fencing designs to control the animal(s) or people of concern and meet the intended life of the practice.	X		75% ¹	

BEST MANAGEMENT PRACTICE	Impairment Source		Reported Efficiency	Note
	Agriculture	Urban		
Filtration (e.g., sand filters): Intermittent sand filters capture, pre-treat to remove sediments, store while awaiting treatment, and treat to remove pollutants (by percolation through sand media) the most polluted stormwater from a site. Intermittent sand filter BMPs may be constructed in underground vaults, in paved trenches within or at the perimeter of impervious surfaces, or in either earthen or concrete open basins.	X	X	30% ¹ 55% ² 37% ⁴	
Infiltration Basin: A vegetated open impoundment where incoming stormwater runoff is stored until it gradually infiltrates into the soil strata. While flooding and channel erosion control may be achieved within an infiltration basin, they are primarily used for water quality enhancement.		X	50% ¹	
Infiltration Trench: A shallow, excavated trench backfilled with a coarse stone aggregate to create an underground reservoir. Stormwater runoff diverted into the trench gradually infiltrates into the surrounding soils from the bottom and sides of the trench. The trench can be either an open surface trench or an underground facility.		X	50% ¹	
Irrigation water management: The process of determining and controlling the volume, frequency, and application rate of irrigation water in a planned, efficient manner. An irrigation system adapted for site conditions (soil, slope, crop grown, climate, water quantity and quality, etc.) must be available and capable of applying water to meet the intended purpose(s).	X	X		
Lagoon pump out: A waste treatment impoundment made by constructing an embankment and/or excavating a pit or dugout in order to biologically treat waste (such as manure and wastewater) and thereby reduce pollution potential by serving as a treatment component of a waste management system.	X	X		
Land-use conversion: BMPs that involve a change in land use in order to retire land contributing detrimentally to the environment. Some examples of BMPs with associated land use changes are: Conservation Reserve Program (CRP) - cropland to pasture; Forest conservation - previous urban to forest; Forest/grass buffers - cropland to forest/pasture; Tree planting - cropland/pasture to forest; and Conservation tillage – conventional tillage to conservation tillage.	X	X		
Limit livestock access: Excluding livestock from areas where grazing or trampling will cause erosion of stream banks and lowering of water quality by livestock activity in or adjacent to the water. Limitation is generally accomplished by permanent or temporary fencing. In addition, installation of an alternative water source away from the stream has been shown to reduce livestock access.	X			
Litter control: Litter includes larger items and particulates deposited on street surfaces, such as paper, vegetation residues, animal feces, bottles and broken glass, plastics and fallen leaves. Litter-control programs can reduce the amount of deposition of pollutants by as much as 50%, and may be an effective measure of controlling pollution by storm runoff.		X		
Livestock water crossing facility: Providing a controlled crossing for livestock and/or farm machinery in order to prevent streambed erosion and reduce sediment.	X		100% ¹	

BEST MANAGEMENT PRACTICE	Impairment Source		Reported Efficiency	Note
	Agriculture	Urban		
Manufactured BMP systems: Structural measures which are specifically designed and sized by the manufacturer to intercept stormwater runoff and prevent the transfer of pollutants downstream. They are used solely for water quality enhancement in urban and ultra-urban areas where surface BMPs are not feasible.	X	X		
Onsite treatment system installation: Conventional onsite wastewater treatment and disposal system (onsite system) consists of three major components: a septic tank, a distribution box, and a subsurface soil absorption field (consisting of individual trenches). This system relies on gravity to carry household waste to the septic tank, move effluent from the septic tank to the distribution box, and distribute effluent from the distribution box throughout the subsurface soil absorption field. All of these components are essential for a conventional onsite system to function in an acceptable manner.		X		
Porous pavement: An alternative to conventional pavement, it is made from asphalt (in which fine filler fractions are missing) or modular or poured-in concrete pavements. Its use allows rainfall to percolate through it to the sub-base, providing storage and enhancing soil infiltration that can be used to reduce runoff and combined sewer overflows. The water stored in the sub-base then gradually infiltrates the subsoil.		X	50% ¹	
Proper site selection for animal feeding facility: Establishing or relocating confined feeding facilities away from environmentally vulnerable areas such as sinkholes, streams, and rivers in order to reduce or eliminate the amount of pollutant runoff reaching these areas.	X			
Raingarden/bio-retention basin: Rain gardens are landscaped gardens of trees, shrubs, and plants located in commercial or residential areas in order to treat stormwater runoff through temporary collection of the water before infiltration. They are slightly depressed areas into which stormwater runoff is channeled by pipes, curb openings, or gravity.		X	40% ¹	
Range and pasture management: Systems of practices to protect the vegetative cover on improved pasture and native rangelands. It includes practices such as seeding or reseeding, brush management (mechanical, chemical, physical, or biological), proper stocking rates and proper grazing use, and deferred rotational systems.	X		50% ¹	
Wet retention ponds/basins: A stormwater facility that includes a permanent pool of water and, therefore, is normally wet even during non-rainfall periods. Inflows from stormwater runoff may be temporarily stored above this permanent pool.	X	X	32% ¹ 70% ⁴	
Riparian buffer zones: A protection method used along streams to reduce erosion, sedimentation, and the pollution of water from agricultural non-point sources.	X	X	43–57% ¹	Forested buffer w/o incentive payment

BEST MANAGEMENT PRACTICE	Impairment Source		Reported Efficiency	Note
	Agriculture	Urban		
Septic system pump-out: A typical septic system consists of a tank that receives waste from a residence or business, and a drain field or subsurface absorption system consisting of a series of percolation lines for the disposal of the liquid effluent. Solids (sludge) that remain after decomposition by bacteria in the tank must be pumped out periodically.		X	5% ¹	
Sewer line maintenance (e.g., sewer flushing): Sewer flushing during dry weather is designed to periodically remove solids that have deposited on the bottom of the sewer and the biological slime that grows on the walls of combined sewers during periods of low-flow. Flushing is especially necessary in sewer systems that have low grades which has resulted in velocities during low-flow periods that fall below those needed for self-cleaning.		X		
Stream bank protection and stabilization (e.g., riprap, gabions): Stabilizing shoreline areas that are being eroded by landscaping, constructing bulkheads, riprap revetments, gabion systems, or establishing vegetation.	X	X	40-75% ¹	40 % w/o fencing; 75 % w/fencing
Street sweeping: The practice of passing over an impervious surface, usually a street or a parking lot, with a vacuum or a rotating brush for the purpose of collecting and disposing of accumulated debris, litter, sand and sediments. In areas with defined wet and dry seasons, sweeping prior to the wet season is likely to be beneficial; following snowmelt and heavy leaf fall are also opportune times.		X		
Terrace: An earth embankment, or a combination ridge and channel, constructed across the field slope. Terraces can be used when there is a need to conserve water, excessive runoff is a problem, and the soils and topography are such that terraces can be constructed and farmed with reasonable effort.	X	X		
Vegetated filter strip: A densely vegetated strip of land engineered to accept runoff from upstream development as overland sheet flow. It may adopt any naturally vegetated form, from grassy meadow to small forest. The purpose of a vegetated filter strip is to enhance the quality of stormwater runoff through filtration, sediment deposition, infiltration and absorption.	X	X	<30% ³	
Waste system/storage (e.g., lagoons, litter shed): Waste treatment lagoons biologically treat liquid waste to reduce the nutrient and BOD content. Lagoons must be emptied and their contents disposed of properly.	X	X	80–100% ¹	
Water treatment (e.g., disinfection, flocculation, carbon filter system): Physical, chemical and/or biological processes used to treat concentrated discharges. Physical-chemical processes that have been demonstrated to effectively treat discharge include sedimentation, vortex separation, screening (e.g., fine-mesh screening), and sand-peat filters. Chemical additives used to enhance separation of particles from liquid include chemical coagulants such as lime, alum, ferric chloride, and various polyelectrolytes. Biological processes that have been demonstrated to effectively treat discharges include contact stabilization, biodiscs, oxidation ponds, aerated lagoons, and facultative lagoons.	X	X		

BEST MANAGEMENT PRACTICE	Impairment Source		Reported Efficiency	Note
	Agriculture	Urban		
Wetland development/enhancement: The construction of a wetland for the treatment of animal waste runoff or stormwater runoff. Wetlands improve water quality by removing nutrients from animal waste or sediments and nutrients from stormwater runoff.	X	X	30% ¹ 78% ⁴	Including creation and restoration

Sources

- ¹ BMP Efficiencies Chesapeake Bay Watershed Model (PhaseIV) August 1999; Draft FC and Nitrate TMDL IP for Dry River (2001); EPA (1998); EPA (1999b); Novotny (1994); Storm Water Best Management Practice Categories and Pollutant Removal Efficiencies (2003); USDA (2003); DCR (1999); DEQ/DCR (2001).
- ² Barrett, M.E., Complying with the Edwards Aquifer Rules: Technical Guidance on Best Management Practices, Texas Natural Resource Conservation Commission Report RG-348, June (1999).
- ³ The Expected Pollutant Removal (Percent) Data Adapted from US EPA, 1993C.
- ⁴ National Pollutant Removal Performance Database, Version 3, September, 2007